

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Antenna](#)
[A6150](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Impexa 2.4 GHz SMD Antenna

Part No. A6150

gigaNOVA®

Product Specification

1 Features

- Designed for 2.4 GHz applications: Bluetooth®, Wi-Fi® (802.11b/g), ZigBee®, etc.
- Easy to integrate
- Low profile design for use with no ground beneath the antenna
- High efficiency
- Light weight
- Intended for SMD mounting
- Supplied in tape on reel

2 Description

Impexa is intended for use with all 2.4 GHz applications. The antenna uses a ground plane in order to radiate efficiently, but this ground plane must not extend underneath the antenna itself.

The antenna has the feed location on the left of the antenna.

3 Applications


- Mobile phones
- PDAs
- PNDs
- Headsets
- PMPs / MP3s
- Laptops
- PC-Cards
- Sensors



Impexa 2.4 GHz SMD Antenna
Part No. A6150

4 Part numbers

Impexa A6150



5 General data

| | |
|-------------------------|----------------------|
| Product name | Impexa 2.4 GHz |
| Part Number | A6150 |
| Frequency | 2.4 – 2.5 GHz |
| Polarization | Linear |
| Operating temperature | -40 °C to +85 °C |
| Impedance with matching | 50 Ω |
| Weight | 0.05 g |
| Antenna type | SMD |
| Dimensions | 6.1 x 3.9 x 1.1 [mm] |


6 Electrical characteristics

| | Typical performance | Conditions |
|---------------------|---------------------|--|
| Peak gain | 1.0 dBi | All data measured on Antenova's reference boards, part numbers A6150-U1 and A6250-U1 Data given for the 2.4 – 2.5 GHz frequency range |
| Average gain | -1.9 dBi | |
| Average efficiency | 65% | |
| Maximum Return Loss | -10 dB | |
| Maximum VSWR | 1.9:1 | |


Impexa 2.4 GHz SMD Antenna
Part No. A6150

7 Electrical performance

7-1 Return Loss





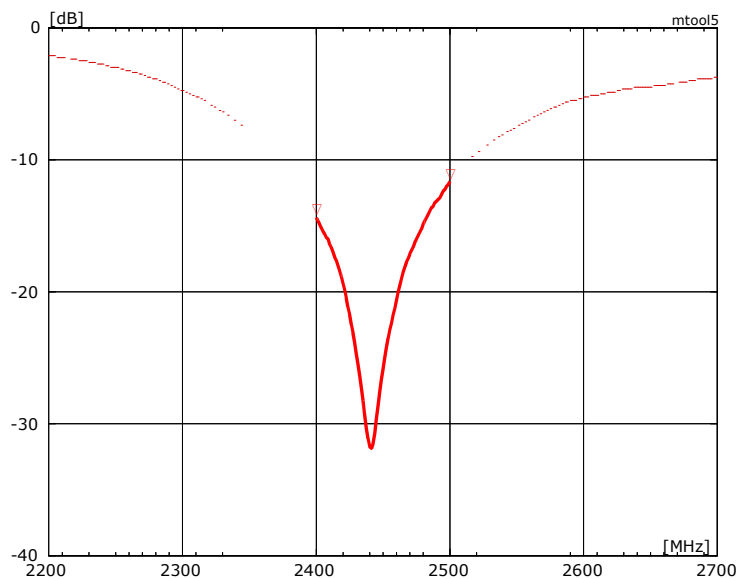


7-2 VSWR

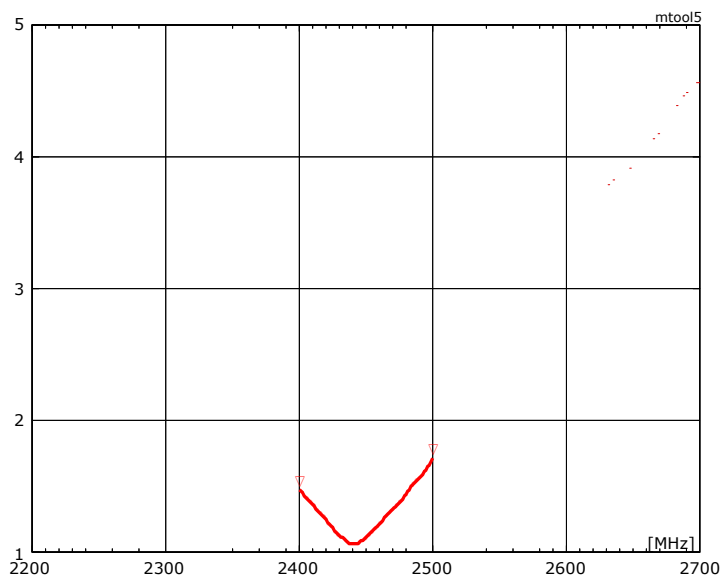


Impexa 2.4 GHz SMD Antenna
Part No. A6150


7-3 Antenna patterns

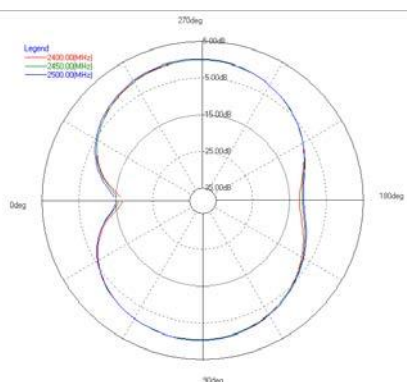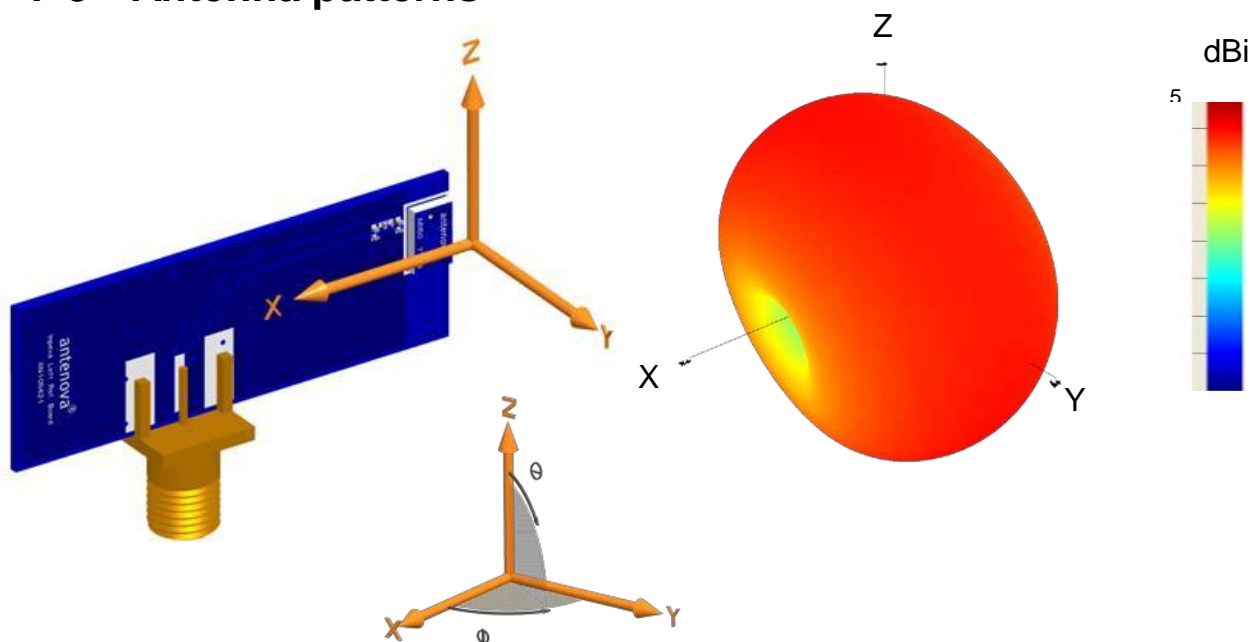

XY plane

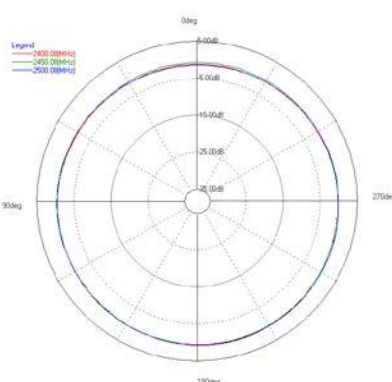

ZY plane

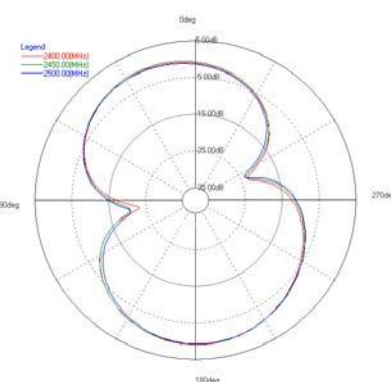

XZ plane


**Patterns show combined polarisations
measured on reference board A6150-U1**

Impexa 2.4 GHz SMD Antenna
Part No. A6150

8 Antenna dimensions

Impexa

YY=Year WW=Week No.

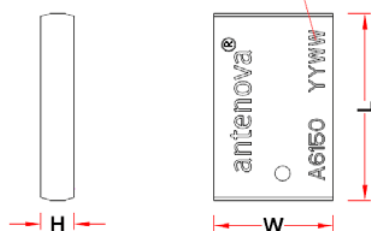


| L | W | H |
|---------------|---------------|---------------|
| Length | Width | Height |
| 6.1 ± 0.2 | 3.9 ± 0.2 | 1.1 ± 0.2 |

Dimensions in mm

9 Antenna footprint

Impexa (Part No: A6150)

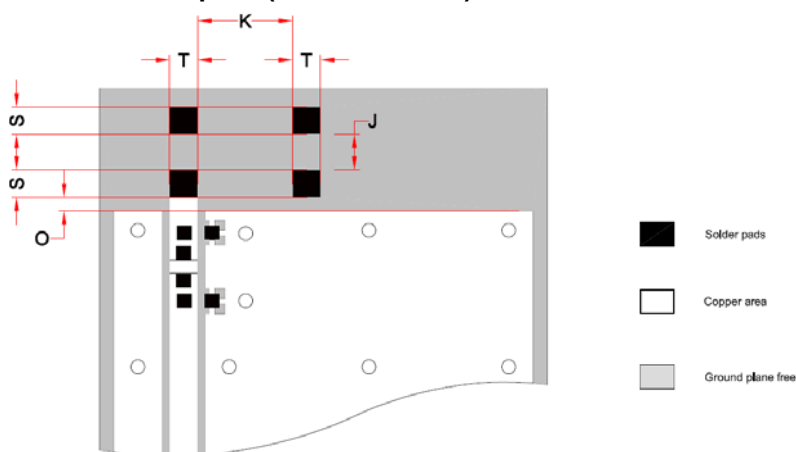

* CAD files of the antenna footprint are available to download from
www.antenna-m2m.com

| J | K | O | S | T |
|---------------|---------------|--------------------|-------------|-------------|
| 1.3 ± 0.1 | 3.4 ± 0.1 | $\geq 0.5 \pm 0.1$ | 1 ± 0.1 | 1 ± 0.1 |

Dimensions in mm

Dimension O stated is a minimum. Depending on the application, it can be increased to optimise the antenna performance. For more details, please contact sales@antenna-m2m.com

10 Electrical interface


10-1 Transmission lines

- All transmission lines should be designed to have a characteristic impedance of 50Ω
- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50Ω

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track so the characteristic impedance of the coplanar transmission line is 50Ω .

10-2 Matching circuit

The antenna requires a matching circuit that must be optimized for each customer's product. The matching circuit will require up to three components and the following pad layout should be designed into the device so the correct circuit can be installed.

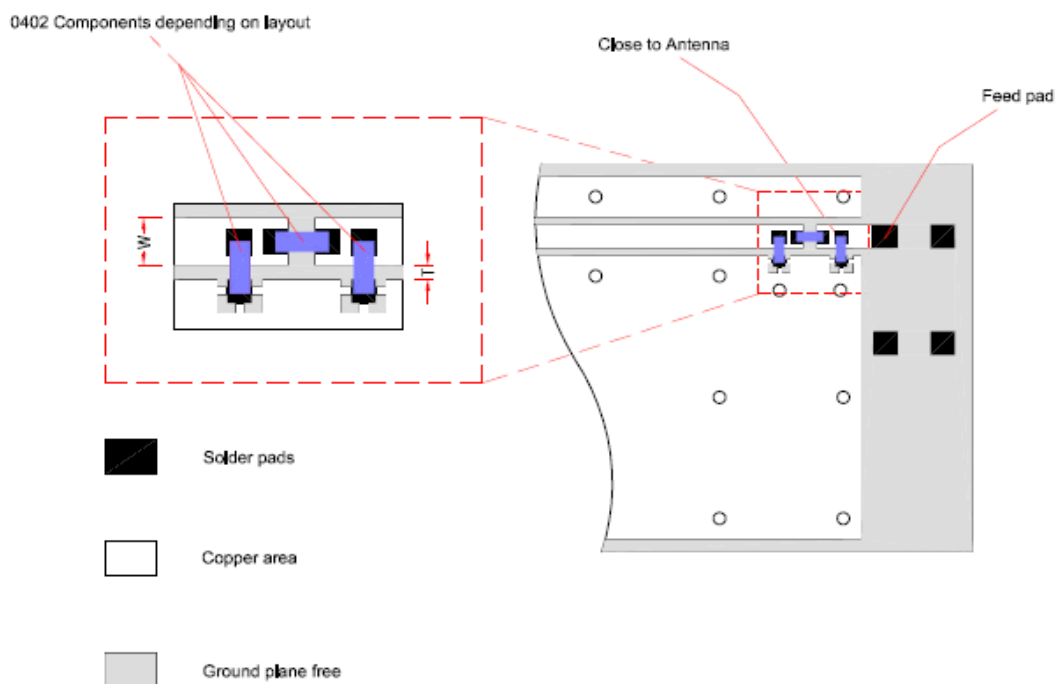

The antenna feed pad is indicated in the drawing above. Additional pads are for mechanical attachment only and should not be grounded.


Impexa 2.4 GHz SMD Antenna
Part No. A6150

In addition to the matching circuit, a separate DC blocking capacitor will also be required between the radio and the antenna matching circuit.

Note: The component values for the matching circuit will vary depending on the size of the PCB and surrounding components. The impedance of the antenna should be measured before selecting suitable matching components. Antenova M2M offers this service on request. Contact sales@antenova-m2m.com for further information.

10-3 Antenna placement

Antenova M2M strongly recommends placing the antenna near the edge of the board. Maximum antenna performance is achieved by placing the antenna towards one of the corners of the PCB.

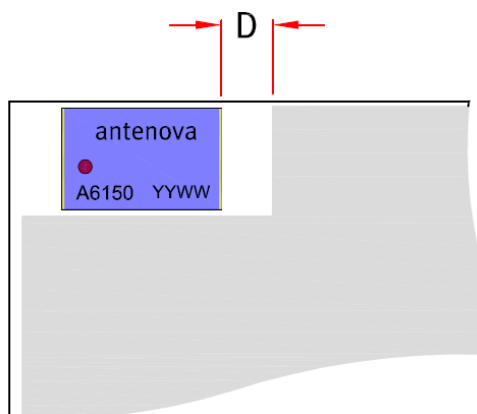


Additional ground and components near the antenna should be at a distance of at least 2 mm. Where possible the antenna should be clear of ground from both sides, although the antenna can work well with a minimum clearance of $D \geq 2 \text{ mm}$ as shown in the drawing above.

Impexa 2.4 GHz SMD Antenna
Part No. A6150

10-4 Reference boards

The reference boards have been designed for evaluation purposes of Impexa 2.4 GHz and they include a SMA female connector

Impexa
Part No. A6150-U1

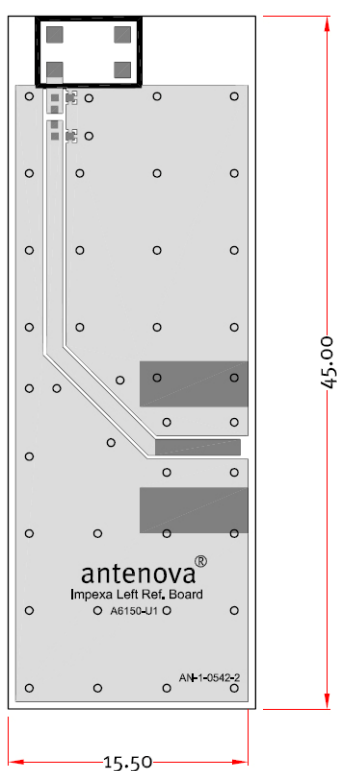

Dimensions in mm

To order a reference board contact sales@antenna-m2m.com.

11 Soldering

This antenna is suitable for lead free soldering.

The reflow profile should be adjusted to suit the device, oven and solder paste, while observing the following conditions:

- The maximum temperature should not exceed 240 °C
- However for lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

12 Hazardous material regulation conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenna M2M's website.

13 Packaging

13-1 Optimal storage conditions for packaged reels

| | |
|----------------------|---|
| Temperature | -10°C to 40°C |
| Humidity | Less than 75% RH |
| Shelf Life | 18 Months |
| Storage place | Away from corrosive gas and direct sunlight |
| Packaging | Reels should be stored in unopened sealed manufacturer's plastic packaging. |


Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in above table.

Impexa 2.4 GHz SMD Antenna
Part No. A6150

13-2 Tape characteristics

Impexa

[Part Number: A6150]

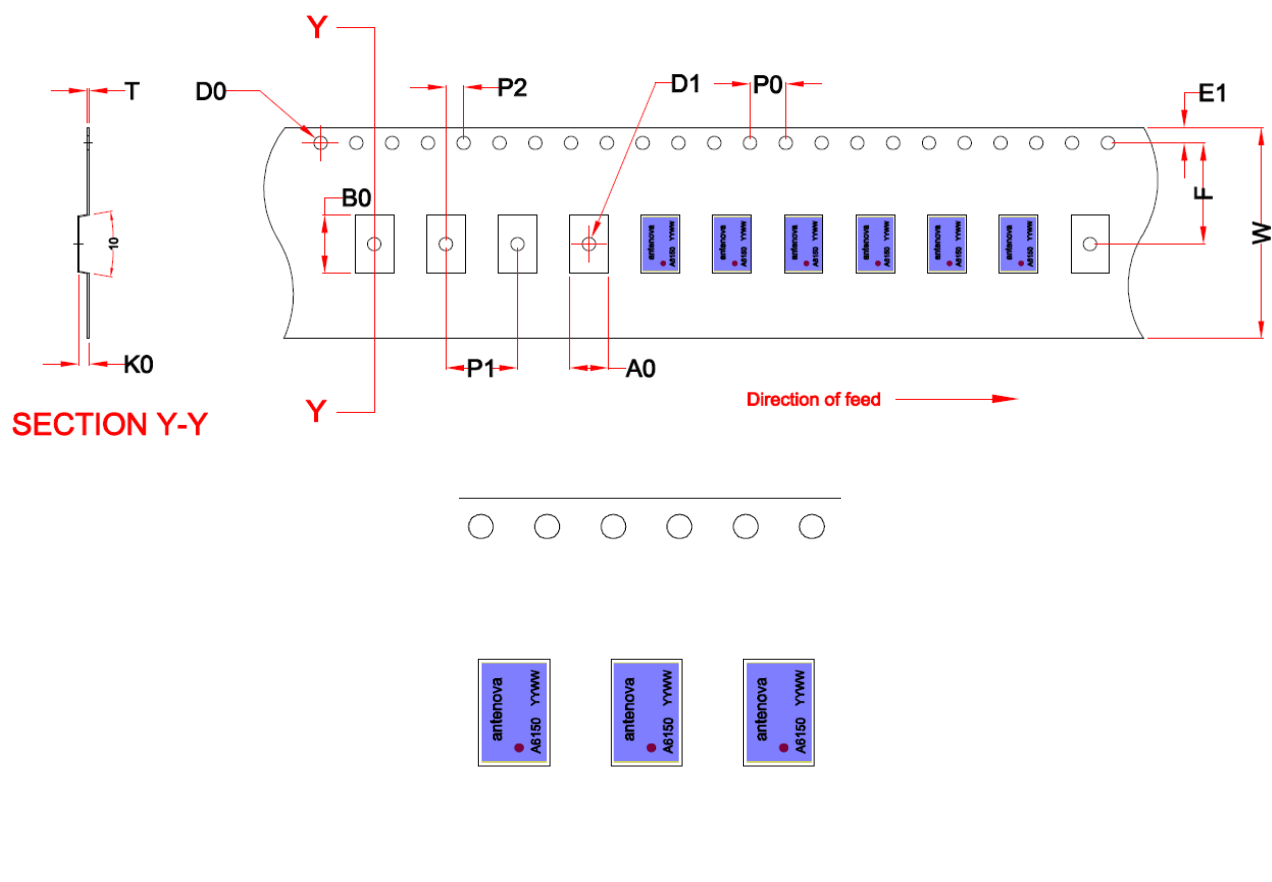


| W | F | E1 | P0 | P1 | P2 | A0 | B0 | K0 | T | D0 | D1 |
|----------|------------|------------|---------|---------|---------|-----------|-----------|-----------|------------|---------|---------|
| 24 ± 0.3 | 11.5 ± 0.1 | 1.75 ± 0.1 | 4 ± 0.1 | 8 ± 0.1 | 2 ± 0.1 | 4.3 ± 0.2 | 6.6 ± 0.2 | 1.5 ± 0.2 | 0.3 ± 0.05 | Min 1.5 | Min 1.5 |

Dimensions in mm

| Quantity | Leading Space | Trailing Space |
|-----------------|--------------------------|--------------------------|
| 1000 pcs / reel | 50 blank antenna holders | 37 blank antenna holders |


Impexa 2.4 GHz SMD Antenna
Part No. A6150

13-3 Reel dimensions

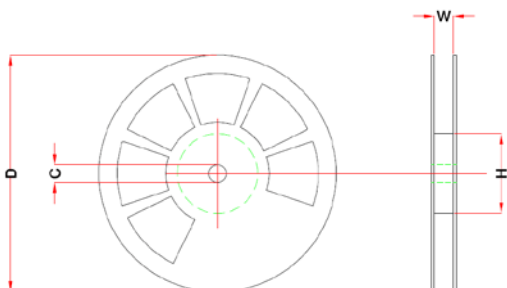

| Width | Reel Diameter | Hub Diameter | Shaft Diameter |
|-------|---------------|--------------|----------------|
| 24 mm | 180 mm (7") | 50 mm (2") | 13 mm |

13-4 Box dimensions

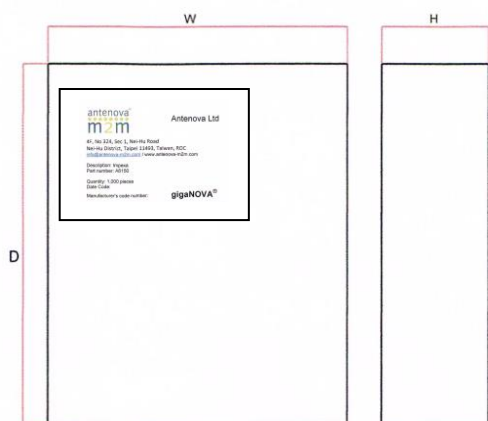

| Width W | Breadth B | Thickness H |
|---------|-----------|-------------|
| 195 mm | 195 mm | 37 mm |

13-5 Bag properties

Reels are supplied in protective plastic packaging

13-6 Reel label information

Impexa



Impexa 2.4 GHz SMD Antenna
Part No. A6150



www.antenova-m2m.com

Corporate Headquarters

Antenova Ltd.
2nd Floor, Titan Court
3 Bishop Square
Hatfield
AL10 9NA

North America Headquarters

Antenova Ltd.
100 Brush Creek Road, Suite 103
Santa Rosa
California, 95494
USA

Asia Headquarters

Antenova Asia Ltd.
4F, No. 324, Sec. 1, Nei-Hu Road
Nei-Hu District
Taipei 11493
Taiwan, ROC

Tel: +44 1223 810600

Email: sales@antenova-m2m.com

Tel: +1 707 890 5202

Email: sales@antenova-m2m.com

Tel: +886 (0) 2 8797 8630

Fax: +886 (0) 2 8797 6890

Email: sales@antenova-m2m.com

Copyright® Antenova Ltd. All Rights Reserved. Antenova®, Antenova M2M®, gigaNOVA®, the Antenova product family names, and the Antenova and Antenova M2M logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of print. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



Certificate No: 4598