

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Triad Magnetics](#)
[TLD1020-24-C0700](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



Switch Mode Power Supplies Encapsulated Constant Current

TLD1020-24-C0700

Description:

The TLD1020-24-C0700 is a compact and lightweight Constant Current Switch Mode Power Supply. Waterproof design within a 2x4 J box, IP66, NEMA 4 suitable for dry and damp locations. Convection cooled plastic housing. Designed for outdoor and indoor applications. Some typical applications include LED's, Lighting, etc.

Specifications (@25C)

Electrical Specifications:

| | |
|-------------------------------|---|
| Input Voltage: | 100-304Vac ¹ |
| Input Frequency Range: | 47-63Hz |
| Max Input Current: | 0.6A @ 115Vac; 0.3A @ 230Vac |
| Max Inrush Current: | <5A@115Vac, 10A@220Vac |
| Power Factor: | >0.9 at full load, 115Vac |
| Output: | .700A dc±5%, 12-24Vdc |
| Crest Factor (Ipk): | 1.5 Max. |
| Leakage Current: | 300µA Typical |
| Efficiency: | 84% Typical at full load |
| Maximum power: | 20W |
| Current Accuracy: | ±1% (when applicable) |
| Load Regulation: | ±3% |
| Hold up time: | Half cycle minimum at 120 VAC and 80% of rated voltage |
| Protection: | Over-voltage, Over current and Short circuit protection: Auto-recovery |

Environmental Specifications:

| | |
|-------------------------------|--|
| Operating Temperature: | -30 to 60°C (De-rating: 1%/°C from 60-70°C) |
| Storage Temperature: | -40 to 85°C |
| Operating Humidity: | 5 to 95% RH (non-Condensing) |
| Cooling: | Convection cooling |
| Vibration: | 5 to 50Hz |
| MTBF: | >100,000 Hours at full load and 25°C ambient conditions |
| EMC: | Compliant to 47CFR, Part 2, Part 15 and Cisp PUB, 22 Class B |

General Specifications:

| | |
|----------------------------|--|
| Connections: | 5in leads - Input: 18 AWG; Output: 18 AWG, Black (-), Grey (+) |
| Dimensions (WxLxH): | 40.0x95.0x25mm |
| Weight: | 120g |
| Warranty: | 3 years @ 40°C, 100% Load |


Safety Standards:

| | |
|-------------------|---------------------------|
| Standards: | UL (cUL) 1310, UL48 CE |
|-------------------|---------------------------|



RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

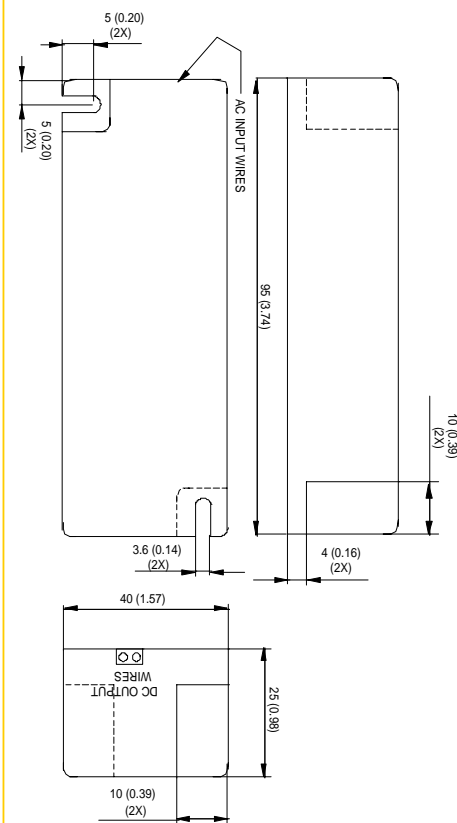

¹ Parts manufactured before November, 2010 have an input voltage range of 90 – 264VAC.