

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Triad Magnetics](#)

[TLM4036DC-1000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Switch Mode Power Supplies Encapsulated Constant Current

TLM4036DC-1000

Description:

The TLM4036DC-1000 is a compact and lightweight Constant Current Switch Mode Power Supply. Waterproof design - IP66, NEMA 4 suitable for dry and damp locations. Convection cooled plastic housing. Some typical applications include LED's, Lighting, etc.

Specifications (@25C)

Electrical Specifications:

Input Voltage:	See Table
Power Factor:	>0.9 at full load, 115Vac
Output*:	1.00A \pm 5%, Vout range: See Table
Efficiency:	90% Typical at full load
Maximum power:	26W
Output Current Regulation:	\pm 5%
Protection:	Short circuit protection: Auto-recovery *Subject to Max power limitations




Environmental Specifications:

Operating Temperature:	-40 to 60°C (De-rating: 1%/°C from 60-70°C)
Storage Temperature:	-40 to 80°C
Operating Humidity:	5 to 95% RH (non-Condensing)
Cooling:	Convection cooling
Vibration:	5 to 50Hz
MTBF:	>100,000 Hours at full load and 25°C ambient conditions

General Specifications:

Connections:	4in leads - Input: 18 AWG; Output: 18 AWG
Dimensions (WxLxH):	32.0x31.0x15.0mm
Weight:	25g
Warranty:	3 years @ 40°C, 100% Load

Performance Graphs:

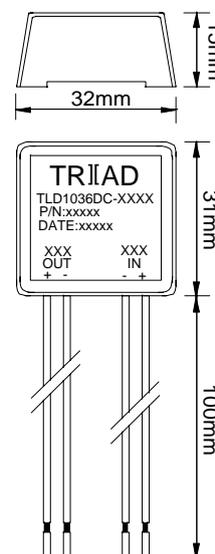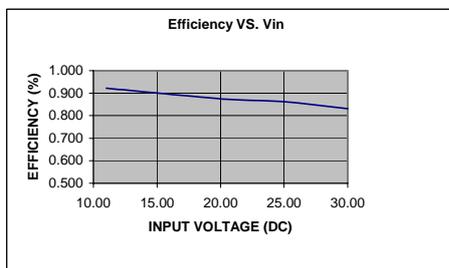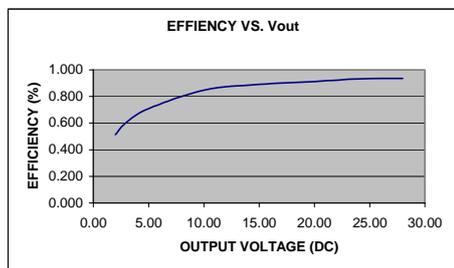

Vin (DC)	Vout (DC)	IDC (A)	Max Watts
30	2-26	1.0	26.0
28	2-24	1.0	24.0
24	2-20	1.0	22.0
15	2-12	1.0	13.0
12	2-10	1.0	10.0
10	2-8	1.0	9.0

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: December 4, 2013