

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated](#)
[ZXTP25015DFH](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



ZXTP25015DFH

15V, SOT23, PNP medium power transistor

Summary

$BV_{CEO} > -15V$

$BV_{ECO} > -3V$

$I_{C(cont)} = -4A$

$R_{CE(sat)} = 33m\Omega$

$V_{CE(sat)} < -55mV @ 1A$


$P_D = 1.25W$

Complementary part number ZXTN25015DFH



Description

Advanced process capability and package design have been used to maximize the power handling and performance of this small outline transistor. The compact size and ratings of this device make it ideally suited to applications where space is at a premium.




Features

- High power dissipation SOT23 package
- High peak current
- Low saturation voltage
- 15V forward blocking voltage
- 3V reverse blocking voltage

Applications

- MOSFET and IGBT gate driving
- DC - DC converters
- Motor drive
- High side driver
- Load disconnect switch



Pinout - top view

Ordering information

| Device | Reel size (inches) | Tape width (mm) | Quantity per reel |
|----------------|--------------------|-----------------|-------------------|
| ZXTP25015DFHTA | 7 | 8 | 3,000 |

Device marking

1A7

ZXTP25015DFH

Absolute maximum ratings

| Parameter | Symbol | Limit | Unit |
|----------------------------------------------------|----------------|------------|-------|
| Collector-base voltage | V_{CBO} | -15 | V |
| Collector-emitter voltage | V_{CEO} | -15 | V |
| Emitter-collector voltage (reverse blocking) | V_{ECO} | -3 | V |
| Emitter-base voltage | V_{EBO} | -7 | V |
| Continuous collector current ^(b) | I_C | -4 | A |
| Base current | I_B | -1 | A |
| Peak pulse current | I_{CM} | -10 | A |
| Power dissipation at $T_{amb} = 25^{\circ}C^{(a)}$ | P_D | 0.73 | W |
| Linear derating factor | | 5.84 | mW/°C |
| Power dissipation at $T_{amb} = 25^{\circ}C^{(b)}$ | P_D | 1.05 | W |
| Linear derating factor | | 8.4 | mW/°C |
| Power dissipation at $T_{amb} = 25^{\circ}C^{(c)}$ | P_D | 1.25 | W |
| Linear derating factor | | 9.6 | mW/°C |
| Power dissipation at $T_{amb} = 25^{\circ}C^{(d)}$ | P_D | 1.81 | W |
| Linear derating factor | | 14.5 | mW/°C |
| Operating and storage temperature range | T_j, T_{stg} | -55 to 150 | °C |

Thermal resistance





| Parameter | Symbol | Limit | Unit |
|------------------------------------|-----------------|-------|------|
| Junction to ambient ^(a) | $R_{\theta JA}$ | 171 | °C/W |
| Junction to ambient ^(b) | $R_{\theta JA}$ | 119 | °C/W |
| Junction to ambient ^(c) | $R_{\theta JA}$ | 100 | °C/W |
| Junction to ambient ^(d) | $R_{\theta JA}$ | 69 | °C/W |

NOTES:

- (a) For a device surface mounted on 15mm x 15mm x 1.6mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.
 (b) Mounted on 25mm x 25mm x 1.6mm FR4 PCB with a high coverage of single sided 2 oz copper in still air conditions.
 (c) Mounted on 50mm x 50mm x 1.6mm FR4 PCB with a high coverage of single sided 2 oz copper in still air conditions.
 (d) As (c) above measured at $t < 5$ secs.

ZXTP25015DFH

Characteristics

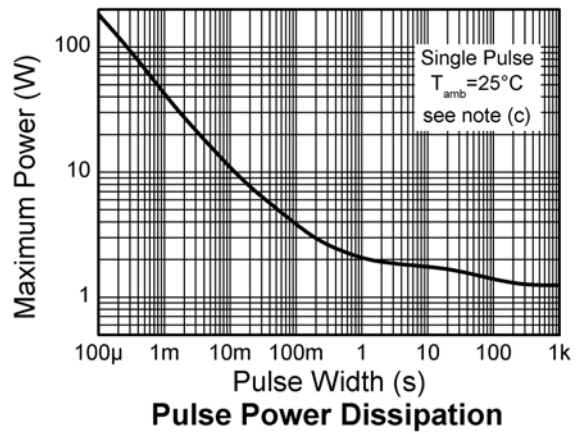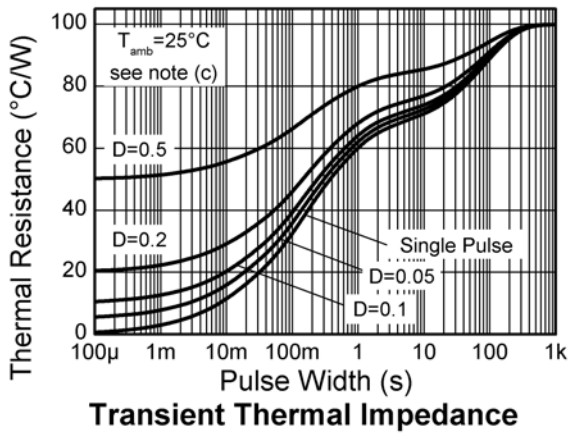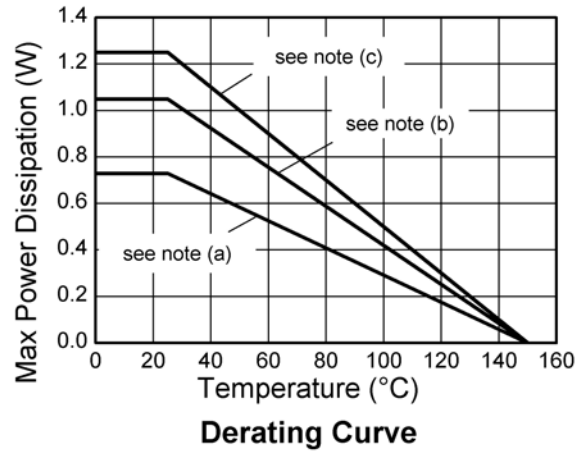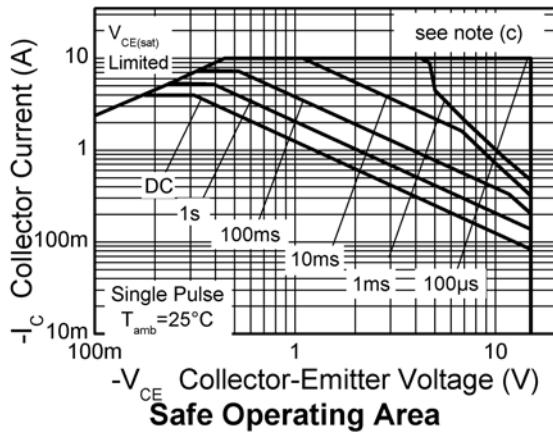

ZXTP25015DFH

Electrical characteristics (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated)






| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|-------------------------------------------------|---------------|------|------|------------|---------------------|---------------------------------------------------------------------------------------|
| Collector-base breakdown voltage | BV_{CBO} | -15 | -35 | | V | $I_C = -100\mu\text{A}$ |
| Collector-emitter breakdown voltage (base open) | BV_{CEO} | -15 | -30 | | V | $I_C = -10\text{mA}^{(*)}$ |
| Emitter-base breakdown voltage | BV_{EBO} | -7 | -8.4 | | V | $I_E = -100\mu\text{A}$ |
| Emitter-collector breakdown voltage (base open) | BV_{ECO} | -3 | -8.2 | | V | $I_E = -100\mu\text{A}^{(*)}$ |
| Collector-base cut-off current | I_{CBO} | | <-1 | -50 -20 | nA μA | $V_{CB} = -12\text{V}$ $V_{CB} = -12\text{V}, T_{amb} = 100^{\circ}\text{C}$ |
| Emitter-base cut-off current | I_{EBO} | | <-1 | -50 | nA | $V_{EB} = -5.6\text{V}$ |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | | -45 | -55 | mV | $I_C = -1\text{A}, I_B = -100\text{mA}^{(*)}$ |
| | | | -110 | -150 | mV | $I_C = -1\text{A}, I_B = -10\text{mA}^{(*)}$ |
| | | | -130 | -175 | mV | $I_C = -2\text{A}, I_B = -40\text{mA}^{(*)}$ |
| | | | -160 | -210 | mV | $I_C = -4\text{A}, I_B = -200\text{mA}^{(*)}$ |
| | | | -165 | -220 | mV | $I_C = -5\text{A}, I_B = -500\text{mA}^{(*)}$ |
| Base-emitter saturation voltage | $V_{BE(sat)}$ | | -930 | -1050 | mV | $I_C = -4\text{A}, I_B = -200\text{mA}^{(*)}$ |
| Base-emitter turn-on voltage | $V_{BE(on)}$ | | -810 | -900 | mV | $I_C = -4\text{A}, V_{CE} = -2\text{V}^{(*)}$ |
| Static forward current transfer ratio | h_{FE} | 300 | 450 | 900 | | $I_C = -10\text{mA}, V_{CE} = -2\text{V}^{(*)}$ |
| | | 200 | 315 | | | $I_C = -1\text{A}, V_{CE} = -2\text{V}^{(*)}$ |
| | | 90 | 145 | | | $I_C = -4\text{A}, V_{CE} = -2\text{V}^{(*)}$ |
| | | | 30 | | | $I_C = -10\text{A}, V_{CE} = -2\text{V}^{(*)}$ |
| Transition frequency | f_T | | 295 | | MHz | $I_C = -50\text{mA}, V_{CE} = -10\text{V}$ $f = 100\text{MHz}$ |
| Output capacitance | C_{OBO} | | 25 | 30 | pF | $V_{CB} = -10\text{V}, f = 1\text{MHz}^{(*)}$ |
| Delay time | t_d | | 33.8 | | ns | $V_{CC} = -15\text{V},$ $I_C = -750\text{mA},$ $I_{B1} = I_{B2} = -15\text{mA}$ |
| Rise time | t_r | | 43.5 | | ns | |
| Storage time | t_s | | 196 | | ns | |
| Fall time | t_f | | 51.7 | | ns | |

NOTES:

(*) Measured under pulsed conditions. Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.


ZXTP25015DFH

Typical characteristics

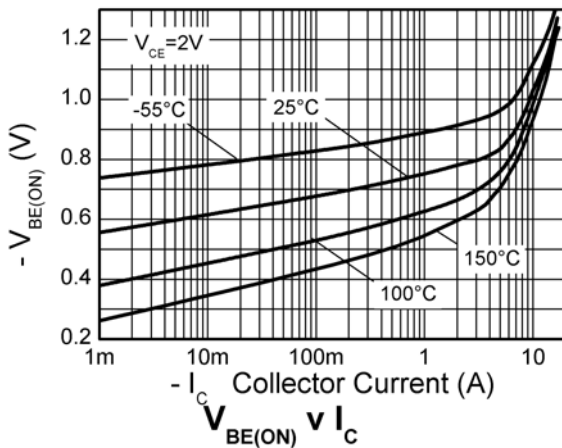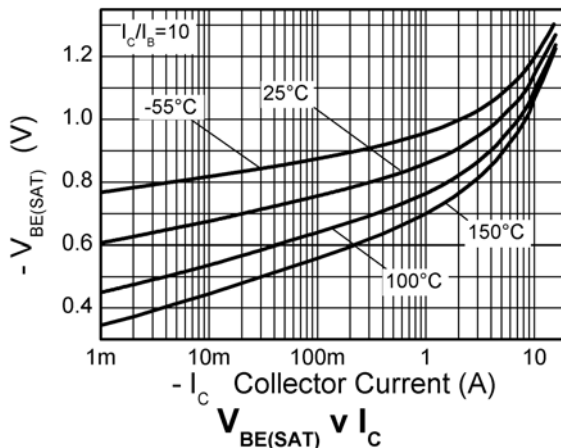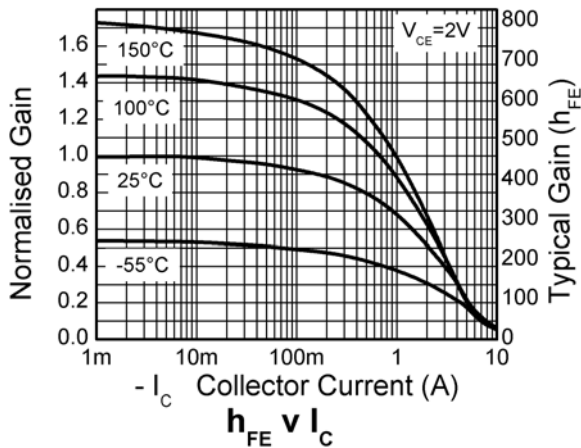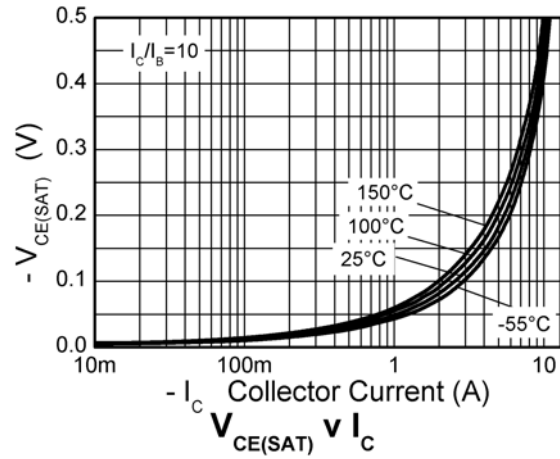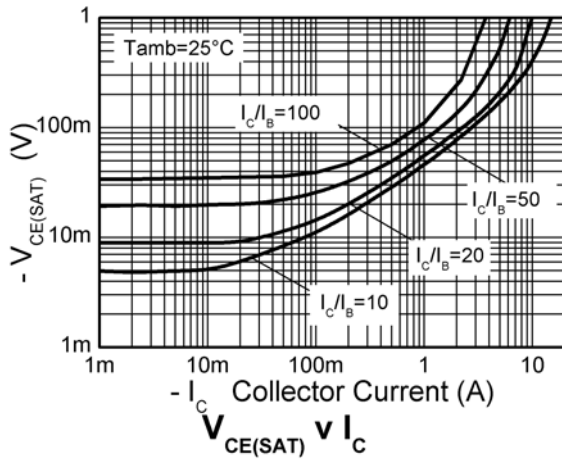

ZXTP25015DFH

Package outline - SOT23

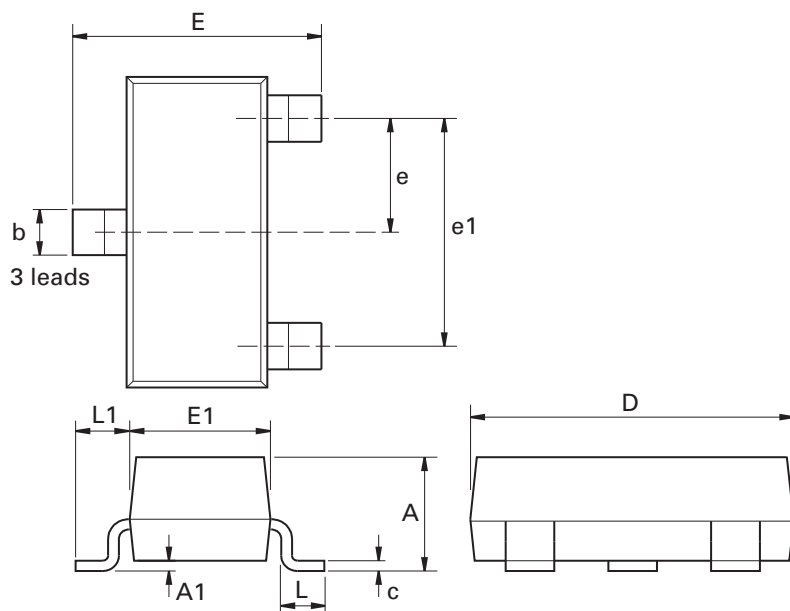

| Dim. | Millimeters | | Inches | | Dim. | Millimeters | | Inches | |
|------|-------------|------|-----------|-------|------|-------------|------|-----------|--------|
| | Min. | Max. | Min. | Max. | | Min. | Max. | Min. | Max. |
| A | - | 1.12 | - | 0.044 | e1 | 1.90 NOM | | 0.075 NOM | |
| A1 | 0.01 | 0.10 | 0.0004 | 0.004 | E | 2.10 | 2.64 | 0.083 | 0.104 |
| b | 0.30 | 0.50 | 0.012 | 0.020 | E1 | 1.20 | 1.40 | 0.047 | 0.055 |
| c | 0.085 | 0.20 | 0.003 | 0.008 | L | 0.25 | 0.60 | 0.0098 | 0.0236 |
| D | 2.80 | 3.04 | 0.110 | 0.120 | L1 | 0.45 | 0.62 | 0.018 | 0.024 |
| e | 0.95 NOM | | 0.037 NOM | | - | - | - | - | - |

Note: Controlling dimensions are in millimeters. Approximate dimensions are provided in inches

Europe

Zetex GmbH
 Kustermann-Park
 D-81541 München
 Germany

Telefon: (49) 89 45 49 49 0
 Fax: (49) 89 45 49 49 49
 europe.sales@zetex.com

Americas

Zetex Inc
 700 Veterans Memorial Highway
 Hauppauge, NY 11788
 USA

Telephone: (1) 631 360 2222
 Fax: (1) 631 360 8222
 usa.sales@zetex.com

Asia Pacific

Zetex (Asia Ltd)
 3701-04 Metroplaza Tower 1
 Hing Fong Road, Kwai Fong
 Hong Kong

Telephone: (852) 26100 611
 Fax: (852) 24250 494
 asia.sales@zetex.com

Corporate Headquarters

Zetex Semiconductors plc
 Zetex Technology Park, Chadderton
 Oldham, OL9 9LL
 United Kingdom

Telephone: (44) 161 622 4444
 Fax: (44) 161 622 4446
 hq@zetex.com

For international sales offices visit www.zetex.com/offices

Zetex products are distributed worldwide. For details, see www.zetex.com/salesnetwork

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contact or be regarded as a representation relating to the products or services concerned. The company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.