

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Desco](#)
[37750](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Meets ANSI/ESD S20.20 and Packaging standard ANSI/ESD S541

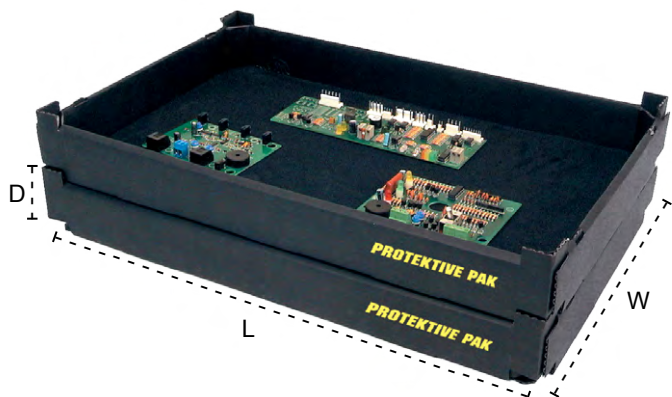

Features

- Trays that can stack and nest together for improved use of space
- Great container for Kanban
- Static dissipative foam bottom provides ESD and shock protection

Foam Electrical Properties: 1×10^5 to $< 1 \times 10^8$ ohms

Foam Thickness: 1/8"

Item No.	Size I.D. - L x W x D (IN)
37750	18 x 11-3/8 x 1-3/4
37751	22-7/8 x 17-1/4 x 2-3/4

SPECIFICATIONS

Properties

Surface Resistance

Sloughing Test

Recyclability

Typical Values

1×10^6 to $< 1 \times 10^9$ ohms

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Test Procedures/Method

ANSI/ESD STM11.11

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992



Unless otherwise noted, tolerance is $\pm 10\%$
Specifications and procedures subject to change without notice.

TEK-TRAYS

PROTEKTIVE PAK

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE CHINO, CA 91710
PHONE (909) 627-2578, FAX (909) 363-7331
ProtektivePak.com

DRAWING NUMBER
37750

DATE:
March
2015