

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic - BSG](#)
[P-240C/A14](#)


For any questions, you can email us directly:

sales@integrated-circuit.com



NICKEL CADMIUM BATTERIES: INDIVIDUAL DATA SHEET

P-240C C size (KR26/50) Type: N

Dimensions (with tube) (mm)

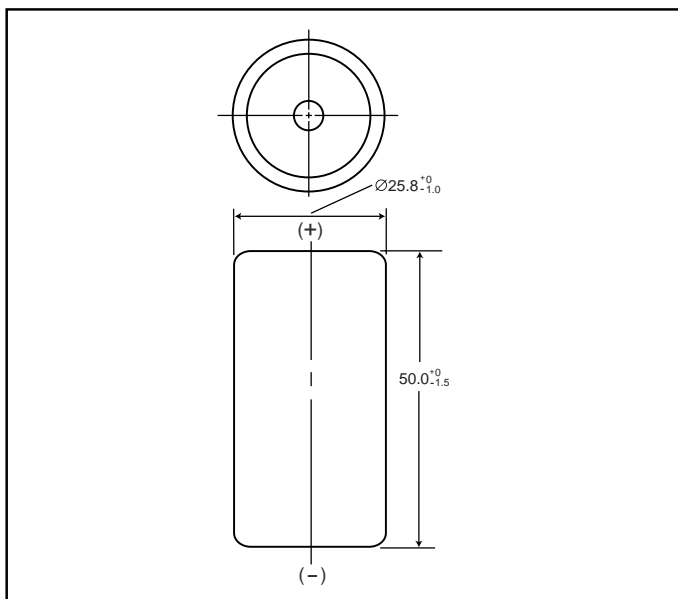


Typical Charge Characteristics

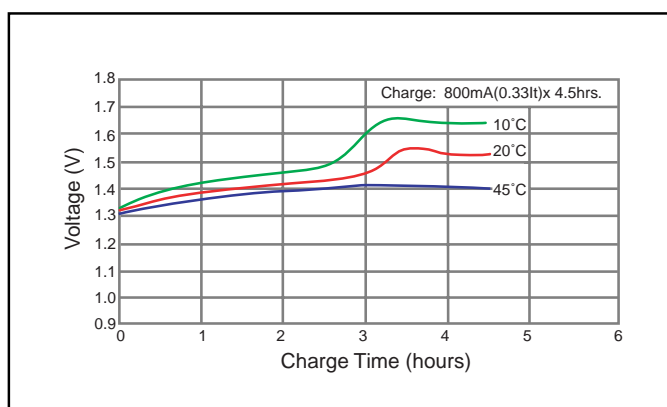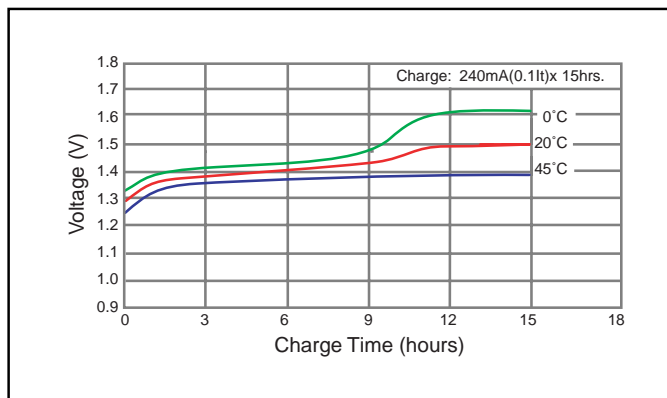

Specifications

	mm	inch
Diameter	25.8 +0/-1.0	1.02 +0/-0.04
Height	50.0 +0/-1.5	1.97 +0/-0.06
Approximate Weight	Grams	Ounces
	75g	2.65

Typical Discharge Characteristics

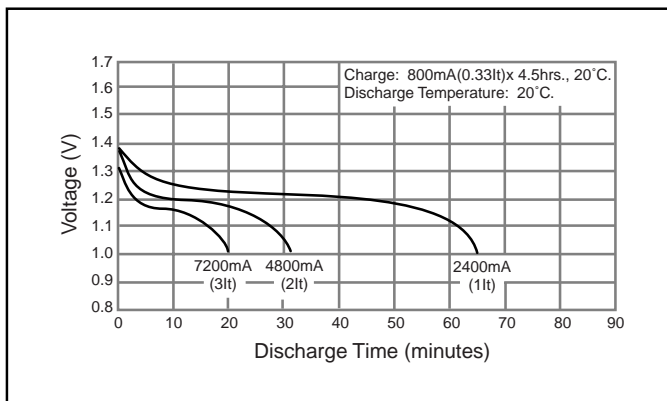

Nominal Voltage		1.2V		
Discharge Capacity*	Average**	2600mAh		
	Rated (Min.)	2400mAh		
Approx. Internal impedance at 1000Hz at charged state		5mΩ		
Charge	Standard	240mA (0.1It) x 16 hrs.		
	Short Time	800mA (0.33It) x 4.5 hrs.		
	Trickle	Max Current	120mA (0.05It) x 30h and over	
		Min Current	80mA (0.033It) x 45h and over	
Ambient Temperature	Charge	Standard	°C	°F
			0°C to 45°C	32°F to 113°F
	Short Time	10°C to 45°C	50°F to 113°F	
		Discharge		-20°C to 65°C
	Storage	< 2 years	-20°C to 35°C	-4°F to 95°F
< 6 months		-20°C to 45°C	-4°F to 113°F	

* 0.2It discharge capacity after charging at 0.1It for 16 hours.

** For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge / discharge specs, warning label contents and unit design.

Note: [It] was previously expressed as [C]. [It] is an IEC standard expression for the amount of charge or discharge current and is expressed as:
 $It(A) = Cn (Ah)/1h.$

- [It] is the reference test current in amperes
- [Cn] is the rated capacity of the cell or battery in Ampere-hours.
 $n = \text{the time base [hours] for which the rated capacity is declared}$