

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pomona Electronics](#)
[72905-0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Models 72905

Clip lead for Micro SMD Grabber



***Attach your Micro SMD
Grabber to Standard test
leads.***

Features

- **Clip lead for easy attachment of Micro SMD Grabbers Pomona 72902 and 72906 to standard test leads**
- **0.8mm female/4mm female**

Materials

- Connector Body is Nickel plated Brass.
- Connector insulation is Polypropylene
- 0.8mm Socket is Gold over Nickel plated Brass.
- Insulation of 0.8mm is Elastomere
- Wire is Silicone.

Ordering Information

Model: 72905-Color


Available colors: Black (-0), Red (-2)

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

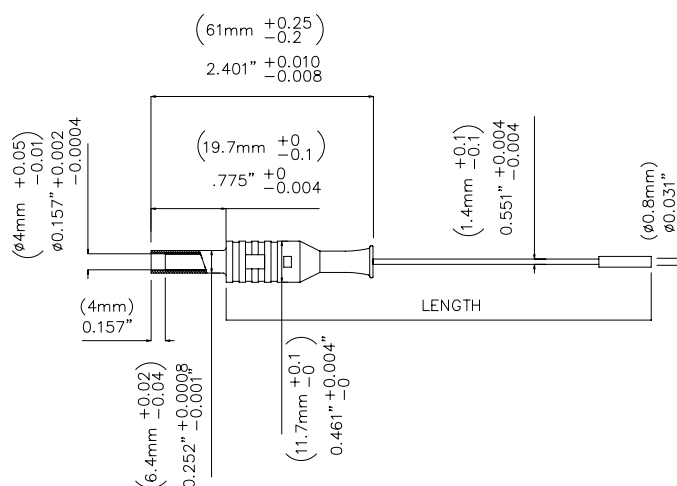

Specifications

Max Current	Max. 2A
Max Voltage	33 V AC / 70 V DC
Temperature Range	-20° C + 80° C
Max Resistance	Less than 8 mΩ

Rating: *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for hand-held use at voltages above 33Vrms/70Vdc

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.