

# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Pomona Electronics 72923-0

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>





## Technical Data Sheet

### Models 72923 SMD Test Probe W/ Sharp, Spring Mounted Tip, 2MM



#### **Features**

- SMD test probe with sharp, spring mounted tip and 2mm jack
- Provides ultra-fine control for probing high density SMD circuits
- Very fine 0.03in (0.7mm) diameter stainless steel tip is spring-mounted for controlled pressure
- Removable, clear IC insulator cap prevents shorting of adjacent IC loges.
- Sheathed 2mm receptacle adapts to 2mm test leads and adapters.

### **Materials**

Probe Body: Brass Probe Tip: Steel


Insulation: Polypropylene
 Can Insulation: Polypropylene

• Cap Insulation: Polypropylene

## **Ordering Information**

Model:72923-Color

Available colors: Black (-0), or Red (-2)

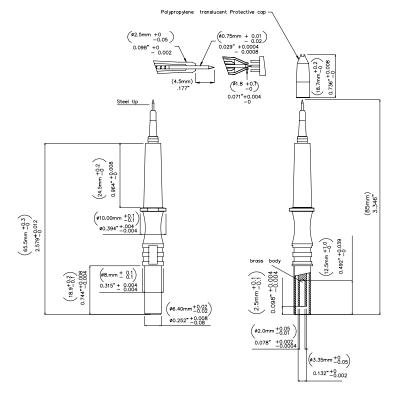

## **Specifications**

Max Current	Max. 1A
Max Voltage	600 V Cat III
Temperature	-20° C + 80° C
Max Resistance	Less than 5 mΩ

USA: Sales: 800-490-2361 Technical Support: 800-241-

2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International**: 425-446-5500

e-mail: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>
Where to Buy: <a href="mailto:www.pomonaelectronics.com">www.pomonaelectronics.com</a>

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2004 2/06 72923 Rev A Page 1 of 1