

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity Alcoswitch Switches  
436860-7](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

| LOC | DIST | P | F | ZONE | LTR | REVISIONS                                      | DATE   | APPD |
|-----|------|---|---|------|-----|------------------------------------------------|--------|------|
| AG  | 1    |   |   |      | G   | SUPERSEDED -3,-5,-6,-9 & 1--1 PER 0440-0120-96 | 7-2-97 | RT   |

- 5 TO 10 LBS REQUIRED TO PROGRAM EACH SHUNT POSITION.
- MOUNTING SURFACE WHEN INSERTED IN .040 DIA MOUNTING HOLES
- PIN NO. 1 IDENTIFICATION.
- PIN 1 IDENT, AMP, AND POSITION NUMBERS ARE RECESSED.

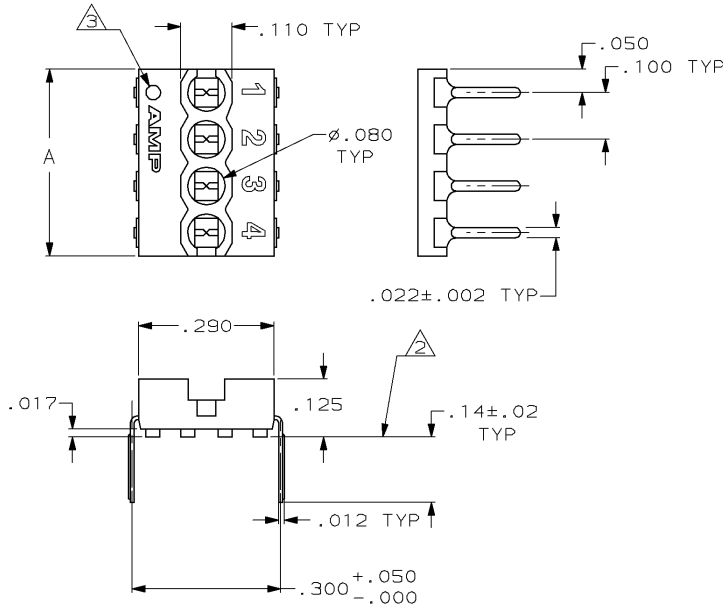

|                          |       |    |            |
|--------------------------|-------|----|------------|
| SUPERSEDED BY 1-435704-2 | 1.200 | 12 | 1-436860-1 |
| SUPERSEDED BY 1-435704-0 | 1.000 | 10 | 436860-9   |
|                          | .800  | 8  | 436860-7   |
| SUPERSEDED BY 435704-7   | .700  | 7  | 436860-6   |
| SUPERSEDED BY 435704-6   | .600  | 6  | 436860-5   |
| SUPERSEDED BY 435704-4   | .400  | 4  | 436860-3   |

|                                       |                  |                       |  |
|---------------------------------------|------------------|-----------------------|--|
| DO NOT SCALE PRINT. UNLESS SPECIFIED  | DR 13 OCT 1989   | AMP INCORPORATED      |  |
| DIMENSIONS                            | CHK 10-31-89     | Harrisburg, Pa. 17105 |  |
| TOLERANCES ON:                        | R.MILLER         |                       |  |
| 2 PLC DEC # -                         | APPD 10-31-89    |                       |  |
| 3 PLC DEC # .005                      | H.LEITER         |                       |  |
| ANGLES ± -                            | APPD -           |                       |  |
| MATERIAL                              | PRODUCT SPEC     |                       |  |
| HOUSING: GRAY THERMOPLASTIC           | APPLICATION SPEC |                       |  |
| CONTACT: COPPER ALLOY                 | WEIGHT -         |                       |  |
| FINISH                                |                  |                       |  |
| CONTACTS: .000100 MIN TIN OVER NICKEL |                  |                       |  |

SHUNT, DIP, PROGRAMMABLE  
MACHINE INSERTABLE

SIZE B CABE CODE 00779 DRAWING NO 436860  
 SCALE 5:1 SHEET 1 OF 1

CUSTOMER DRAWING