

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0887329400](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DWG. NO. SD-88732-9*00

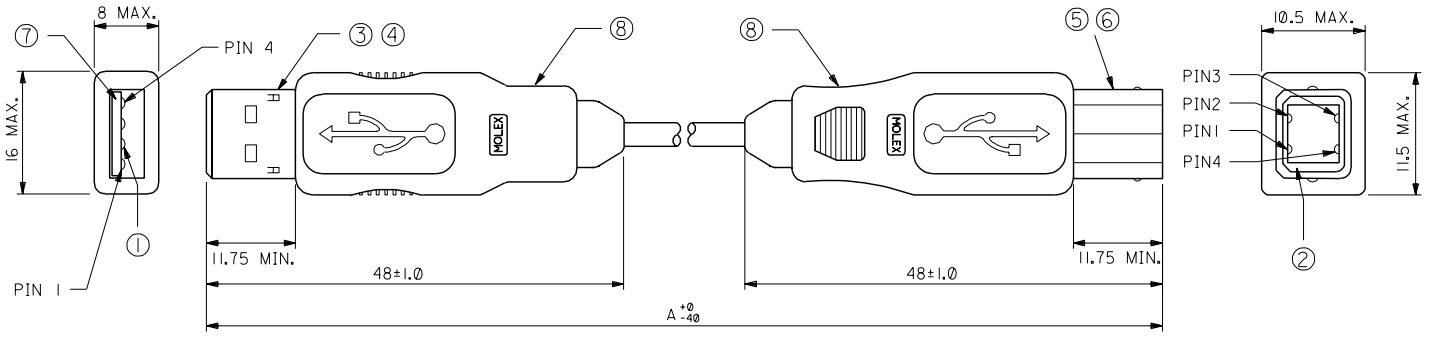

BRAID/DRAIN	AWG#20	AWG#28	AWG#28	AWG#20	5.0	5010	88732-9400	4
	AWG#22	AWG#28	AWG#28	AWG#22	5.0	3340	88732-9300	
	AWG#24	AWG#28	AWG#28	AWG#24	4.7	2090	88732-9200	
	AWG#26	AWG#28	AWG#28	AWG#26	4.2	1320	88732-9100	
	AWG#28	AWG#28	AWG#28	AWG#28	4.2	820	88732-9000	
DRAIN WIRE	BLACK	GREEN	WHITE	RED	ケーブル外径 FINISH DIAMETER	A	製品番号 MATERIAL NO.	種数 CIRCUITS


DO NOT SCALE DRAWING		EC NO. DRWN: CHK: APPR:		EC NO. DRWN: CHK: APPR:		EC NO. DRWN: CHK: APPR:		EC NO. DRWN: CHK: APPR:		EC NO. DRWN: CHK: APPR:		RELEASED EC NO. JD2000-0857 DRWN: YUKOJIMA 000/02/17 CHK: MASAO 000/02/17 APPR: HIKESUGI 000/02/17		MATERIAL 材料 SEE SHEET 2		GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		SCALE 2-1		DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH		THIRD ANGLE PROJECTION <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY		TITLE: USB A-B I/O CABLE		SHT REV	
												FINISH 仕上げ SEE SHEET 2		10 UNDER 未満 ±0.2 10 OVER 以上 30 UNDER 未満 ±0.25 30 OVER 以上 ±0.3		DRAWN BY & DATE Y. Kojima 2000/02/17		CHECKED BY & DATE H. Sano 2000/02/17		APPROVED BY & DATE H. Sano 2000/02/17		MOLEX INCORPORATED		REVISE ON CAD ONLY			
												WIRE RANGE 適用電線範囲 SEE CHART		ANGLE 角度 ±3°		CAD FILENAME 887329*00.S01		MATERIAL NO. SEE CHART		DRAWING NO. SD-88732-9*00		SHEET NO. 1 OF 2					
												JNS. RANGE 接続外径 SEE CHART				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE B		EN-02J(097) MXJ-54							

887329*00.S01.DGN

DWG. NO. SD-88732-9*00

注記)
NOTES.

1. ケーブル構造
CABLE CONSTITUTION



WIRE COLOR (SIGNAL NAME)	接点 CONTACT NUMBER	
	USB-A	USB-B
RED (V)	#1	#1
WHITE (-DATA)	#2	#2
GREEN (+DATA)	#3	#3
BLACK (GND)	#4	#4
DRAIN WIRE	SHEEL	SHEEL

2. 部品構成
PART CONSTRUCTION

部品名 PARTS NAME	材質 MATERIALS	処理 FINISH
① TERMINAL	銅合金 COPPER ALLOY	接点部 : 金メッキ + パラジウムニッケル CONTACT AREA : GOLD + PALLADIUM-NICKEL
② HOUSING	GLASS FILLED HEAT RESISTANT PLASTIC + GOLD FLASH COLOR : WHITE	— # —
③ USB-A FRONT SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
④ USB-A REAR SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
⑤ USB-B FRONT SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
⑥ USB-B REAR SHELL	鋼 STEEL	下地 : 銅めっき、光沢 半田めっき UNDER PLATING : COPPER, LIGHT TIN PLATING
⑦ CRIMP HOUSING	GLASS FILLED HEAT RESISTANT PLASTIC + GOLD FLASH COLOR : WHITE	— # —
⑧ OVER MOLD HOUSING	POLYVINYL CHLORIDE COLOR : FROST WHITE	— # —

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR: EC NO. DRWN: CHK: APPR: EC NO. DRWN: CHK: APPR: EC NO. DRWN: CHK: APPR:	EC NO. J022000-0857 DRWN: YUKOJIMA '00/02/17 CHK: M.SASAO '00/02/17 APPR: H.KESUGI '00/02/17	MATERIAL 材料 部品構成表参照 SEE PART CONSTRUCTION FINISH 仕上げ 部品構成表参照 SEE PART CONSTRUCTION WIRE RANGE 適用電線範囲 — # — INS. RANGE 適用外径 — # —	GENERAL TOLERANCES: (UNLESS SPECIFIED) — 公差 — 10 UNDER 未満 ±0.2 10 OVER 以上 30 未満 ±0.25 30 OVER 以上 ±0.3 ANGLE 角度 ±3°	SCALE 2-1 DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH DRAWN BY & DATE <i>S. Kajima</i> '00/02/17 CHECKED BY & DATE <i>H. Sano</i> '00/02/17 APPROVED BY & DATE <i>H. Sano</i> '00/02/17 CAD FILENAME 887329*00.S02	THIRD ANGLE PROJECTION DIMENSIONS: <input type="checkbox"/> INCH <input type="checkbox"/> mm <input type="checkbox"/> mm ONLY TITLE: USB A-B I/O CABLE MOLEX INCORPORATED MATERIAL NO. SEE CHART DRAWING NO. SD-88732-9*00 SHEET NO. 2 OF 2	SHT REV REVISE ON CAD ONLY
--	---	---	--	--	--	-------------------------------

887329*00.S02.DGN