

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0009652058](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

10 9 8 7 6 5 4 3 2 1

注記
NOTES△全極数が偶数の場合のみ適用。
TO BE APPLIED ONLY WHEN ALLCKTS ARE EVEN.

2.材質


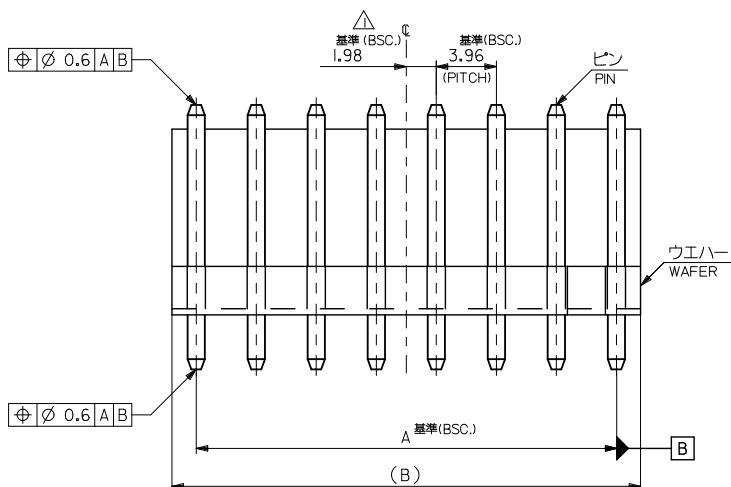
MATERIAL

ウエハー: 66ナイロン, UL94V-2

WAHER: 66NYLON, UL-94V-2

ピン: 黄銅, 銅下地鍍メッキ (1.14X17.45)

PIN: BRASS, TIN OVER COPPER PLATING (1.14X17.45)

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.

46.76	43.56	09-65-2128	5273-12A	12
42.8	39.6	-2118	-11A	11
38.84	35.64	-2108	-10A	10
34.88	31.68	-2098	-09A	9
30.92	27.72	-2088	-08A	8
26.96	23.76	-2078	-07A	7
23	19.8	-2068	-06A	6
19.04	15.84	-2058	-05A	5
15.08	11.88	-2048	-04A	4
11.12	7.92	-2038	-03A	3
7.16	3.96	09-65-2028	5273-02A	2

REVISED	EC NO. J2009-2884	DRAWN BY SHIBATA 2009/06/23	CHKD: HARUYAMA 2010/03/15	APPR: NIKITA 2010/03/15	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	TITLE	MOLEX INCORPORATED	DOCUMENT NO.	SHEET NO.
						10 UNDER	± 0.2	MM ONLY	DATE							
						10 OVER	± 0.25		1989/05/12				KK 3.96 WAFER ASSY WITH LOCK	SD-5273-001	1 OF 1	EN-02JA(021)
						30 OVER	± 0.3		1991/04/10							
						ANGULAR	± 3 °		1991/04/10				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
						DRAFT WHERE APPLICABLE	MUST REMAIN WITHIN DIMENSIONS		1991/04/10							