

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol Commercial Products](#)
[L177RRD50S](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

The document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent. All the right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			07/24/08	


D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0 Color Black
 ELECTRICAL : Voltage rating : 500 V RMS at 50 Hz
 Insulation resistance >5000 M Ohms
 CLIMATIC : Temperature range -55 °C up to 125°C
 MARKING : Amphenol---(Series No.)
 Commercial reference
 Manufacturing date

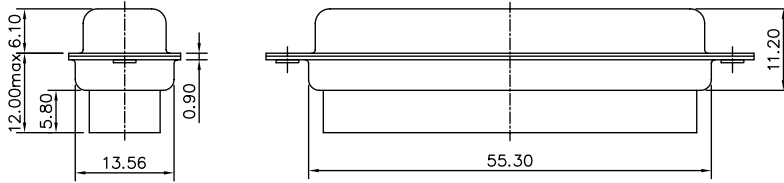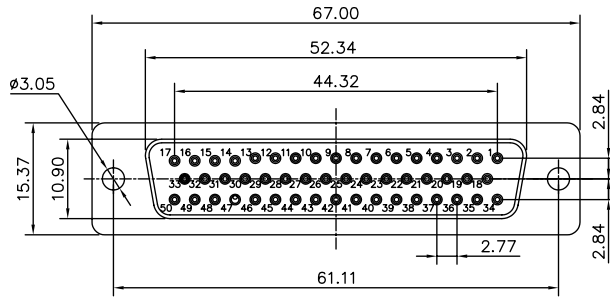

PRODUCT CODE

L 177RR D 50 S

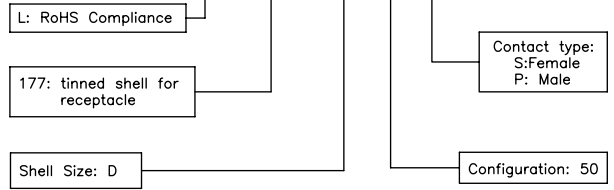

Customer drawing

UNLESS OTHERWISE SPECIFIED		APPROVAL	DATE
TOLERANCES		DRAWN	07/24/08
U.S.	METRIC	CHECKED	HL wang 07/24/08
X +/-	0.50	CHECKED	
XX +/-	0.30		
XXX +/-	0.20		
FRACTIONS			
ANGLES +/-	5°		
FOR MATERIALS AND FINISHES		DRAWING FILE :	
REMOVE SHARP EDGES		ANGLE OF PROJECTION	
DIMENSIONS			
U.S.	INCHES		
METRIC	MM		

Amphenol®		
TITLE		
stamped and formed connector, RR series		
SIZE	DRAWING NO.	REV.
A4	C L177RRD50S	1
SCALE	NONE	SHEET 1 OF 1