

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Soberton, Inc.](#)
[WT-1606](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Product Data Sheet
Part No. WT-1606 Washable Type

DIMENSIONS

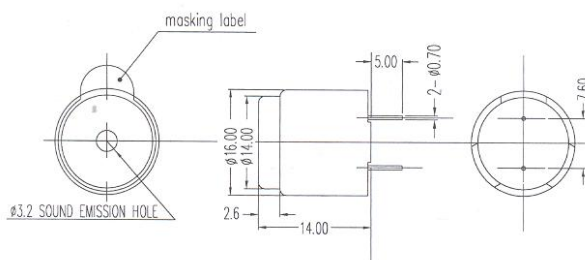


φ 16 × H14

UNIT : mm
 TOLERANCE : ±0.3
 HOUSING MATERIAL : PBT

Type	Unit	
Color		Black
Rated Voltage	(V)	6
Operating Voltage	(V)	4-8
Current Consumption	(mA)	MAX.40
Coil Resistance	(Ω)	50±5
Sound Output (Min)	(dB)	85
Resonance Frequency	(Hz)	2048±200
Operating Temp	(C)	-20~+60
Storage Temp	(C)	-30~+70
Weight	(g)	7
Terminal		PIN TYPE
Dimension	mm	16 x H14

*applied voltage: Rated Voltage, 1/2 duty, square wave
 *distance for measurement 10cm

FREQUENCY RESPONSE

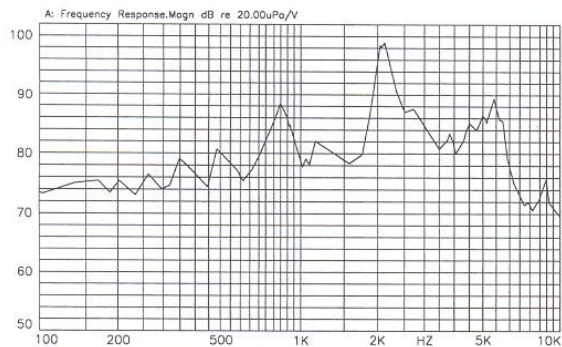

Frequency number B1
 Mode: SSR