

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Soberton, Inc.](#)
[PT-1625](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

Product Data Sheet
Part No. PT-1625 Reflow Type (SMD)

DIMENSIONS

PT-1625

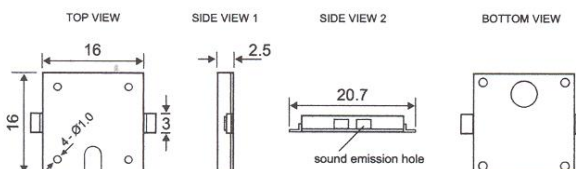

16.0 × 16.0 × 2.5

All dimensions are in mm

Type	Unit	PT-1625
Color		Black
Rated Voltage	(V)	3
Operating Voltage	(V)	1~25
Current Consumption	(mA)	< or = 1
Capacitance at 120 Hz	(pF)	14000±30%
Sound Output (Min)	(dB)	> or = 75
Resonant Frequency	(Hz)	4000±500
Operating Temp	(C)	-20~+70
Storage Temp	(C)	-30~+80
Weight	(g)	1
Dimension	mm	16 x 16 x 2.5

*Value applying at rated voltage
 *distance for measurement 10cm

FREQUENCY RESPONSE

