

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Conec](#)
[301A10479X](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

used for:

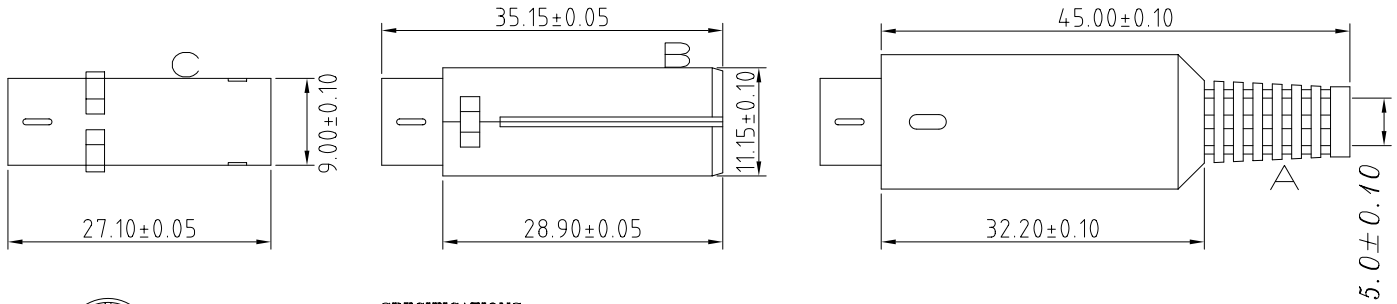

SPECIFICATIONS:

1. RATING: 11V AC 1A MAX
OR 12V DC 2A MAX.
2. INSULATION RESISTANCE:
50M OHM MIN AT 500V DC.
3. DIELECTRIC STRENGTH:
500V AC / 1 MINUTE.

MATERIAL:

- A. COVER: PE+2L
- B. SHELL: ABS
- C. METAL SHIELD: BRASS NICKEL PLATED
- D. HOUSING: NYLON66+GF
- E. CONTACT: BRASS SILVER PLATED



	6.0ø	BACK SHELL
	5.5ø	BACK SHELL
	5.0ø	BACK SHELL (STANDARD)
	4.8ø	BACK SHELL
		COVER DIM.

THE DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT THE WRITTEN PERMISSION OF CONEC CORPORATION. DO NOT ALTER CAD DRAWING BY HAND	tolerance		finish		scale:	
	unless otherwise specified tolerance shall be as follow				material: SEE MATERIALS	
	Decimal:	±.00	2006:	date	title:	
	Angles:		draw:	Aug 22	Mini Din Plug	
			appd:	Aug 22	RoHS compliant	
			norm	drawing no.:		
			d-old	AutoCAD 2005		
				DIN A3		
				sheet 1/1		
				drawing no.:		
				39K1A263		
				part no.:		
				301A10479X		

