

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[JAE Electronics](#)

[JB5HS08FN11](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

10K-66E91-50ds
 (ON DN)MYHQ)各管理回

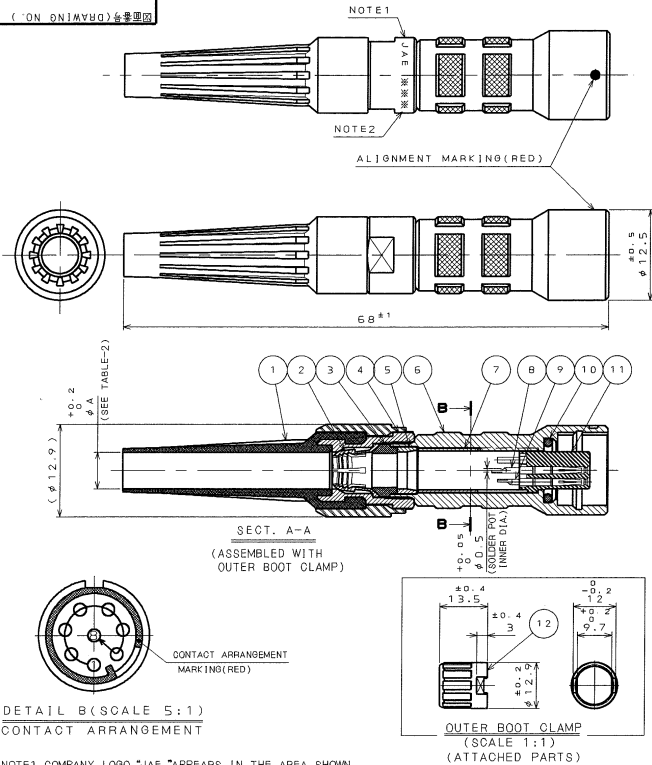

REV.	DATE	DCW NO.	変更内容	製図	担当	承認	承認

DESIGNATION							
JB5HS08FN11							
APPLICABLE CABLE O.D. (SEE TABLE-2)							
適合ケーブル外径 (TABLE-2)							
BOOT COLOR (SEE TABLE-1)							
ブーツ色相 (TABLE-1)							
CONTACT SIZE (N: #26)							
コネクタサイズ (N: #26)							
TERMINATION (F: SOLDER TYPE/SOCKET)							
終端方法 (F: 半田付け/ソケット)							
NUMBER OF CONTACTS (8 CONTACTS)							
芯数 (8芯)							
SHELL SIZE							
シェルサイズ							
MOUNTING CONFIGURATION							
(H: STRAIGHT RECEPTACLE PLUG)							
挿入形状 (H: ストレートレセプタクルプラグ)							
SERIES							
シリーズ							

SPECIFICATION		仕様	
NUMBER OF CONTACT	: 8	芯数	: 8芯
RATED VOLTAGE	: 200VAC	定格電圧	: 200VAC
RATED CURRENT	: 2A MAX per CONTACT	定格電流	: 2A以下/1芯
DIELECTRIC WITHSTANDING VOLTAGE	: 750VAC (INITIAL)	耐電圧	: 750VAC (初期値)
INSULATION RESISTANCE	: 1000MΩ MIN (AT 500VDC, INITIAL)	絶縁抵抗	: 1000MΩ以上 (500VDCにて、初期値)
APPLICABLE WIRE	: AWG#28 MAX	適用電線	: AWG#28 以下
WATERPROOF	: IP68 (MATED)	防水性能	: IP68 (嵌合時)

12	OUTER BOOT CLAMP	1	SYNTHETIC RESIN	ATTACHED PARTS
11	INSULATOR	1	SYNTHETIC RESIN	
10	"O" RING	1	SYNTHETIC RUBBER	
9	SOCKET CONTACT-1	7	COPPER ALLOY	GOLD PLATING OVER NICKEL Au: 0.76μm MIN
8	SOCKET CONTACT-2	1	COPPER ALLOY	GOLD PLATING OVER NICKEL Au: 0.76μm MIN
7	SPACER	1	COPPER ALLOY	NICKEL PLATING
6	SHELL	1	ZINC ALLOY	CHROMIUM PLATING
5	SHIELD SLEEVE	1	COPPER ALLOY	NICKEL PLATING
4	BUSHING	1	SYNTHETIC RUBBER	
3	GRAND NUT	1	COPPER ALLOY	CHROMIUM PLATING
2	CLAMP	1	COPPER ALLOY	NICKEL PLATING
1	BOOT	1	ELASTOMER	

NOTE1. COMPANY LOGO "JAE" APPEARS IN THE AREA SHOWN.
 2. PRODUCTION LOT NUMBER ARE MARKED AS INDICATED.
 ※※※ MANUFACTURER MONTH (1~9, X, Y, Z)
 (JAN~SEP, OCT, NOV, DEC)
 ※※※ MANUFACTURER YEAR ('03, '04, '05, ...)
 注1. 図示の位置に社名を表示する。【JAE】
 2. 図示の位置に製造ロットNo. を表示する。
 ※※※ 製造月 (1~9月, X: 10月, Y: 11月, Z: 12月)
 ※※※ 製造年 ('03, '04, '05, ...)

TABLE-1

NO.	COLOR
1	BLACK
2	BLUE
3	RED
4	YELLOW

TABLE-2

NO.	APPLICABLE CABLE O.D.	φA
0	NONE	
1	φ4.5~φ5.0	φ5.1

仕様書 (SPECIFICATION)	数量 (QTY.)	材料 (MATERIAL)	仕上 (FINISH)	備考 (REMARKS)
JACS-50001	8.AUG.2005		2:1 JB5	
一般公差 (GENERAL TOLERANCE)		P.NISHIOKA T. OKAMURA	名称 (TITLE)	日本航空電子工業株式会社
寸法 (DIMENSION)			JB5HS08FN**	JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
角度 (ANGLES)			(STRAIGHT RELAY RECEPTACLE PLUG)	図面番号 (DRAWING NO.)
公差 (TOLERANCE)				SP05-16399-K01
質量 (MASS)				版数 (REV.)