

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Switchcraft Inc.](#)
[TRA3M](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

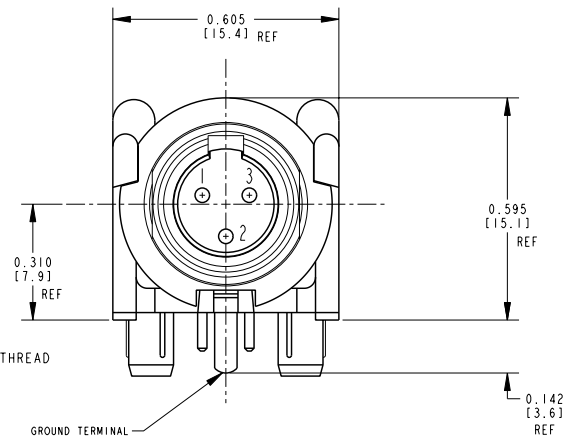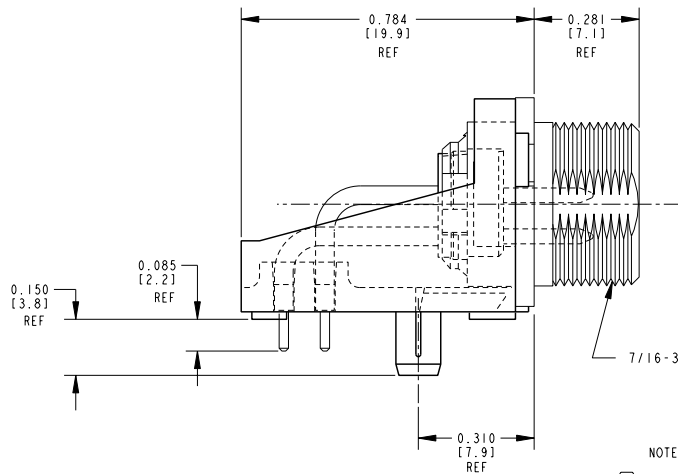

NOTES:

- ⑥ 1. MATERIALS:
HOUSING: THERMOPLASTIC
CONTACTS: BRASS; TIN PLATED (TRA3M), GOLD PLATED (TRA3MAU)
HARDWARE: BRASS, NICKEL PLATED
BUSHING: ZINC DIE CAST, NICKEL PLATED
- ⑥ 2. ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 5 A
CONTACT RESISTANCE: 0.010 OHM MAX
INSULATION RESISTANCE: 100 MEGA OHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC
MECHANICAL LIFE: 2000 CYCLES
- ⑥ 3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

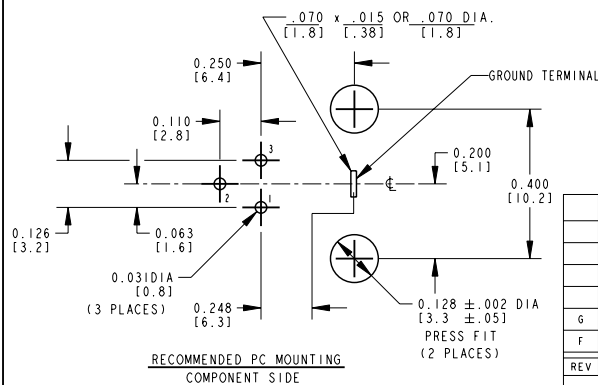

RECOMMENDED PC MOUNTING
COMPONENT SIDE

★ STAR SYMBOL DENOTES CRITICAL DIMENSION					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
UNLESS OTHERWISE SPECIFIED					SIZE	WIDTH	MULT	LBS/M	TEMPER
1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - ANGLES ±1° - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.					FINISH	MATERIAL			
2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002					SPEC No.	SPEC No.			
3. REMOVE ALL BURRS					FIRST USED ON	SCALE			
					DATE DRAWN	BY	CHKD	APVD	
					7-6-92	MW	MW	GHJ	
							8-27-92	8-27-92	
					NAME	TINI OG CONNECTOR			
						RA PC 3 PIN MALE, RoHS			
DO NOT SCALE DRAWING					PART No.			TRA3M SERIES	REV G

Pro/Engineer CAD File

8