

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[PB1973CBLKRILEF1](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SHEET 1 OF 1




RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.6





SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OFF	1-2





SPST

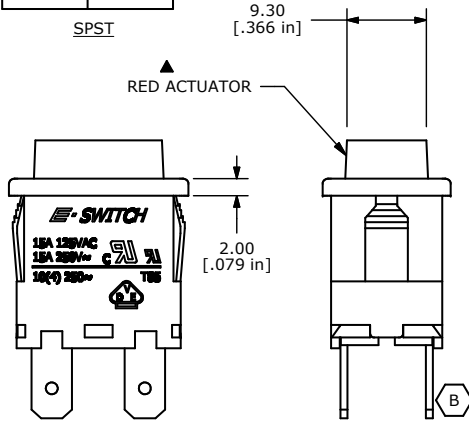

BLACK HOUSING



RED ACTUATOR

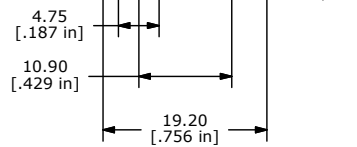

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X±0.4
X.XX±0.25
3. MECHANICAL LIFE: 30,000
4. ELECTRICAL LIFE: 10,000
5. CONTACT RESISTANCE: 20 mΩ
6. INSULATION RESISTANCE: 1000 MΩ
7. OPERATING TEMPERATURE: -10°C TO 55°C
8. CONTACT RATING: 15A-250 VAC, 125VAC, UL APPROVED
10A 250VAC, VDE APPROVED
9. DIELECTRIC STRENGTH: 1500V FOR 1 MIN
10. LAMP: NEON, 125VAC
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (RoHS) COMPLIANT.
13. OPERATING FORCE: 750±100grams



REV	PCR NO	DESCRIPTION	DATE	BY
D	21294	MODEL HAD FOUR TERMINALS	11/5/13	EBP
C	17722	ADDED NOTE # 13	9/27/07	BF

TITLE PB1973CBLKRILEF1

SCALE	DATE	DR	DWG	REV
1.5	9/27/2007	BF	M197301	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED