

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[63735-101LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



FCIconnect.com


Copyright FCI

1 | 2

3

4

PRODUCT NO
63735-101
63735-101LF

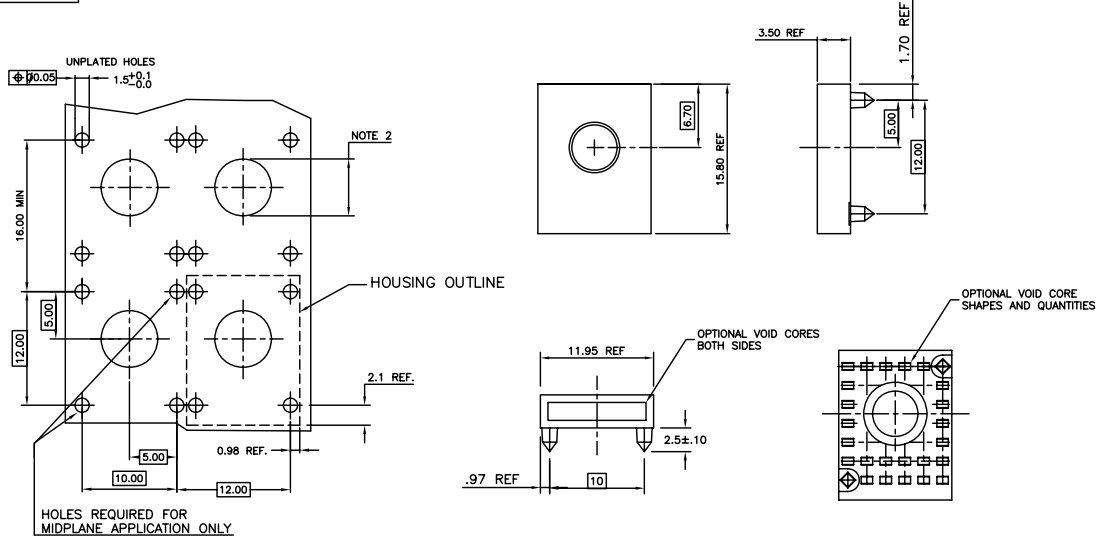

NOTES

- ① MATERIAL: LCP, 30% GLASS FILLED, FLAME RETARDANT ACC. TO UL 94-V0 COLOR: NATURAL
- ② -WHEN USED WITH GUIDE PIN, HOLE DIAMETER TO BE 3.25 $\pm$ 0.10 AND UNPLATED.
-WHEN USED WITH STR. SCREW-TO-BOARD HIGH POWER INSERT, HOLE DIAMETER TO BE 3.25 $\pm$ 0.10 AND PLATED WITH 5.00 MIN. PAD DIAMETER.
-WHEN USED WITH A PLUG/PLUG HIGH POWER COAX COUPLER OR A RECEPTACLE/RECEPTACLE COAX COUPLER, HOLE DIAMETER TO BE 6.00 $\pm$ 0.10/-0.00 AND UNPLATED.
3. MAX. FLASH 0.1MM
4. LEAST MATERIAL CONDITION ACC. TO ANSI Y14.5

5. FOR LEAD FREE NUMBERS, ADD AN 'LF' SUFFIX. PART NUMBERS THAT DO NOT END IN 'LF' ARE LEAD FREE. EXAMPLE: 63735-101LF
6. THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF AND THE NONE LF PART NUMBERS MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
7. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOUR PHASE REFLOW OVEN.

A V90642 MDF 6/3/99
B V91703 MDF 7/19/99
C V94015 MDF 9/22/99
D V00020 JWS 1/25/00
E V05-0458 TAB 5/16/05
F V06-0077 JRV 3/14/06

NOTE 1				surface	tolerance	projection	product family
ltr	ecm no	dr	date	ASME Y14.5	ASME Y14.5		METRAL (tm)
D	V00020	JWS	2000-01-25	angles	X43	MM	4 ROW HYBRID HEADER HSG.
E	V05-0458	TAB	2005-05-16		X0419	scale 2.25:1	COAX, W/O WALLS, 12mm
F	V06-0077	JRV	2006-03-14	0° ± 2°	X004051		dwg no
G	V06-0606	JRV	2006-06-21	dr	M. FETROW	1999-06-03	sheet 1 of 1 size
				engr	D. McCLUNE	1999-06-03	A4
				ctr	D. McCLUNE	1999-06-03	type
				appd	D. McCLUNE	1999-06-03	CUSTOMER Drawing
sheet index	revision sheet	G	1				

form: A4mmX1c

1

2

3

4

PDM: Rev:G

STATUS: Released

Printed: Jul 28, 2010