

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[P227EE2B20A](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF

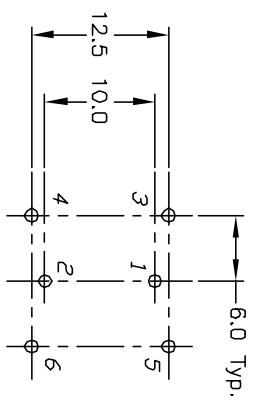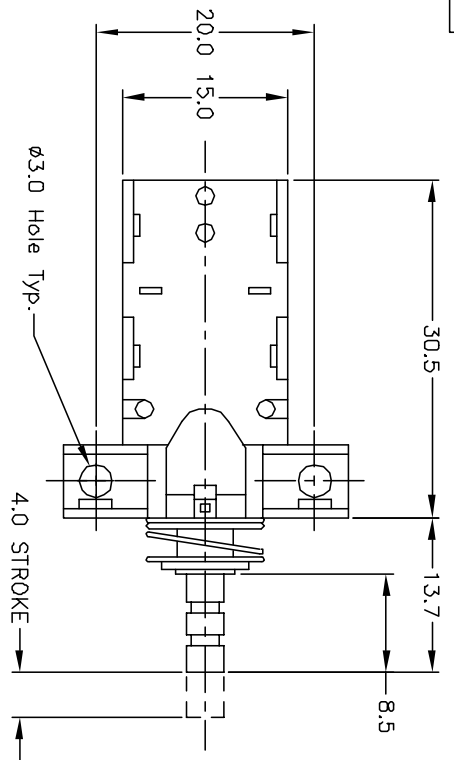

RECOMMEND P.C.B. LAYOUT

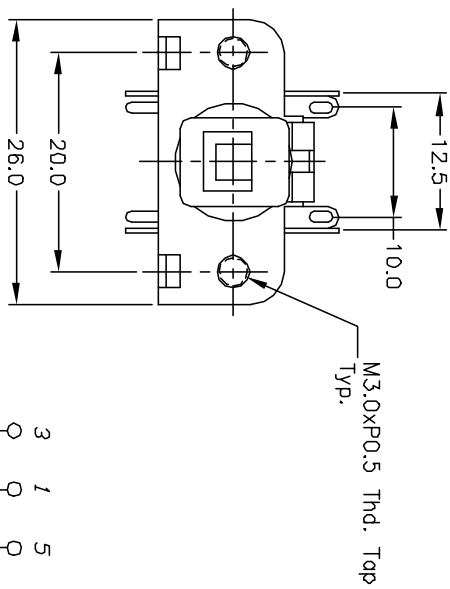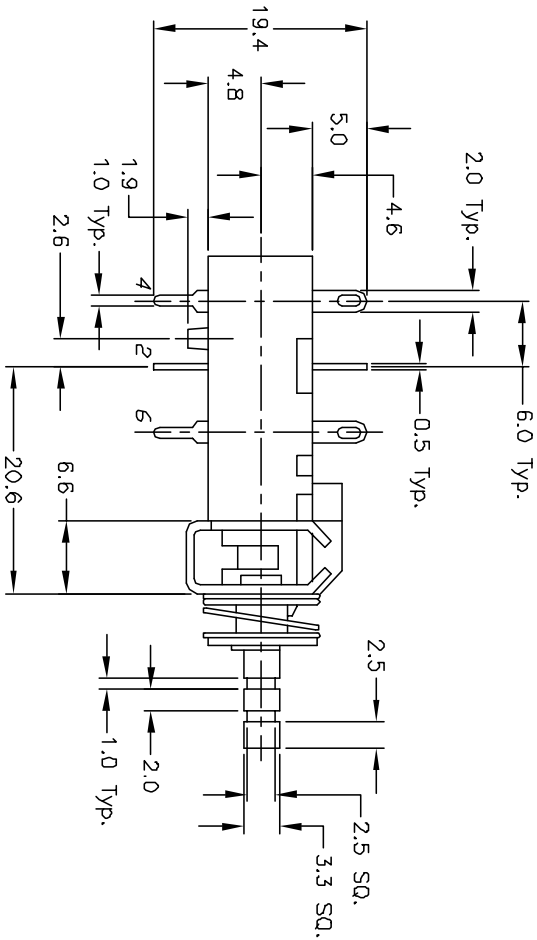

CIRCUIT: DPDT
 CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: AC 125V 7A, AC 250V 4A
5. CONTACT RESISTANCE: 20m ohm max. at 5V DC 1A.
6. DIELECTRIC STRENGTH: AC 1500V RMS
7. LIFE EXPECTANCY: Electrical: 6,000 cycle
8. OPERATING FORCE: 550 ± 150 gf
9. TRAVEL: Full: 5.5mm, Lock: 4.0mm

TITLE			
P227 EE 2B20A			
E-SWITCH®			
REV.	ECN No.	DESCRIPTION	DATE
B	10361	REVISED & REDRAWN	9/16/99
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE	DATE	DR	WVG
1.5:1	10/31/95	MM	P030100
REV			
B			