

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[61848-220CA](#)



For any questions, you can email us directly:
sales@integrated-circuit.com

PRODUCT NO.
61848-220CA/220CALF

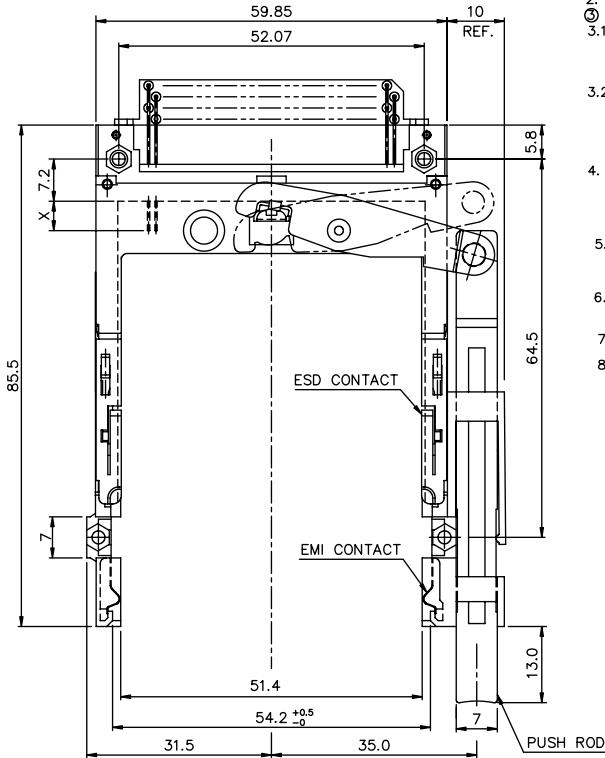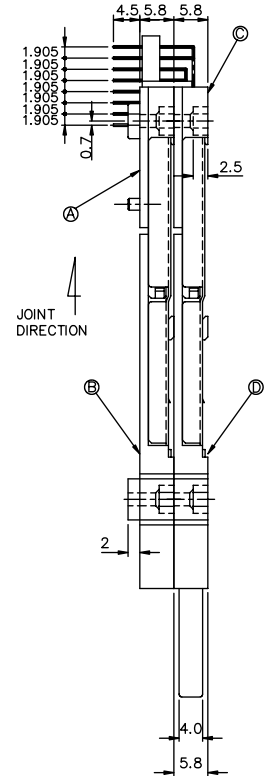

- NOTES:
- EJECT FORCE : 3.5 Kg MAX.
 - EJECT TRAVEL: 8.0mm
 - MATERIAL
 - PART ④ AND ⑤ (HEADER ASS'Y)
PLASTIC : HOUSING ...LCP UL94V-0 BLACK
LOCATOR ...G.F. 6/6 NYLON UL94-V0 BLACK
PIN : PHOSPHOR BRONZE
 - PART ⑥ AND ⑦ (EJECT MECHANISM ASS'Y)
PLASTIC : GUIDE: POLYPHTHALAMID UL94V-0 BLACK
PUSH ROD: POLYPHTHALAMID UL94V-0 BLACK
PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
 - FINISH (PIN)
UNDER PLATING : 0.5 um MIN. Ni
CONTACT AREA : 0.1 um MIN. GOLD OVER 0.5 um MIN. Pd-Ni
SOLDER TAIL : 2.5 um MIN. Sn-Pb
SOLDER TAIL : 2.5 um MIN. PURE Sn (FOR -*****LF)
 - DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68
 - IF LEAD FREE P/N, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
 - IF LEAD FREE P/N, THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-005
 - LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

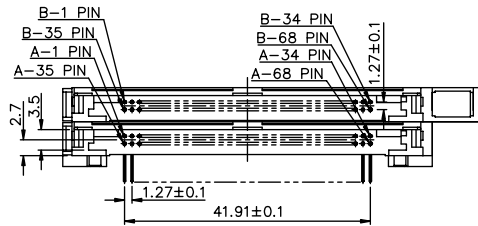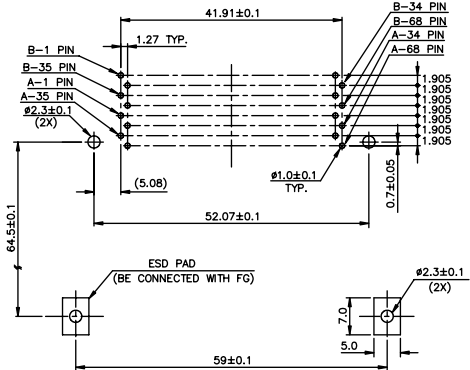

4 CARD INSERTION DIRECTION

mat'l code	tolerance unless otherwise specified	CUSTOMER COPY	ELECTRONICS	
rev. ecn no. dr date	linear	projection	FCI	
A T70129 WL 04/02/97	±0.30	title	68P DOUBLE EJECTOR HEADER ASS'Y FOR TYPE 1/2/3	
B T00288 WL 09/18/00	angles ±2°	product family : PCMCIA	code	TWN
C N05-0192 WB 07/04/04	dr C M HSU 03/04/97	size	dwg no.	sheet
	enrg JOSEPH HSIA 03/04/97	scale	61848	1 OF 2
	chr JOSEPH HSIA 03/04/97	1.5:1		
	appd JENN TASO 03/04/97			
sheet revision C C				
index sheet 1 2				

