

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)
[86092645824755E1LF](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

DIMENSIONS mm (inches)

A

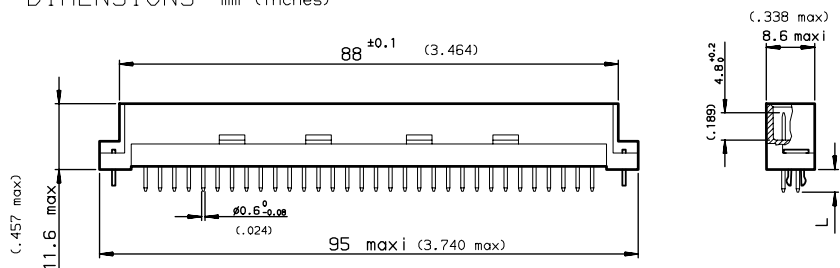


B

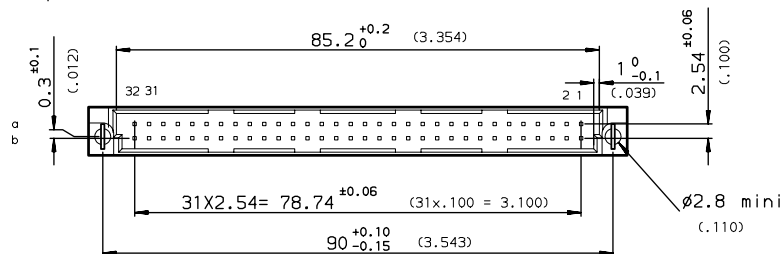

C

PCB DRILLING

component side

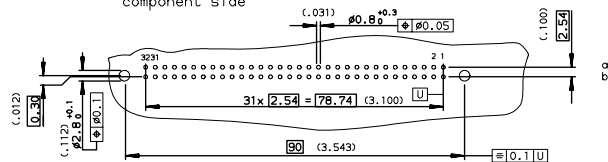

PART NUMBER	8609			58				5	
PIN OUT									
ROW a	1 - 32								
ROWS a-b	2 - 64								
NUMBER OF CONTACTS									
TERMINATION									
L = 2.70 ±0.25 (.106)	24								
L = 4.65 ±0.25 (.183)	14								
OPTIONS									
no option	7 H A R								
with harpoons									
no option	- for PCB thickness 1.6 mm								
with harpoons	- for PCB thickness 2.4 mm								
	- for PCB thickness 3.2 mm								
PERFORMANCE CLASS									
DIN 41612 class 3	4								
DIN 41612 class 2									
DIN 41612 class 1									
TERMINATION TYPE									
TIN LEAD	000E1								
LEAD FREE	E1LF								

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	ROUILLARD	1992/07/17	ANGULAR	LINEAR	0.X	±0.1	size	A3
Eng	TARON	1992/07/17	0.XX	±0.1	0.XXX	±0.1	ECN	LS06-0095
Chr	LEGARE	1992/07/17	0.XXX	±0.1			Product family	DIN 8609
Appr	LEGARE	1992/07/17					Spec ref	-
FCI		STRAIGHT MALE - STYLE Q		2		C-8609-0289		Rev.
SOLDER TO BOARD				D				
catalog no				CUSTOMER		sheet 1 of 1		

rev	ecn no	dr	date
B	-	ROU	1996/02/20
C	LS05-001	JTA	2005/03/01
D	LS06-0095	LGO	2006/06/15
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

REV F - 2006-04-17

1

2

3 PDM: Rev:D

STATUS: Released

Printed: May 14, 2011