

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[8609342E814765000E1](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

DIMENSIONS mm (inches)

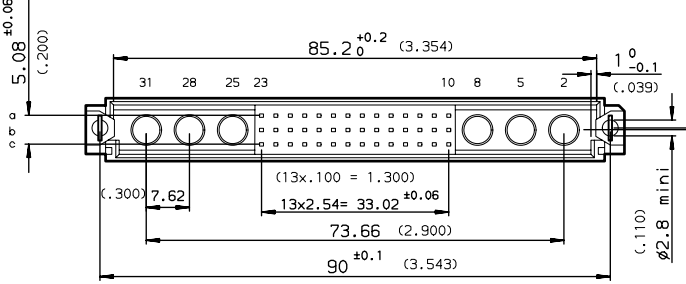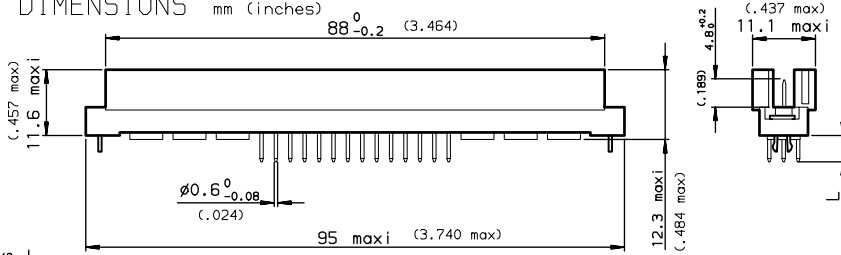


PART NUMBER	8609			E8				5	
PIN OUT									
rows a-b-c				3				42	
rows a-c				4				28	
NUMBER OF CONTACTS									
TERMINATION									
L = 2.70 ±0.25 (.106)								24	
L = 4.65 ±0.25 (.183)								14	
OPTIONS									
no option								7	
with harpoons								H	
								A	
								R	
PERFORMANCE CLASS									
DIN 41612 class 3								4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE									
LEAD FREE								000E1	
								E1LF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
 SEE DRAWING C-8609-0000A

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1996/02/22	ANGULAR	0.X	±0.1	size	Scale
Eng	TARON	1996/02/22	LINEAR	0.XX	±0.1	A3	1.5
Chr	LEGARE	1996/02/22	0.XXX ±2	0.XXX	±0.1	ECN	LS06-0095
Appr	LEGARE	1996/02/22	Product family	DIN 8609		Spec ref	-
FCI		STRAIGHT MALE WITH SPECIAL CONTACTS		2	C-8609-0506		Rev.
SOLDER TO BOARD				8			C
catalog no					CUSTOMER		sheet 1 of 1

PCB DRILLING

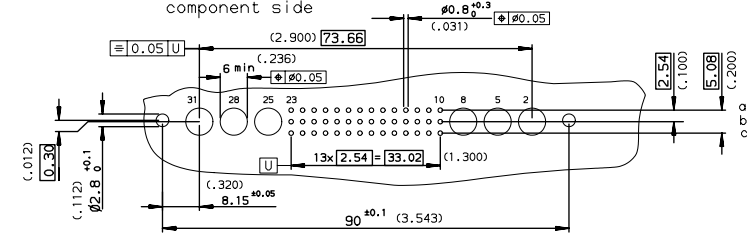

rev	ecn no	dr	date
A	-	-	1996/02/22
B	LS06-001	JTA	2005/03/02
C	LS06-0095	L60	2006/06/26
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI.

REV F - 2008-04-17