

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[84860-1001LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

PRODUCT NUMBER
84860-XXXX
84860-YYYYLF

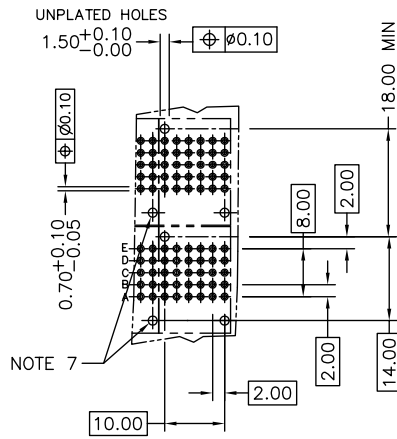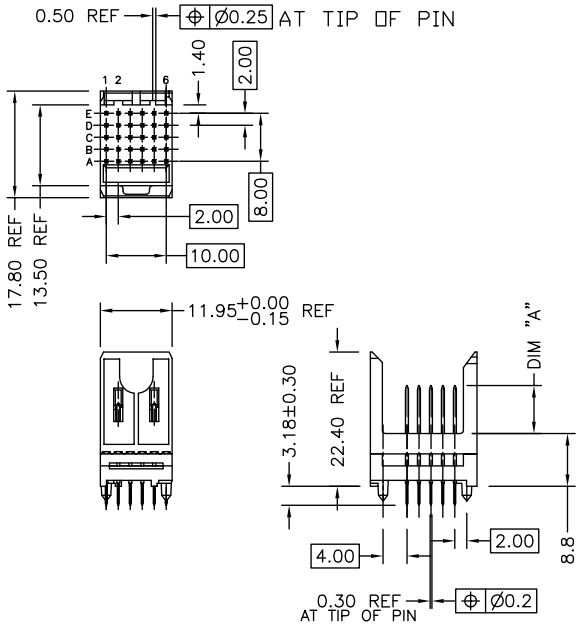

RECOMMENDED HOLE PATTERN
 COMPONENT SIDE
 SEE PRINT 58351 FOR
 ADDITIONAL PCB INFORMATION

PLATING IN CONTACT AREA	
PLATING CODE	PERFORMANCE LEVEL
-1YYY	TELCORDIA CO

mat'l. code	surface	tolerance	projection	product family
SEE NOTES	ASME Y14.5	ASME Y14.5		METRAL
lit	ecn no	dr	date	title
D	V21784	TAB	11/14/02	5 ROW VERT HDR STB SPACER ASS'Y - 12mm
E	V03-0584	TAB	5/20/03	
F	V03-0816	TAB	8/18/03	
G	V05-0892	JRV	9/13/05	
H	V06-0609	DCH	2006-06-22	
J	06-00465-1	TER	2011-7-20	sheet 1 of 2 size
sheet	revision	J	J	dwg no
index	sheet	1	2	84860
				type
				CUSTOMER Drawing



Copyright FCI

FCIconnect.com

PRODUCT NO	ROW	1	2	3	4	5	6
84860-X001	E	01	01	01	01	01	01
	D	02	02	02	02	02	02
84860-X001LF	C	03	03	03	03	03	03
	B	04	04	04	04	04	04
	A	05	05	05	05	05	05
MODULE TYPE SH 2		SM					
SHORTING CLIP TYPE		-					

PRODUCT NO	ROW	1	2	3	4	5	6
84860-X002	E	05	05	05	05	05	05
	D	05	05	05	05	05	05
84860-X002LF	C	05	05	05	05	05	05
	B	05	05	05	05	05	05
	A	05	05	05	05	05	05
MODULE TYPE SH 2		SM					
SHORTING CLIP TYPE		-					

PRODUCT NO	ROW	1	2	3	4	5	6
84860-X003	E	01	01	01	01	01	01
	D	01	01	01	01	01	01
84860-X003LF	C	01	01	01	01	01	01
	B	01	01	01	01	01	01
	A	01	01	01	01	01	01
MODULE TYPE SH 2		SM					
SHORTING CLIP TYPE		-					

SIGNAL PIN KEY	
CODE	DIM "A"
01	5.00
02	5.75
03	6.50
04	7.25
05	8.00

NOTES:

- ① BODY MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS. FLAME RETARDANT ACC. UL 94-V0
- ② PIN MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS: 2-8 μm SnPb 85-97
84860-XXXX IS SnPb
84860-XXXXLF IS Sn (LEAD FREE)
4. PRODUCT MARKING: PART NUMBER & BATCH I.D.
5. THE PRODUCTS WHERE THE PART NUMBER ENDS IN 'LF' MEET THE EUROPEAN DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- 6 FOR LEAD FREE PART NUMBERS, ADD 'LF' SUFFIX.
EXAMPLE: 84860-X001LF
- ⑦ THIS HOLE FOR ADJACENT MODULE.

mat'l. code		surface		tolerance		projection		product family	
SEE NOTES		ASME Y14.5		ASME Y14.5		MM		METRAL	
lit	ecr	no	dr	date	tolerances unless otherwise specified		title		
J					angles	.X±.3	5 ROW VERT HDR STB		
					σ±2°	.XX±.13	SPACER ASS'Y - 12mm		
						.XXX±.051	scale 1:1	dwg no	sheet 2 of size
					dr	M. FETROW	11/12/98	84860	A4
					engr	D. McCLUNE	11/12/98	type	
					chr	D. McCLUNE	11/12/98	CUSTOMER Drawing	
					app	D. McCLUNE	11/12/98		
sheet	revision								
index	sheet								

form: A4mmXLc

PDS: Rel :J

STATUS:Released Printed: Jul 22, 2011