

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)
[86093968196795ALF](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

DIMENSIONS

mm (inches)

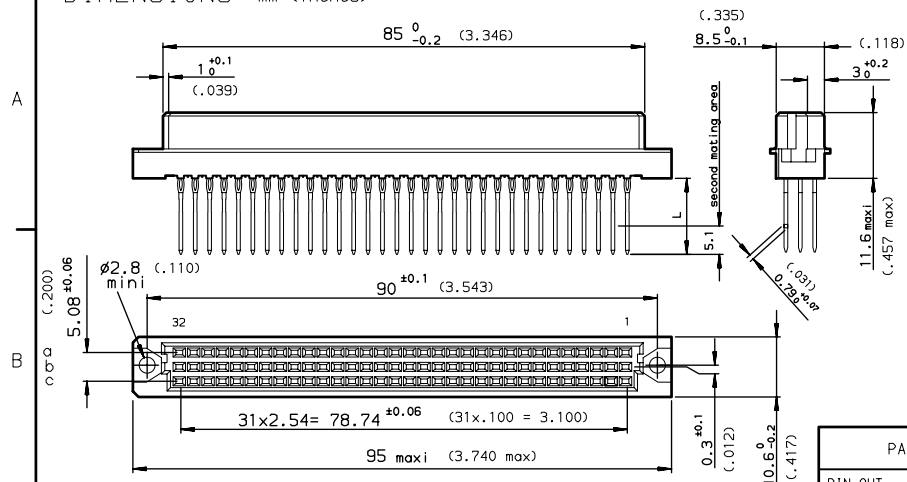

METHOD OF INSERTION
ON THE PCB = FLAT ROCK




Copyright FCI.

PCB DRILLING

component side

plated hole diameter $\phi 1.0$ (+0.10/-0.06) (0.039)

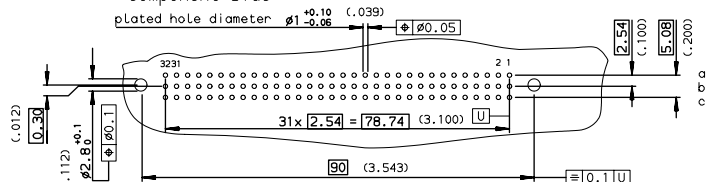

PART NUMBER	8609			81		7	9	5	
PIN OUT									
rows a-b-c	3 - 96								
rows a-c	4 - 64								
NUMBER OF CONTACTS									
TERMINATION									
L = 13.10 ± 0.20 (0.515)	near plug up 96								
L = 17.10 ± 0.20 (0.673)	near plug up + 1 wrap 97								
PERFORMANCE CLASS									
DIN 41612 class 1	9								
TERMINATION TYPE									
TIN LEAD	: 000A								
LEAD FREE	: ALF								

GENERAL CHARACTERISTICS AND ROHS INFORMATION:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1994/10/27	ANGULAR	LINEAR	0.X	± 0.1	size
Eng	TARON	1994/10/27			0.XX	± 0.1	A3
Chr	LEGARE	1994/10/27	0.XXX	± 2	0.XXX	± 0.1	Scale
Appr	LEGARE	1994/10/27	Product family		DIN 8609		1.5
					Spec ref		ECN
							LS06-0095
							Rev.
							H

rev	ecn no	dr	date
F	-	ROU	1999/11/18
G	LS06-004	JTA	2005/02/28
H	LS06-0095	LGO	2006/06/17
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-



STRAIGHT FEMALE - STYLE C
PRESS FIT REAR PLUG UP for NOKIA

C-8609-0434

Rev.

PDM: Rev:H

STATUS: Released

Printed: May 14, 2011

REV F - 2006-04-17

1

2

D