

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[8609342EP13755000E1](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

DIMENSIONS mm (inches)

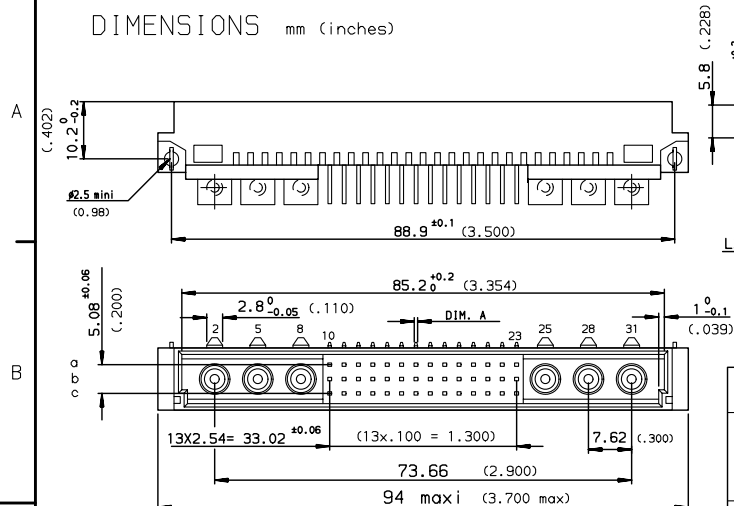

PCB DRILLING

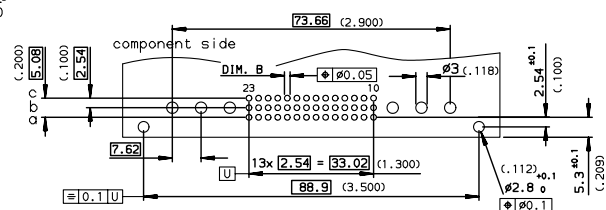

PART NUMBER		8609		EP		13		5	
PIN OUT		rows a-b-c		3		42			
rows a-c				4		28			
NUMBER OF CONTACTS									
TERMINATION		L1 = 2.75 ±0.15 (0.108)		A = Ø0.6 ±0.08		B = Ø0.8 ±0.3		13	
L2 = 3.40 ±0.2 (0.134)									
OPTIONS		no option						7	
with harpoons								H	
PERFORMANCE CLASS		DIN 41612 class 3						4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE		TIN LEAD						000E1	
LEAD FREE								E1LF	

GENERAL CHARACTERISTICS and ROHS INFORMATION
SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
A	-	ROU	1997/09/22
B	LS07-0130	HLE	2007/06/04
C	LS07-0211	HLE	2007/08/09
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1997/09/22	ANGULAR	0.X	±0.1	size	A3
Eng	ROUILLARD	1997/09/22	LINER	0.XX	±0.1	Scale	1.5
Chr	LEGARE	1997/09/22	0.XX ±2	0.XXX	±0.1	ECN	LS07-0211
Appr	LEGARE	1997/09/22	Product family		DIN Spec ref -		
FCI		RIGHT ANGLE MALE STYLE M		deg		C-8609-0612	
		WITH POWER PINS FITTED		Rev.		C	
catalog no		SEE TABLE		CUSTOMER		sheet 1 of 1	

REV F - 2008-04-17