

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)
[88963-101LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

PRODUCT NR.	DIM "A"
88963-X01	5.00 REF.
88963-X11	3.35 REF.
88963-X01LF	5.00 REF.
88963-X11LF	3.35 REF.

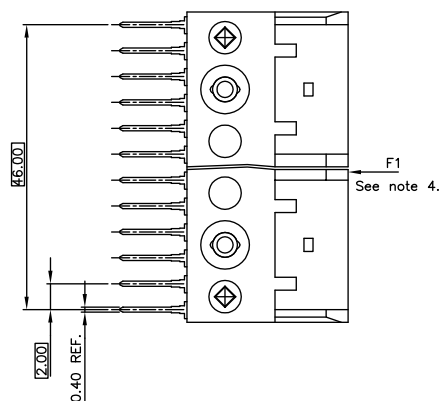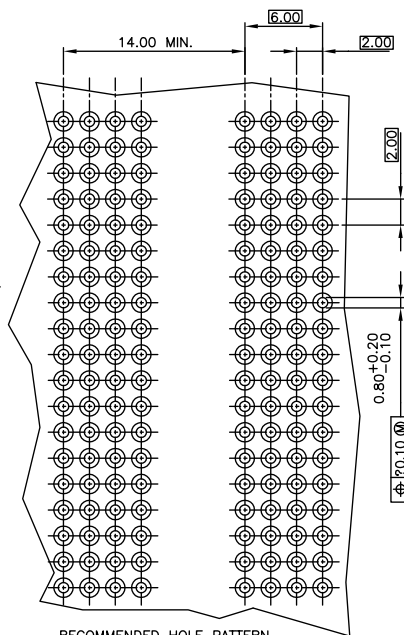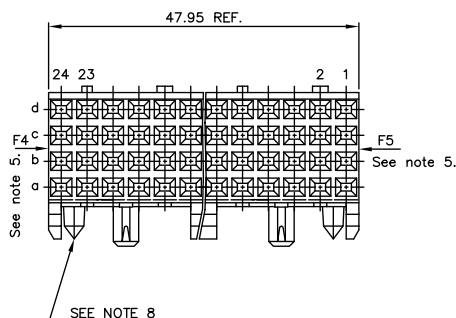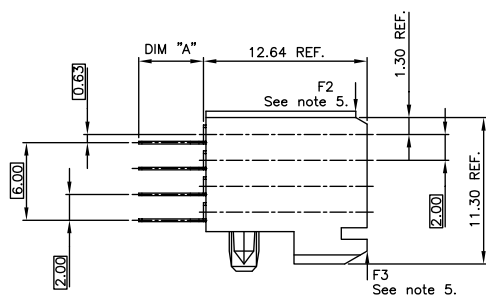

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDERABLES 2-8 μ m SnPb 90-97 OR PURE FOR Sn FOR Lf.
4. LOAD IN THIS DIRECTION (E.G. THROUGH
CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 50 NEWTON MAXIMUM PER
CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE
MODULES ON A BOARD, THE USE OF A FIXTURE
IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE
BOTH SIDES OF PRODUCT.
- 9 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
REQUIREMENTS AS DESCRIBED IN CS-27-008
- 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

matl code		tolerances unless otherwise specified		CUSTOMER COPY	 ELECTRONICS www.falconnet.com	
(trfecn no dr date) M 0009-0117 TER 5/26/08 J 0009-0008Cenhrb06/05/08		linear	projection	title STR FEMALE STB signal 48mm product famMETRAL tsm code 213		
D H403636A 0608 040712 chr J.M.Bourkneagt 930120 E V91450 4008 090027 enr J.W.Jones 931122 F 0606-446 CLU 051121 chr J.W.Jones 931122		angles		size dwg no 889693 sheet 1 of 1		
G 0007-0107Cenhrb05/22/07app J.M.Bourkneagt 930121			scale 5:1			
sheet revision (drawn)						