


Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[HM2R10PACAM8N9](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

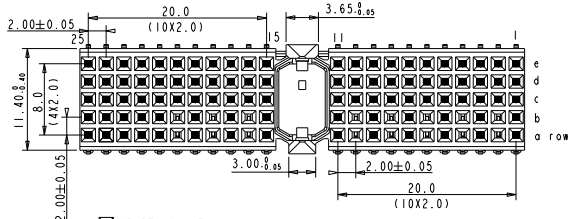

□ EMPTY CAVITY
 ■ CAVITY LOADED WITH CONTACT

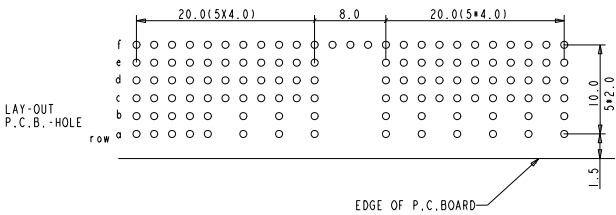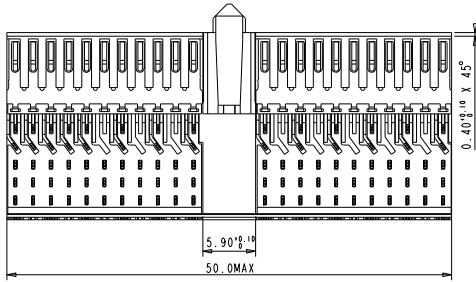

PERFORMANCE CHARACTERISTICS

CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE: -55°C TO 125°C
 CONTACT RESISTANCE: 20 mΩ MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE: 0.15N MIN /CONT
 INSULATION RESISTANCE: 10¹⁰ MΩ MIN

NOTES

- 1. LEAD FREE INDICATOR : LF=LEAD FREE
- 2. PERFORMANCE LEVEL INDICATOR (REF DWG NO. BSC 201844.003)
- 3. THIS PRODUCT IS CSA APPROVED, THIS PRODUCT IS UL RECOGNIZED.
- 4. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- 5. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date	Dr	M.Fret	06-07-02	Product family	MILLIPACS	size	Scale
B	EC B20139	MF	020802	Eng					AI	5,000
C	DG05-0278	MM	05-08-05	Chr			Model Name	ECN	DG05-0278	
				Appr			Model Revision	REL Level		
							MPACS 5+1R RA RCP TYPE A LOADING PATTERN		BSC202468036	Rev. C