

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)


[92250-188LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com





PRODUCT NO	NUMBER OF POS.	LOADED POSITION	LEAD FREE OPTION	COLOR
92250-X88	8	ALL POS.	NOTE 6 & 8	BLACK
92250-X86		2,3,4,5,6,7		
92250-X84		3,4,5,6		
92250-X88G		ALL POS.		GRAY

NOTE: PLEASE CHECK FOR AVAILABILITY, NOT ALL OPTIONS AVAILABLE.




POS. NO. CONFIGURATION

PLATING CODE X	PLATING
0	5u" Au + high performance lubricant
1	15u" GXT
3	5u" Au + high performance lubricant
5	50u" GXT

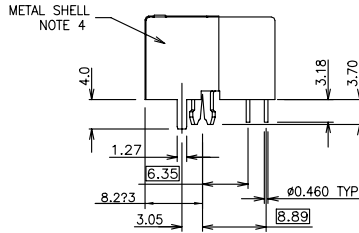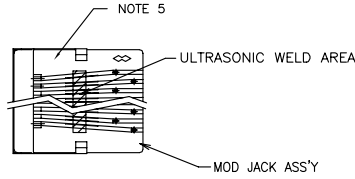

P.C.B. HOLE PATTERN VIEWED FROM TOP.



NOTE: PLEASE CHECK FOR AVAILABILITY, NOT ALL OPTIONS AVAILABLE.

- NOTES:
- RECOMMENDED P.C.B THICKNESS 1.60 MM
 - HOUSING MAT'L: NYLON 6/6, 25% GLASS REINFORCED.
 - CONTACTS: PHOS BRONZE ALLOY UNS-C51000, ϕ 0.460 ROUND WIRE, PLATING SEE TABLE.
 - SHIELDING MATERIAL:
0.25 [0.010] THICK BRASS ALLOY 2.54mm/100?
TIN-LEAD PLATED, OVER 1.02mm/40? MIN NICKEL UNDERPLATING
PER BUS-15-002/M.
LEAD FREE OPTION:
0.25 [0.010] THICK BRASS ALLOY 2.03mm/80?
TIN PLATED, OVER 1.02mm/40? MIN NICKEL UNDERPLATING
PER BUS-15-002/M.
 - COMPANY LOGO LOCATED IN THIS AREA.
 - ADD LF SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
 - PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOMER.

mat'l. code	surface	tolerance	projection	product family
	ISD1302 ✓	ISD1101 ISD406		MOD JACK
tr tecn ndar date	tolerances unless otherwise specified			title
K N06-256 WG 12/05/08	angles	0.X±0.3	mm	LOW PROFILE PCB III
L N08-097 SH 09/24/08	0°±2'	0.XX±0.15	scale 1.0	8 POS SHIELDED M/J
M ELX-N-010688 SH MW 3/14/12	dir	K.CHEN 6/27/92	FCI	dwg no 92250
	engr	TONY CHEN 6/27/92		sheet 1 of 1
	chr	TONY CHEN 6/27/92		size A4
	appd	JENN TSAO 6/27/92		type Product Customer Drawing
sheet index	revision	sheet	1	