

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[FCI](#)
[HM2R03PA5101N9](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

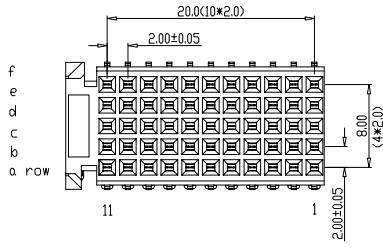


PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT / CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁸ MΩ MIN



- NOTES 1' LEAD FREE INDICATOR 'LF'=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC 201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA-201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

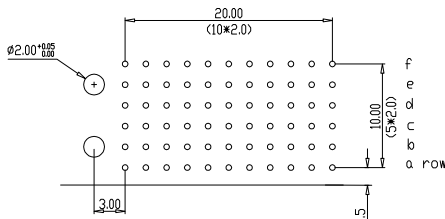

LAY-OUT
P.C.B. - HOLE

Material		Spec ref	
Mat code		tolerance	
Heatreat		1 DEC + 02 DEC	
Plating/Finish		2 DEC + 03 DEC	
Dr		ANGLES ± 1° MAX	
W/Paris		07-04-92	
Eng		Product family	
Chr		MILLIPACS	
Appr		Model Name	
		ECN	
		REL Level	
FCI		size A4	
title		Scale 2.000	
MPACS 5+2R RA RCP		projection	
CONN TYPE C		MM	
drwg no		BSC201444003	
HM2R03PA5101----		Rev. E	
CUSTOMER DRAWING		sheet 1 of 1	