

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[94927-088LF](#)



For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)





**NOTES:**

1. RECOMMENDED P.C.B. THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, COLOR: GRAY
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000,  $\phi$  0.460 ROUND WIRE, PLATING SEE TABLE.
- ④ METAL SHELL MATERIAL:  
 COPPER ALLOY, 0.20MM THICK.  
 FINISH: FOR 94927-XXX,TIN-LEAD, 100u" THICK MIN.  
 FOR 94927-XXXLF,PURE BRIGHT TIN 80u" THICK MIN.
- ⑤ INSULATED TAPE: 3M COMPANY TAPE #5
6. PACKAGING PER GES-14-361, USING TUBE
7. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD
9. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION

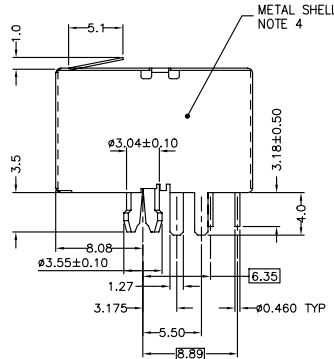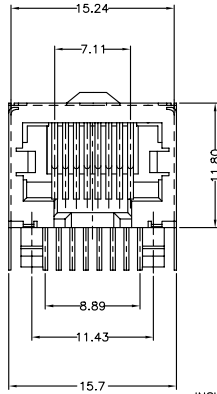


PRODUCT NO	NUMBER OF POS.	LOADED POSITION	PLATING
94927-088	8	ALL POS.	5u" Au + high performance lubricant
94927-088LF			

INSULATED TAPE NOTE 5



MOD JACK ASS'Y



POS. NO. CONFIGURATION

mat'l. code	surface	tolerance	projection	product family
	ISDI302 ✓	ISDI101 ISDI406		MOD JACK
ltr	ecr	ndr	date	tolerances unless otherwise specified
B	T50286	Q	10/20/95	0.X±0.3
C	T03-0443	WL	10/06/03	0.XX±0.15
D	N05-0030	YS	02/05/05	0°±2'
E	BLX-N-011003SH	MM	03/25/12	0.XXX±0.05
	dr	CL FENG	03/06/95	scale 2.0
	engr	TONY CHIEN	03/06/95	mm
	chr	TONY CHIEN	03/06/95	LOW PROFILE PCB III 8 POS
	appd	JENN TSAO	03/06/95	MOD JACK, FULLY SHIELDED
				dwg no
				94927
				sheet 1 of 1
				A4
sheet	revision	E		type
index	sheet	1		Product Customer Drawing