

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[0ZRC0010FF1E](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Radial Leaded PTC  
0ZRC Series

HF Pb OZRC Series Fuse

RoHS 6 Compliant &amp; Halogen-Free

## Application

Telecom and wide variety of electronic equipment

## Product Features

Low Hold Current, 90V rating - replaces 30, 60 and 72V rated devices

## Operating (Hold Current) Range


100mA - 3.75A

## Maximum Voltage

Up to 90VDC

## Temperature Range

-40°C to 85°C

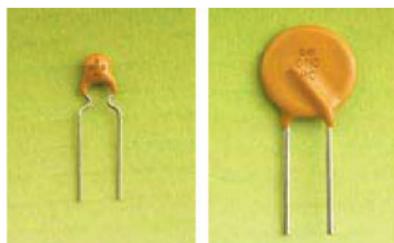

## Electrical Characteristics (23°C)

	Part Number (Bulk)	Hold Current	Trip Current	Max Time to Trip @ 5xIH	Max Current	Rated Voltage	Typical Power	Resistance Tolerance			Agency Approvals	
		IH, A	IT, A	Seconds	Imax, A	Vmax, Vdc	Pd, W	Rmin Ohms	Rmax Ohms	R1max Ohms	UL	TÜV
A	0ZRC0010FF1E	0.10	0.20	4.0	40	90	0.38	2.50	6.000	7.50	Y	
B	0ZRC0015FF1E	0.15	0.35	10.0	40	90	0.70	2.40	5.500	7.00	Y	
C	0ZRC0017FF1E	0.17	0.34	3.0	40	90	0.48	2.00	3.720	8.00	Y	
D	0ZRC0020FF1E	0.20	0.40	2.2	40	90	0.41	1.83	3.300	4.40	Y	
E	0ZRC0025FF1E	0.25	0.50	2.5	40	90	0.45	1.25	2.280	3.00	Y	
F	0ZRC0030FF1E	0.30	0.60	3.0	40	90	0.49	0.88	1.596	2.10	Y	
G	0ZRC0035FF1E	0.35	0.75	10.0	40	90	1.30	0.70	1.300	2.50	Y	
H	0ZRC0040FF1E	0.40	0.80	3.8	40	90	0.56	0.55	1.032	1.29	Y	Y
I	0ZRC0050FF1E	0.50	1.00	4.0	40	90	0.77	0.50	0.770	1.17	Y	Y
J	0ZRC0055FF1E	0.55	1.20	10.0	40	90	1.50	0.40	0.720	1.50	Y	Y
K	0ZRC0065FF1E	0.65	1.30	5.3	40	90	0.88	0.31	0.520	0.72	Y	Y
L	0ZRC0075FF1E	0.75	1.50	6.3	40	90	0.92	0.25	0.400	0.60	Y	Y
M	0ZRC0090FF1E	0.90	1.80	7.2	40	90	0.99	0.20	0.330	0.47	Y	Y
N	0ZRC0110FF1A	1.10	2.20	8.2	40	90	1.50	0.15	0.300	0.38	Y	Y
O	0ZRC0135FF1A	1.35	2.70	9.6	40	90	1.70	0.12	0.228	0.30	Y	Y
P	0ZRC0160FF1A	1.60	3.20	11.4	40	90	1.90	0.09	0.180	0.22	Y	Y
Q	0ZRC0185FF1A	1.85	3.70	12.6	40	90	2.10	0.08	0.144	0.19	Y	Y
R	0ZRC0250FF1A	2.50	5.00	15.6	40	90	2.50	0.05	0.096	0.13	Y	Y
S	0ZRC0300FF1A	3.00	6.00	19.8	40	90	2.80	0.04	0.072	0.10	Y	Y
T	0ZRC0375FF1A	3.75	7.50	24.0	40	90	3.20	0.03	0.060	0.08	Y	Y

IH Hold Current-maximum current at which the device will not trip in still air at 23°C.

IT Trip current-minimum current at which the device will always trip in still air at 23°C.

Imax Maximum fault current device can withstand without damage at rated voltage (Vmax).

Vmax Maximum voltage device can withstand without damage at its rated current.

Pd Typical power dissipated by device when in tripped state in 23°C still air environment.

Rmin Minimum device resistance at 23°C.

Rmax Maximum device resistance at 23°C.

R1max Maximum device resistance at 23°C, 1 hour after initial device trip, or after being soldered to PCB in end application.

Specifications subject to change without notice

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA+1 201.432.0463  
techhelp@belfuse.com  
belfuse.com

# Radial Leaded PTC

## OZRC Series

  OZRC Series Fuse

RoHS 6 Compliant & Halogen-Free

### PTC's - Basic Theory of Operation / "Tripped" Resistance Explanation

Fundamentally, a Bel PTC consists of a block of polymeric material containing conductive filler and bonded between two conductive, planar terminations.

At currents below the device IHOLD rating, AND at temperatures below 100C, the PTC maintains a resistance value below its R1 MAX rating.

As the device's temperature approaches 130C, either due to an increase in ambient temperature or a current exceeding its I TRIP rating, volumetric expansion of the filled polymer breaks apart the majority of conductive pathways across the terminals created by chain contact of adjacent filler particles or device resistance increases sharply by several orders of magnitude.

At the much higher "Tripped" resistance, there is just enough leakage current to allow internal heating to "hold" the device in its tripped state (around 125C) until power is interrupted. Once power is removed, the PTC's core cools and contracts allowing conductive chains to reform and return the device to its low resistance state.

The catalog data for each device specifies a "Typical Power" value. This is the power required to exactly match the heat lost by the tripped device to its ambient surroundings at 23C. By Ohm's Law, power can be stated as:  $W = E^2/R$ . Thus the approximate resistance of a "Tripped" PTC can be determined by:  $R = E^2/W$ , where "E" is the voltage appearing across the PTC (usually the supply's open circuit voltage), and "W" is the Typical Power value for the particular PTC. Since the PPTC acts to maintain a constant internal temperature, its apparent resistance will change based upon applied voltage and, to a lesser degree, ambient conditions. Consider the following example....

A PTC with a Typical Power of 1 watt protecting a circuit using a 60V supply will demonstrate an apparent, tripped resistance "R" of:


$$R = 60^2/1 = 3,600 \text{ ohms}$$

This same tripped device when used to protect a 12V circuit would now present an apparent resistance of:

$$R = 12^2/1 = 144 \text{ ohms}$$

The value for Typical Power is "typical" because any physical factors that affect heat loss (such as ambient temperature or air convection) will somewhat alter the level of power that the PTC needs to maintain its internal temperature. In short, PTCs do not exhibit a constant, quantifiable tripped resistance value.

### Type Time - To - Trip at 23°C

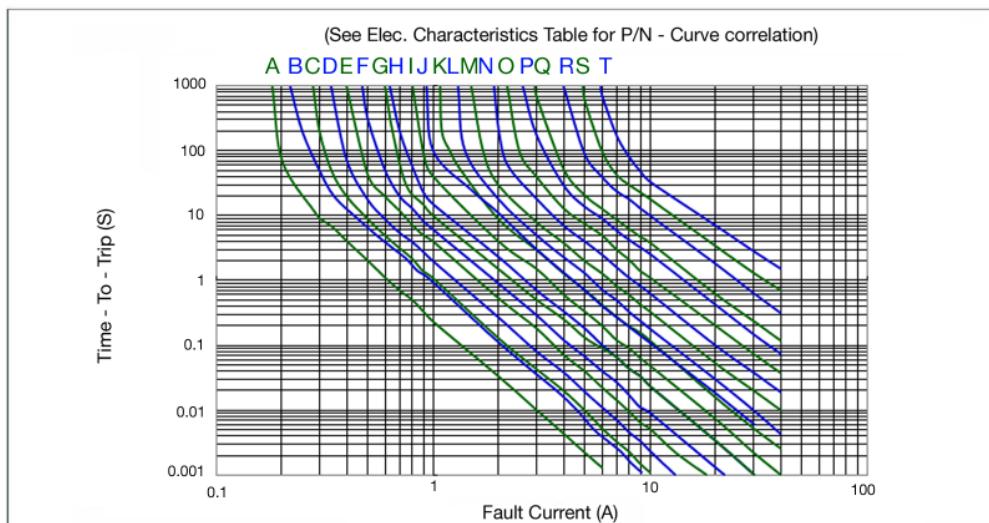

Specifications subject to change without notice



**bel**  
POWER  
SOLUTIONS &  
PROTECTION  
a bel group

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
techhelp@belf.com  
[belfuse.com](http://belfuse.com)

Radial Leaded PTC  
OZRC Series

## HF P6 OZRC Series Fuse

RoHS 6 Compliant &amp; Halogen-Free

## Physical Specifications

## Lead material:

Matte tin plated copper, size / diameter as shown in Drawings and Table under Product Dimensions.

## Soldering characteristics

MIL-STD-202, Method 208H.

## Insulating coating

Flame retardant epoxy, meets UL-94-V-0 requirements.

## PTC Marking

"bel" or "b", , LH code and "RC" .

## Product Dimensions




Fig.1



Lead Size : 24AWG  
Φ0.51 mm Diameter

Fig.2

Lead Size : 20AWG  
Φ0.81 mm Diameter

Part Number	Fig.	All dimensions in mm.					
		A Max	B Max	C Typical	D Min	E Max	F Typical
0ZRC0010FF-0025FF	1	7.4	12.7	5.1	7.6	3.1	1.1
0ZRC0030FF	1	7.4	13.0	5.1	7.6	3.1	1.1
0ZRC0035FF	1	7.4	12.7	5.1	7.6	3.1	1.1
0ZRC0040FF	1	7.6	13.5	5.1	7.6	3.1	1.1
0ZRC0050FF	1	7.9	13.7	5.1	7.6	3.1	1.1
0ZRC0055FF	1	9.7	14.0	5.1	7.6	3.1	1.1
0ZRC0065FF	1	9.7	14.5	5.1	7.6	3.1	1.1
0ZRC0075FF	1	10.4	15.2	5.1	7.6	3.1	1.1
0ZRC0090FF	1	11.7	15.8	5.1	7.6	3.1	1.1
0ZRC0110FF	2	13.0	18.0	5.1	7.6	3.1	1.4
0ZRC0135FF	2	14.5	19.6	5.1	7.6	3.1	1.4
0ZRC0160FF	2	16.3	21.3	5.1	7.6	3.1	1.4
0ZRC0185FF	2	17.8	22.9	5.1	7.6	3.1	1.4
0ZRC0250FF	2	21.3	26.4	10.2	7.6	3.1	1.4
0ZRC0300FF	2	24.9	30.0	10.2	7.6	3.1	1.4
0ZRC0375FF	2	28.5	33.5	10.2	7.6	3.1	1.4

## Thermal Derating Curve

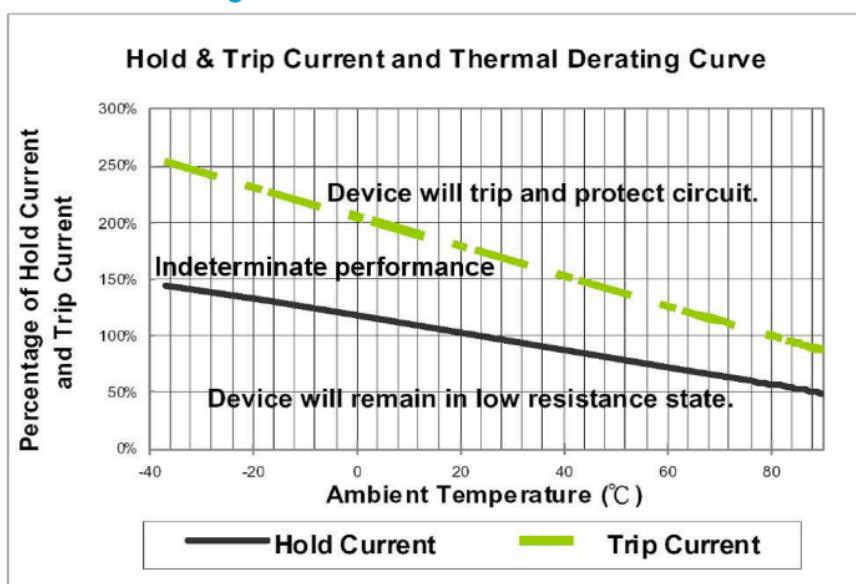

## Cautionary Notes

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.
5. These devices are intended for use in DC voltage applications only. Use in AC voltage applications should be first discussed with Bel Fuse engineering.
6. Not recommended for use on potted or conformal coated PCB's. Restriction of free air flow could affect electrical performance and/or result in device failure. Consult Bel Fuse engineering.
7. In the "Indeterminate Performance / grey zone", tripping may occur but cannot be relied upon. For special circumstances considering use within this region, consult Bel Fuse Engineering.

Specifications subject to change without notice


Radial Leaded PTC  
OZRC Series

HF P6 OZRC Series Fuse

RoHS 6 Compliant &amp; Halogen-Free

## Soldering Parameters

Lead-free Wave Soldering Profile	
Wave Solder Parameter	
Average ramp-up rate	200°C / second
Heating rate during preheat	typical 1 - 2°C / second Max 4°C / second
Final preheat temperature	within 125°C of soldering temperature
Peak temperature T <sub>p</sub>	260°C
Time within +0°C / -5°C of actual peak temperature	5 seconds
Ramp-down rate	5°C / second max.

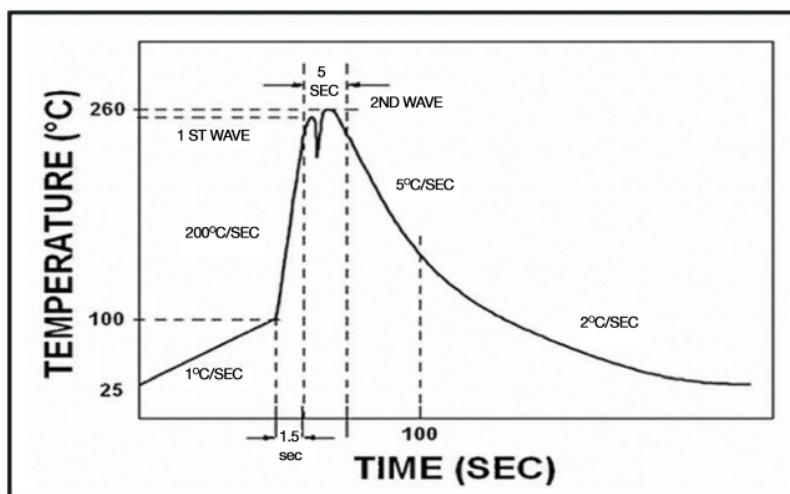

## Standard Packaging

P/N	Bulk		Reel/Tape	
	Pcs/Box	P/N Code	Pcs/Reel	P/N Code
0ZRC0010FF	3000	1E	3000	2E
- 0ZRC0090FF				
0ZRC0110FF	1000	1A	1500	2B
- 0ZRC0185FF				
0ZRC0250FF	1000	1A	N/A	N/A
- 0ZRC0375FF				

## P/N Explanation and Ordering Information

PTC series	0ZRC	XXXX	X X XX
0ZRC Series			
I HOLD Rating			
Refer to Part Number and IH Rating in Electrical Characteristics Table on P.1.			
Electrical Characteristics			
F = Standard Design			
A to Z (except F) = Special, customer spec, DCR sort, etc.			
Mechanical Features			
F = Standard Design			
A to Z (except F) = Special, customer spec, lead forming, etc.			
Tape & Reel Qty			
See standard packaging			

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
techhelp@belf.com  
[belfuse.com](http://belfuse.com)