

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2450FB15K0001E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRELIMINARY

2.45 GHz Balun / Filter Combination

P/N 2450FB15K0001

Detail Specification: 05/11/06

Page 1 of 2


General Specifications

Part Number	2450FB15K0001
Frequency (MHz)	2400~2500
Unbalanced Impedence	50 Ω
Differential Balanced Imp.	Conjugate match to CSR BC03, BC04
Insertion Loss	3.8 dB max.
Return Loss	9.5 dB min.
Phase Difference	180° $\pm$ 10
Amplitude Difference	1.5 dB max.

Attenuation (dB)	45 min.@ 880~960MHz
	30 min.@1710~1880 MHz
	30 min.@1880~1990MHz
	20 min.@2110~2170MHz
	30 min.@4800~5000MHz
20 typ.@7200~7500MHz	
Operating and Storage Temp.	-40 to +85°C
Reel Quantity	4,000
Power Capacity	1.0 watt max.


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.004	2.00 $\pm$ 0.10
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.028 $\pm$ 0.004	0.70 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 $\pm$ 0.004/-0.008	0.30 $\pm$ 0.1/-0.2
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

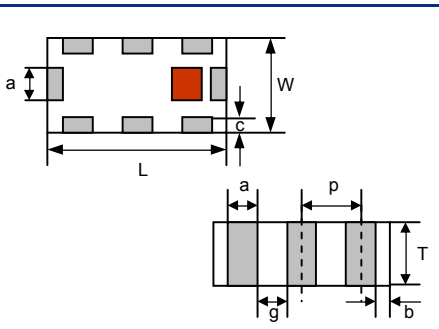

Terminal Configuration


No.	Function
1	Unbalanced Port
2	NC or DC Feed
3	NC or DC Feed
4	GND
5	Balanced Port
6	GND
7	Balanced Port
8	GND



Mounting Considerations

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

** By-pass capacitor should be connected when feeding DC power.

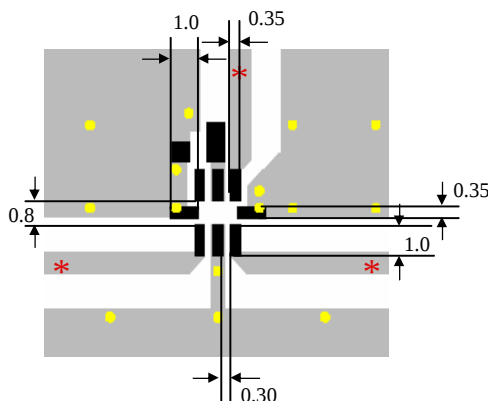

Units: mm

- Solder Resist
- Land
- Through-hole (ϕ 0.3)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

PRELIMINARY

2.45 GHz Balun / Filter Combination


P/N 2450FB15K0001

Detail Specification: 05/11/06

Page 2 of 2

Typical Electrical Performance (T=25°C)

* Note: The balanced ports (pins 5 & 7) are terminated with a balanced impedance of $22-j*84$.

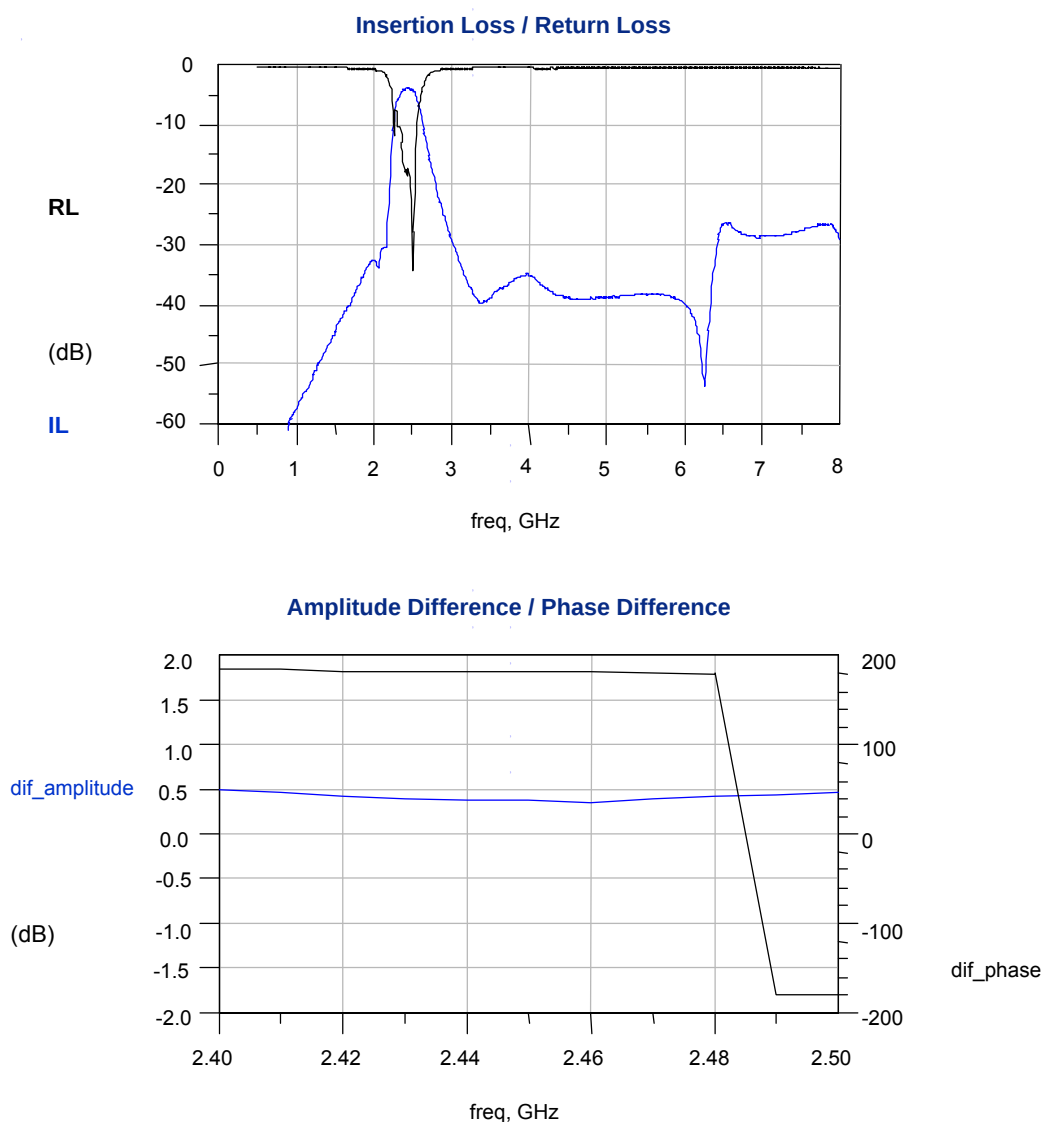

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.