

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2500BP15M400E](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

2.45 GHz Band Pass Filter

P/N 2500BP15M400

Detail Specification: 07/02/09

Page 1 of 2

General Specifications

Part Number	2500BP15M400
Frequency (MHz)	2300 - 2700
Insertion Loss	2.0 dB max.
Return Loss	9.5 dB min.
Attenuation (min.)	15 dB @ 100 - 1800 MHz
Attenuation (min.)	20 dB @ 3400 - 11700 MHz

Impedance	50 Ω
Input Power	500 mW max.
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	4,000

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2500BP15M400S
		T & R	Suffix = E	Eg. 2500BP15M400E
	Termination Style	100% Tin	Suffix = None	Eg. 2500BP15M400(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 2500BP15M400(E or S)/Pb

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN


Mechanical Dimensions

	In	mm
L	0.079 ± 0.006	2.00 ± 0.15
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.049 ± 0.006	1.25 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 ± 0.006	0.25 ± 0.15
d	0.014 ± 0.006	0.35 ± 0.15

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

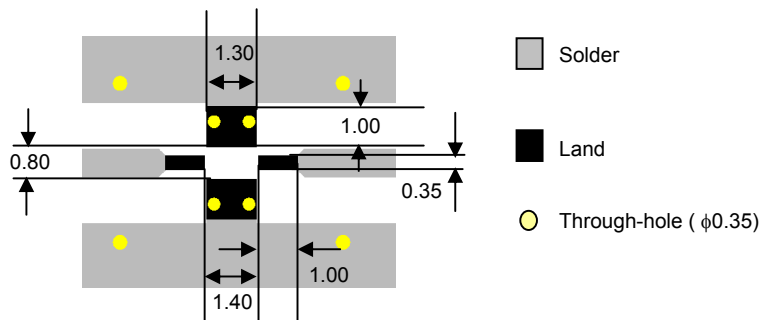

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.45 GHz Band Pass Filter

P/N 2500BP15M400

Detail Specification: 07/02/09

Page 2 of 2

Typical Electrical Performance (T=25°C)

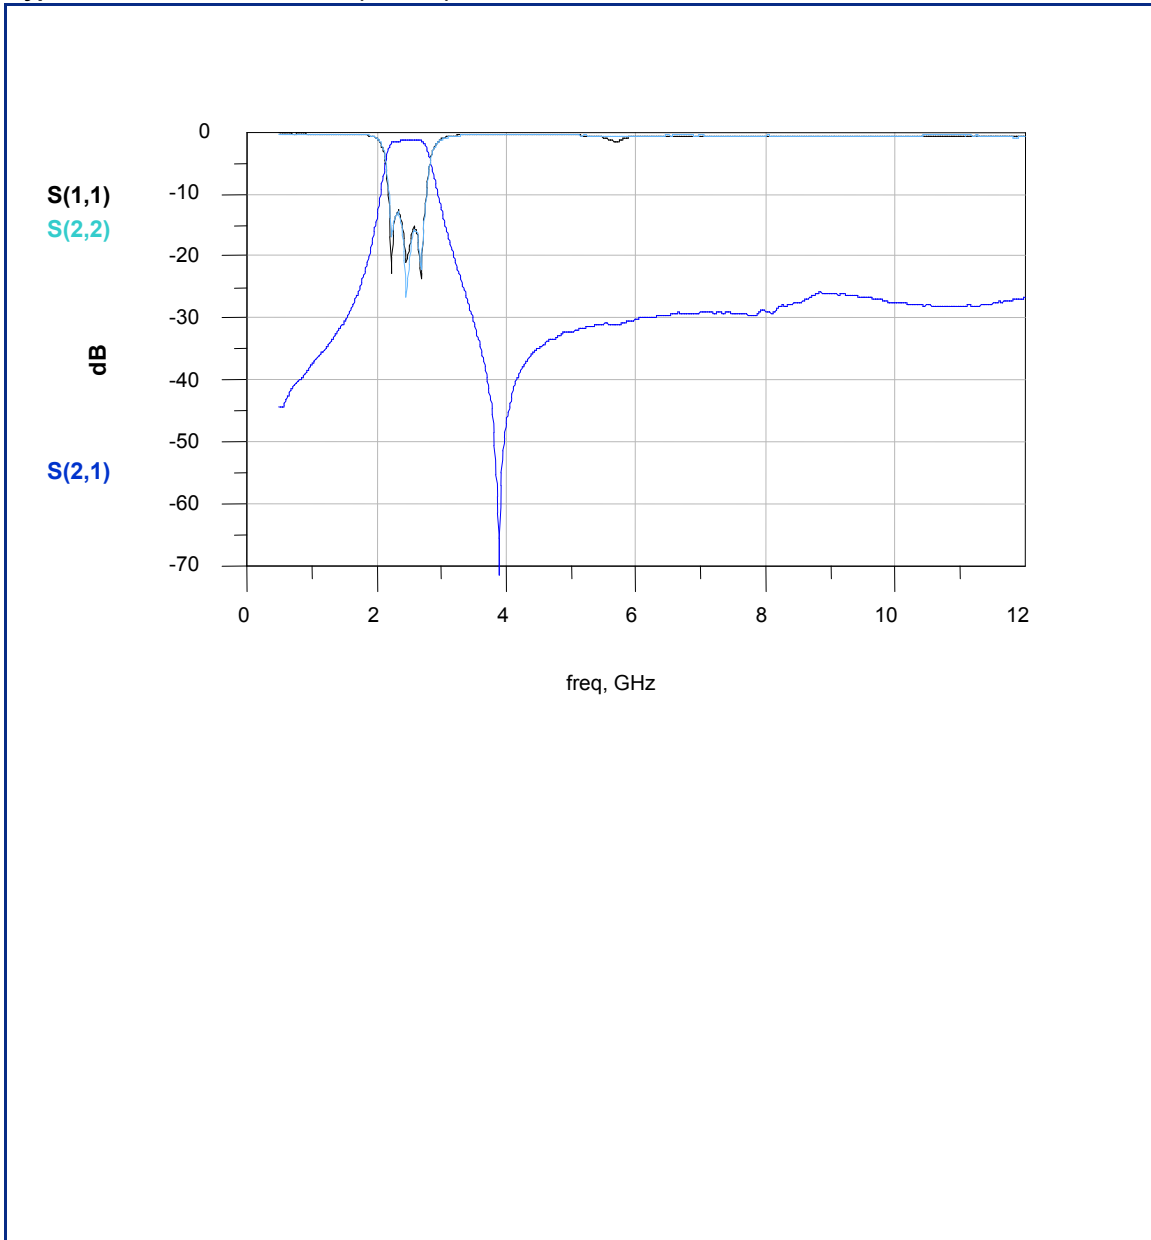

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.