

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[3600BP15M600E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

High Frequency Ceramic Solutions

3.6 GHz Band Pass Filter

P/N 3600BP15M600

Detail Specification: 07/14/05

Page 1 of 2


General Specifications

Part Number	3600BP15M600	
Frequency (MHz)	3300 - 3900	
Insertion Loss	1.8 dB max.	
Return Loss	9.5 dB min.	
Attenuation (min.)	0.1 - 2.6 Ghz	15 dB
Attenuation (min.)	4.4 Ghz	9 dB
Attenuation (min.)	6.0 - 9.9 Ghz	20 dB

Input Power	500 mW max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	4,000

Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.006	2.00 $\pm$ 0.15
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.049 $\pm$ 0.006	1.25 $\pm$ 0.15
b	0.012 $\pm$ 0.006	0.30 $\pm$ 0.15
c	0.010 $\pm$ 0.006	0.25 $\pm$ 0.15
g	0.014 $\pm$ 0.006	0.35 $\pm$ 0.15

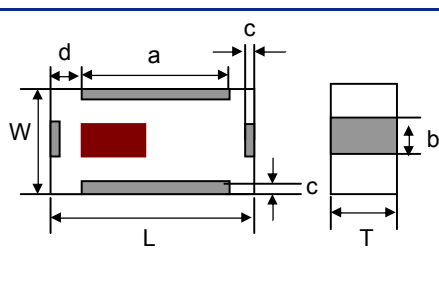

Terminal Configuration


No.	Function
1	GND
2	OUT
3	GND
4	IN

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

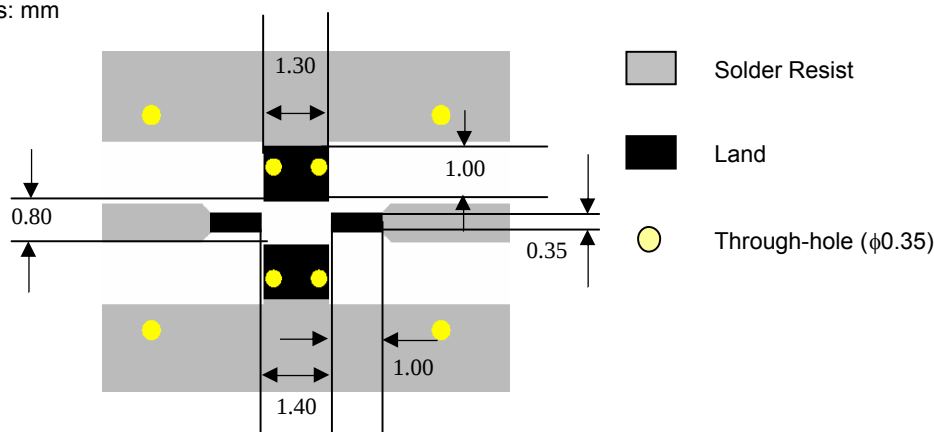

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


3.6 GHz Band Pass Filter

P/N 3600BP15M600

Detail Specification: 07/14/05

Page 2 of 2

Typical Electrical Performance (T=25°C)

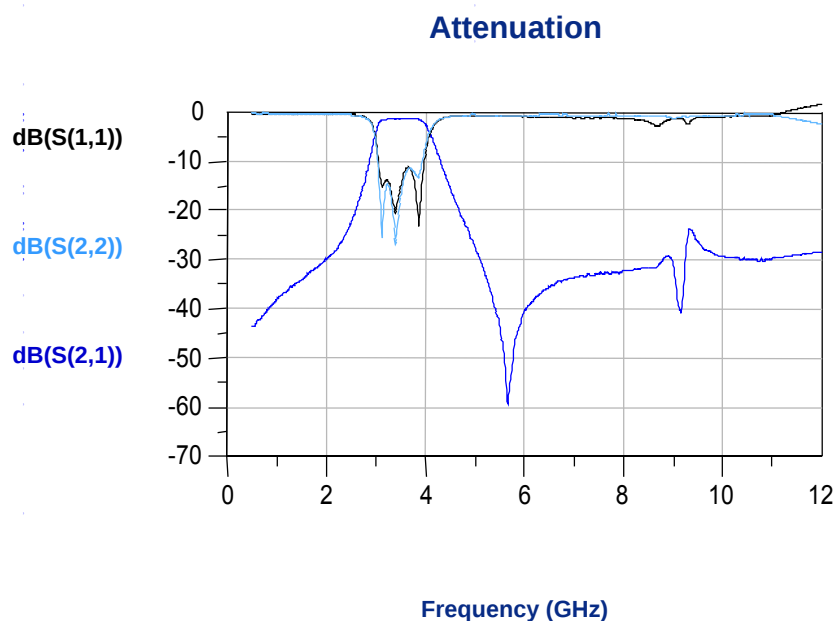

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.