

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[5515BP15B730E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

“High Frequency Ceramic Solutions”

5.5 GHz Band Pass Filter

Detail Specification

P/N 5515BP15B730



Rev. 01/29/2002 Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss	Ripple
5515BP15B730_	5150 - 5875	2.8 dB max.	30 dB @ 0.5-4.0 GHz 25 dB @ 10.3-11.8 GHz 20 dB @ 4.6 GHz	9.5 dB min.	0.7 dB max.

Input Power	Group Delay	Impedance	Operating Temperature Range
3 Watts max	5.0 nS max.	50 Ω	-40 to +85°C


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/- .008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05




Terminal Configuration

1	GND	4	GND
2	GND	5	GND
3	I/O	6	I/O



Mounting Considerations

Mount these devices with brown colored side facing up. * Line width should be designed to provide 50Ω impedance matching characteristics.

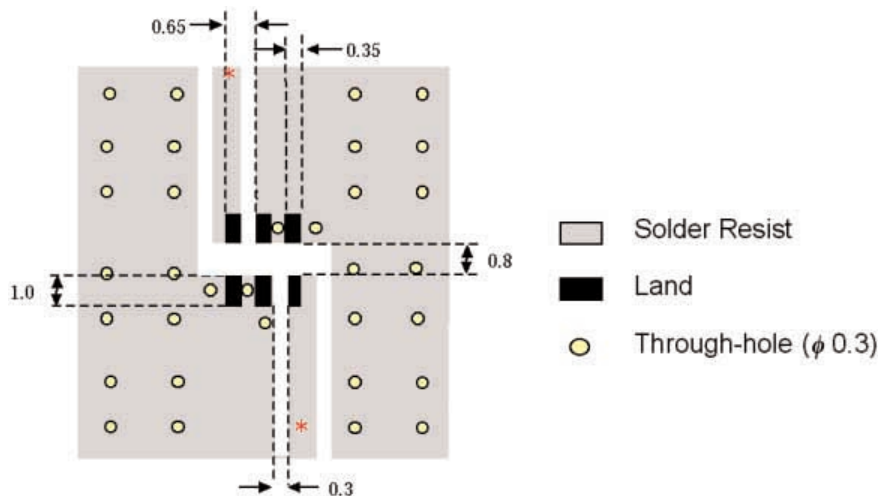

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


5.5 GHz Band Pass Filter

Detail Specification

P/N 5515BP15B730

Rev. 01/29/2002 Page 2 of 2

Typical Insertion Loss / Return Loss

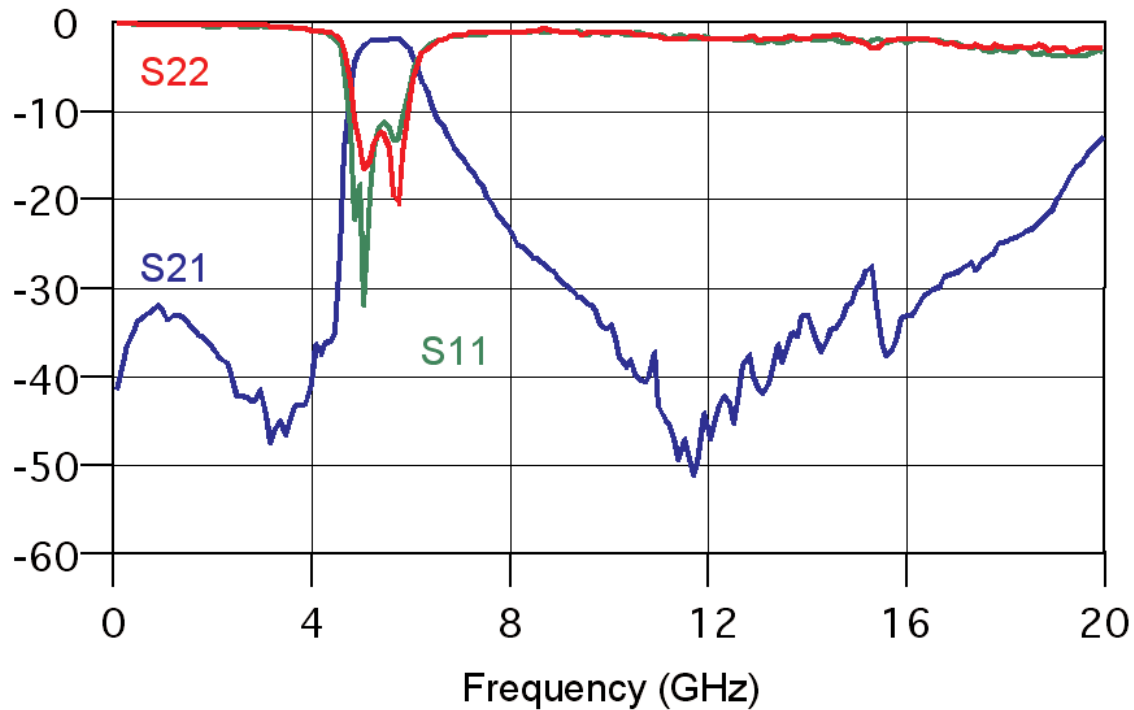

Delivery

Packaged in embossed tape on 7" reels (3000 / reel)
Standard delivery is eight weeks or sooner ARO