

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[5515BP15C1020E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

5.5 GHz Band Pass Filter for WiFi or Automotive Satellite

P/N 5515BP15C1020

Detail Specification: 02/04/2013

Page 1 of 3

General Specifications


Part Number	5515BP15C1020	Insertion Loss	1.5 dB max.
Frequency (MHz)	4900 - 5920	Input Power	2W max. (CW)
Attenuation (min.)	30 dB @ 3500 MHz	Impedance	50 Ω
Attenuation (min.)	25 dB @ 9800 - 11840 MHz	Operating Temp.	-40 to +85°C
Attenuation (min.)	5 dB @ 14700 - 17760 MHz	Recommended Storage	+5 to +35 C, Hum:45~75%RH
Return Loss	9.5 dB min.	Reel Quantity	4,000

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 5515BP15C1020S
		T & R	Suffix = T	eg. 5515BP15C1020E
		100% Tin	Suffix = None	eg. 5515BP15C1020(E or S)
	Termination style	Tin / Lead	Suffix = /Pb	eg. 5515BP15C1020S/Pb
	Eval board (50 ohm SMA)			5515BP15C1020-EB-SMA


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.006	2.00 $\pm$ 0.15
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.051 $\pm$ 0.006	1.30 $\pm$ 0.15
b	0.012 $\pm$ 0.006	0.30 $\pm$ 0.15
c	0.010 + 0.006	0.25 + 0.15
d	0.014 + 0.006	0.35 + 0.15

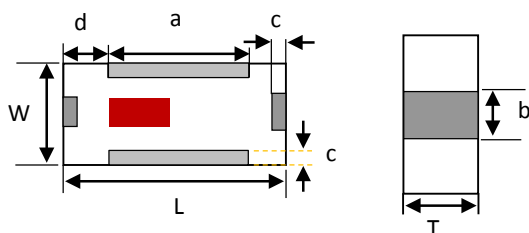

Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN



"High Frequency Ceramic Solutions"

5.5 GHz Band Pass Filter for WiFi or Automotive Satellite

P/N 5515BP15C1020


Detail Specification: 02/04/2013

Page 2 of 3

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50Ω impedance matching characteristics.

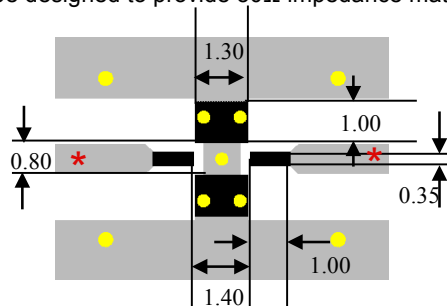

Units: mm


- Solder
- Land
- Through-hole

DC Path Internal Connections:
Pins: 1-2-3-4*

*See page 3 for internal layout
and recommended DC blocking cap

eg. 5515BP15C1020S/Pb

Typical Electrical Performance (T=25°C)

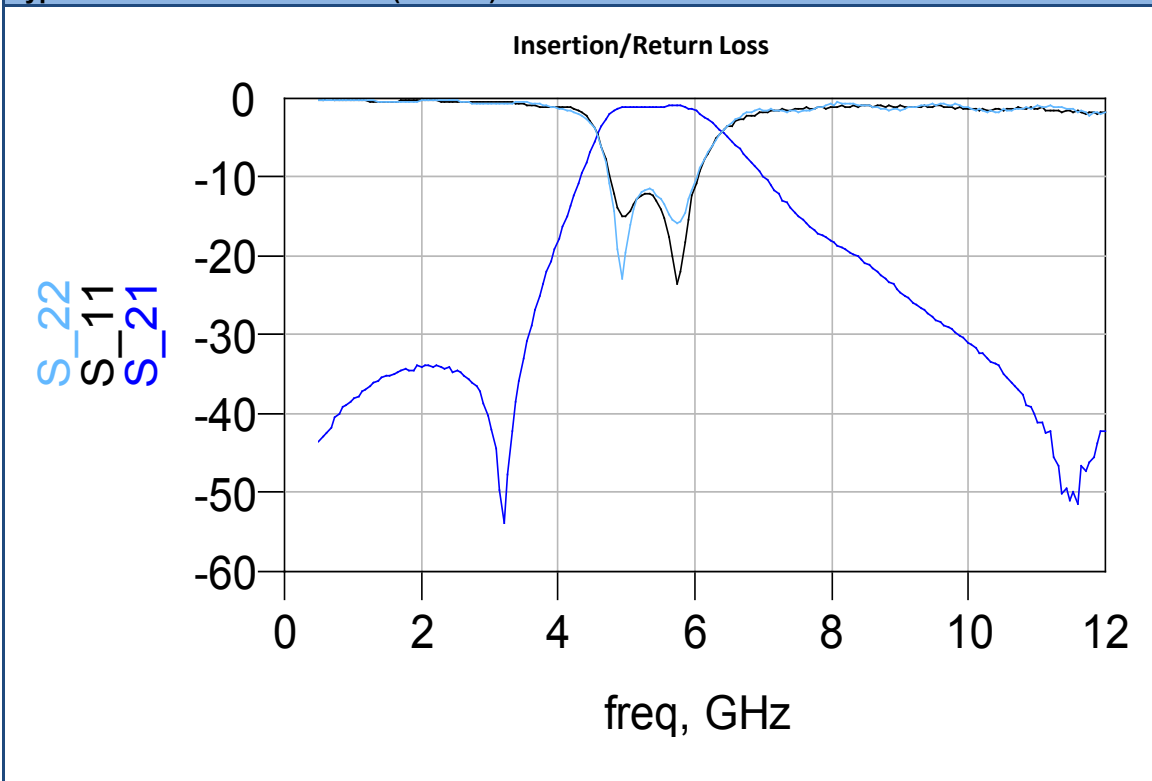

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


5.5 GHz Band Pass Filter for WiFi or Automotive Satellite

P/N 5515BP15C1020


Detail Specification: 02/04/2013

Page 3 of 3

Internal Representative Layout

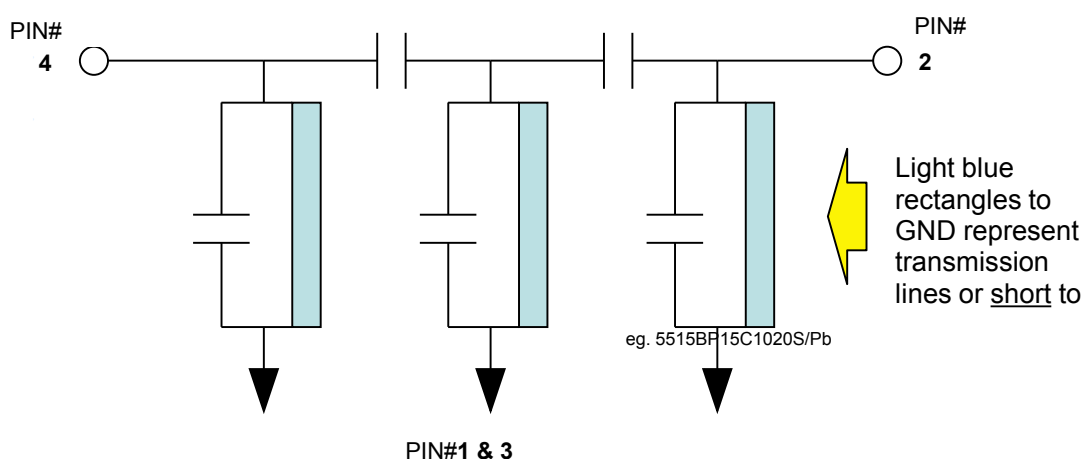

Recommended DC blocking cap value for I/O's:
2.7 - 4.7pF

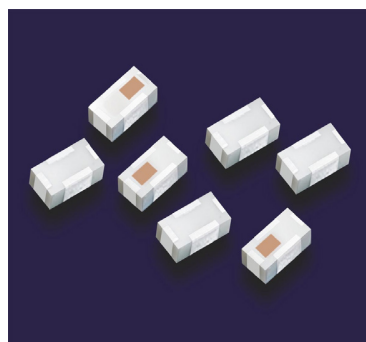

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.