

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[3550LP14A300T](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

3.5 GHz Low Pass Filter

P/N 3550LP14A300

Detail Specification: 08/22/11

Page 1 of 2

General Specifications

Part Number	3550LP14A300
Frequency (MHz)	3400 - 3700
Insertion Loss	0.65 dB max.
Return Loss	14 dB min.
Attenuation (min.)	25 dB @ 2 x f _o
Attenuation (min.)	25 dB @ 3 x f _o

Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	4000
Input Power	3 Watts max.



P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 3550LP14A300S
		T & R	Suffix = T	Eg. 3550LP14A300T (Paper Tape)
	Termination Style	100% Tin	Suffix = None	Eg. 3550LP14A300(T or S)
	Evaluation Board	3550LP14A300-EB-SMA (2-Port SMA EVB)		

Terminal Configuration

No.	Function
1	GND
2	IN
3	GND
4	GND
5	OUT
6	GND

Mechanical Dimensions

	In	mm
L	0.063 ± 0.004	1.60 ± 0.10
W	0.031 ± 0.004	0.80 ± 0.10
T	0.024 ± 0.004	0.60 ± 0.10
a	0.008 ± 0.004	0.20 ± 0.10
b	0.008 +.004/-0.006	0.20 +0.1/-0.15
c	0.006 ± 0.004	0.15 ± 0.10
g	0.012 ± 0.004	0.30 ± 0.10
p	0.020 ± 0.002	0.50 ± 0.05

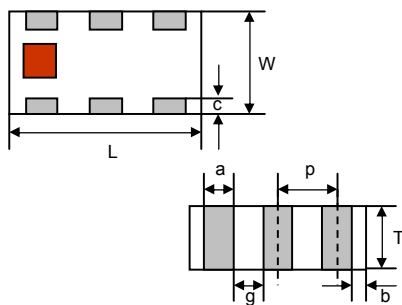


Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

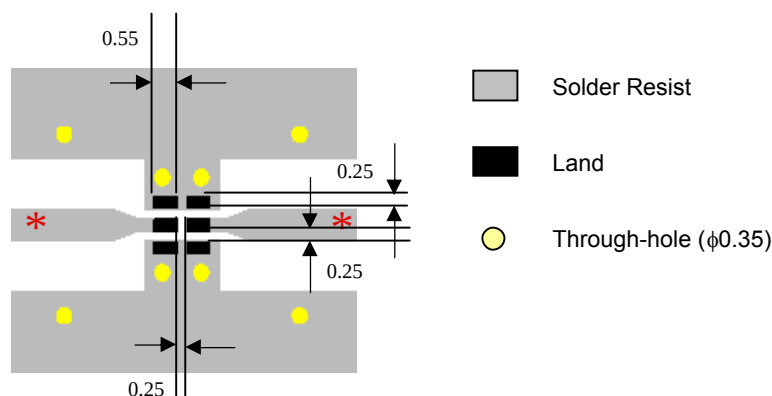

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


3.5 GHz Low Pass Filter

P/N 3550LP14A300

Detail Specification: 08/22/11

Page 2 of 2

Typical Electrical Performance (T=25°C)

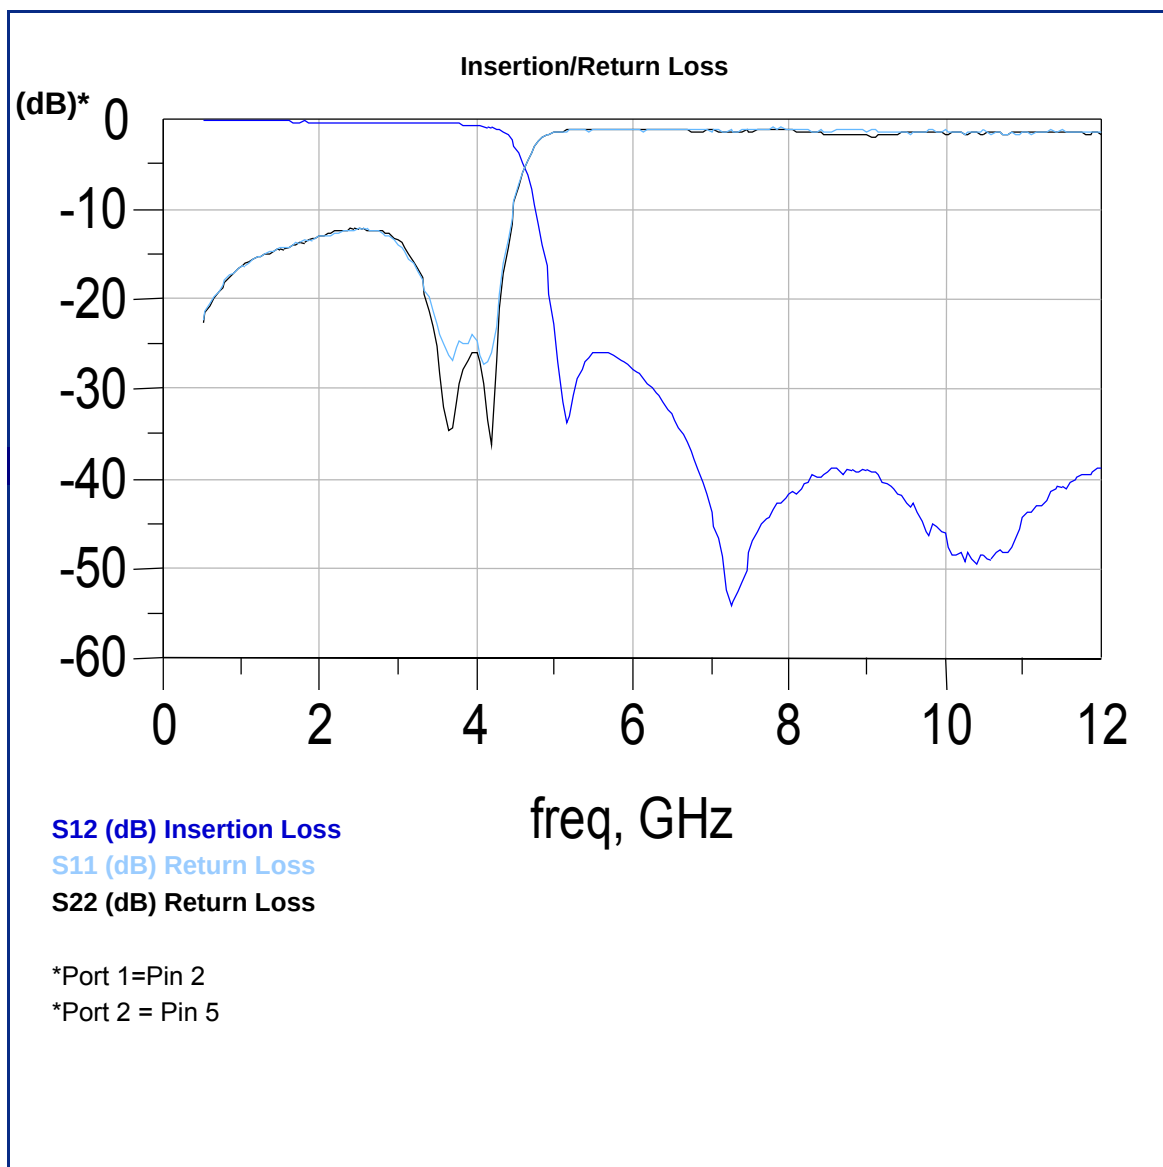

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.