

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[0898CF15A035E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

High Frequency Ceramic Solutions

898 MHz Directional Coupler/ Low Pass Filter Combination **P/N 0898CF15A035**

Detail Specification: 01/09/09 Page 1 of 2

General Specifications

Part Number	0898CF15A035	Isolation	25 dB min.
Frequency (MHz)	880 - 915	Impedance	50 Ω
Insertion Loss	0.7 dB max.	Power Capacity	2 Watts max.
Return Loss	14 dB min.	Reel Quantity	4,000
Attenuation (min.)	22 dB @ 2 x Fo	Operating Temperature	-40 to +85°C
Attenuation (min.)	17 dB @ 3 x Fo	Storage Temperature	+5 ~ +35°C, Humidity: 45~75%RH, 12 mos. Max
Coupling	20 ± 1 dB		

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 0898CF15A035S
		T & R	Suffix = E	Eg. 0898CF15A035E
	Termination Style	100% Tin	Suffix = None	Eg. 0898CF15A035(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 0898CF15A035(E or S)/Pb

Terminal Configuration	
No.	Function
1	IN
2	GND
3	Main Out
4	Termination
5	GND
6	Coupled Out

Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +.004/-.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness


Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions

898 MHz Directional Coupler/ Low Pass Filter Combination	P/N 0898CF15A035
Detail Specification: 01/09/09	Page 2 of 2

Typical Electrical Performance (T=25°C)

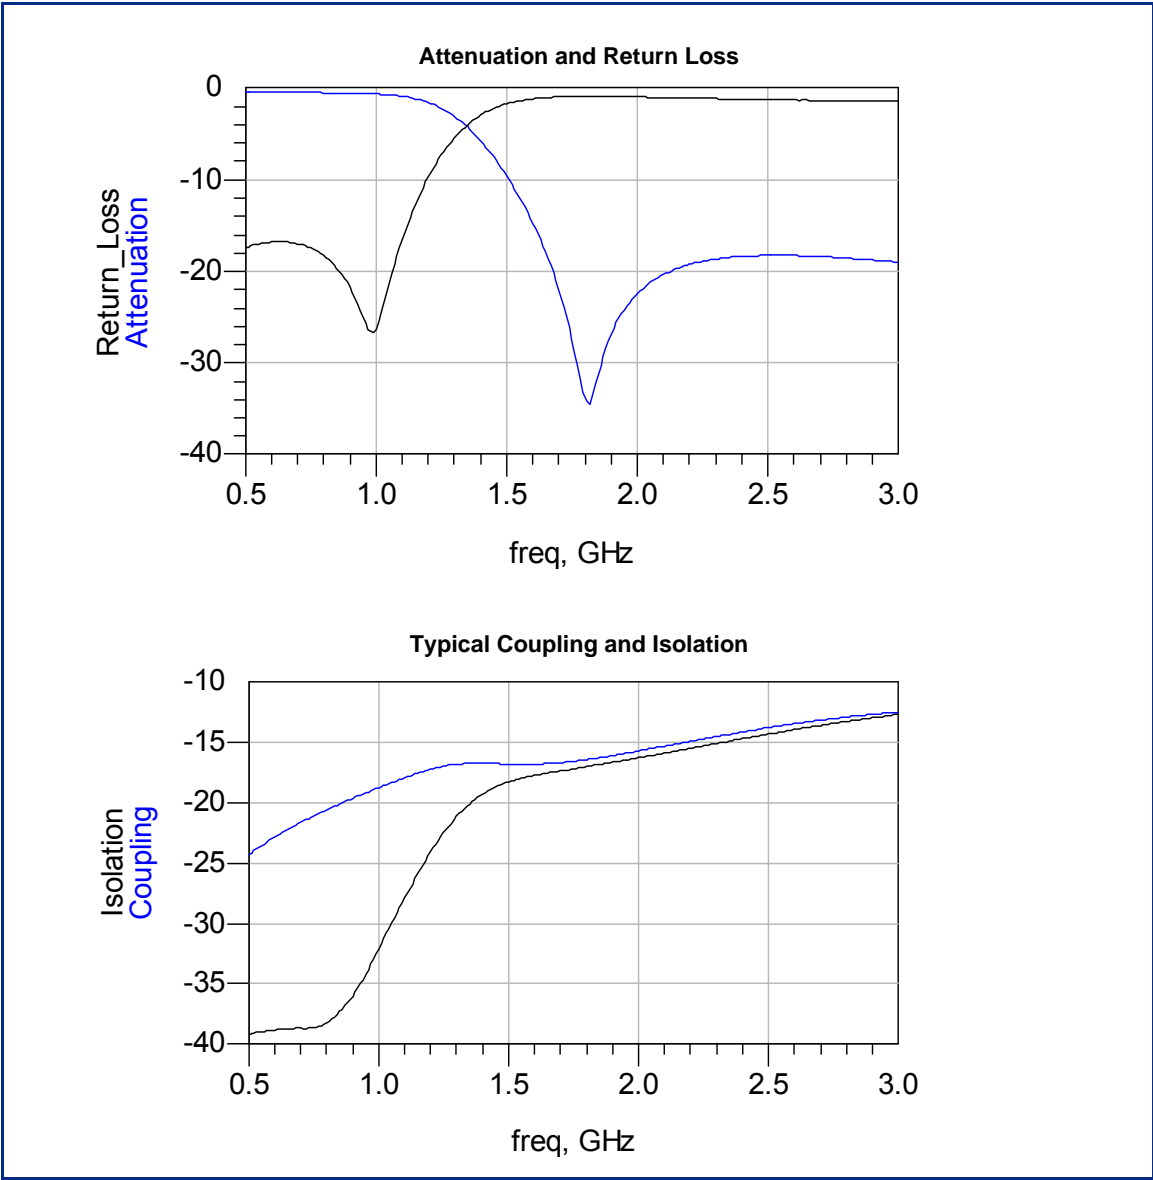

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.