

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2100BL18B200E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

2.10 GHz Balun

P/N 2100BL18B200

Detail Specification: 04/12/04

Page 1 of 2

General Specifications

Part Number	2100BL18B200
Frequency (MHz)	2000~2200
Unbalanced Impedence	50 Ω
Differential Balanced Imp.	200 Ω
Insertion Loss	0.8 dB max.
Return Loss	9.5 dB min.
Phase Difference (degree)	180 $\pm$ 10
Amplitude Difference	2 dB max.



Operating Temperature	-40 to +85°C
Reel Quantity	3,000
Power Capacity	3 Watts max.
Impedence	50 / 200 Ω

Terminal Configuration

No.	Function
1	GND or DC Feed
2	Unbalanced Port (1)
3	GND or DC Feed
4	Balanced Port (2)
5	NC
6	Balanced Port (3)

Mechanical Dimensions

	In	mm
L	0.126 $\pm$ 0.006	3.20 $\pm$ 0.15
W	0.063 $\pm$ 0.006	1.60 $\pm$ 0.15
T	0.033 $\pm$ 0.004	0.85 $\pm$ 0.10
a	0.022 $\pm$ 0.006	0.55 $\pm$ 0.15
b	0.014 $\pm$ 0.006	0.35 $\pm$ 0.15
c	0.012 $\pm$ 0.004/-0.008	0.30 $\pm$ 0.1/-0.2
g	0.016 $\pm$ 0.004	0.40 $\pm$ 0.10
p	0.039 $\pm$ 0.004	1.00 $\pm$ 0.10

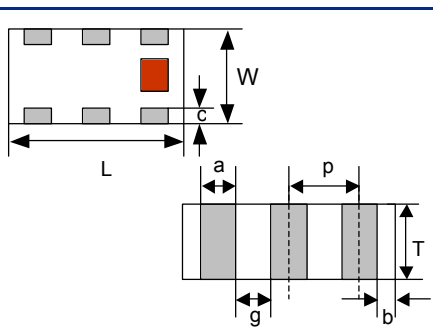


Mounting Considerations

Mount these devices with colored mark facing up.

* Line width should be designed to provide proper impedance matching characteristics.

Units: mm

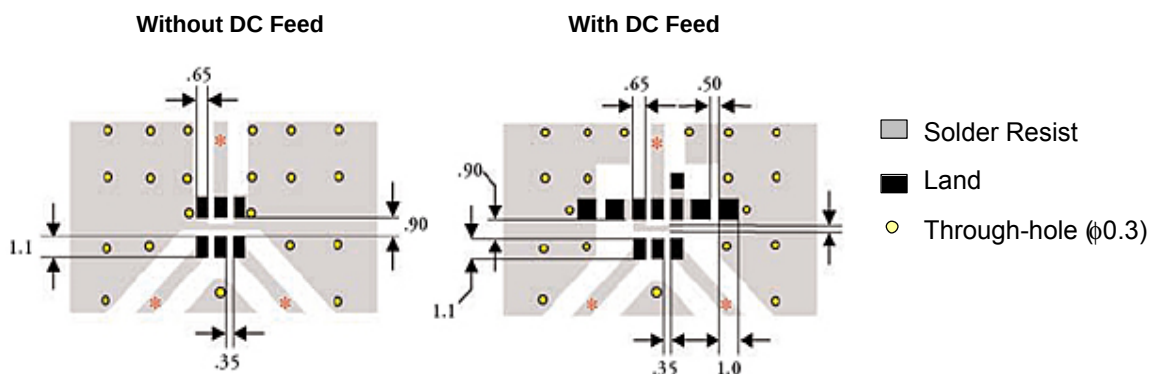

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.10 GHz Balun

P/N 2100BL18B200

Detail Specification: 04/12/04

Page 2 of 2

Typical Electrical Performance (T=25°C)

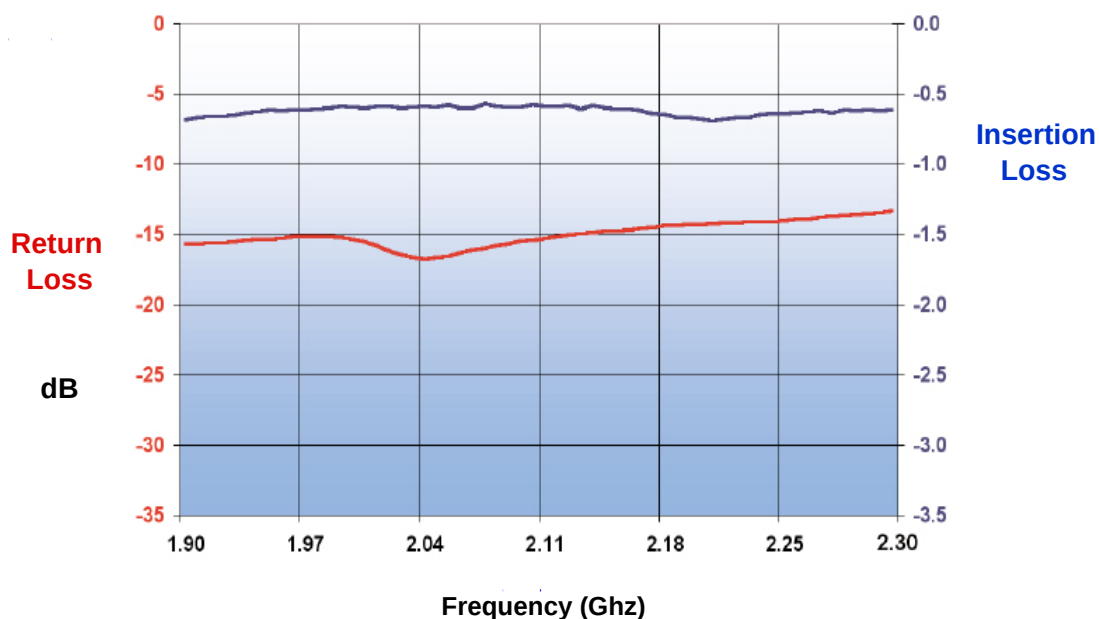

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.