

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Tripp Lite](#)
[PDUMV20](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



Tripp Lite
 1111 W. 35th Street
 Chicago, IL 60609 USA
 Telephone: 773.869.1234
 www.tripplite.com

1.9 kW Single-Phase Metered PDU, 120V Outlets (28 5-15/20R), L5-20P/5-20P Adapter, 15ft Cord, 0U Vertical

MODEL NUMBER: PDUMV20

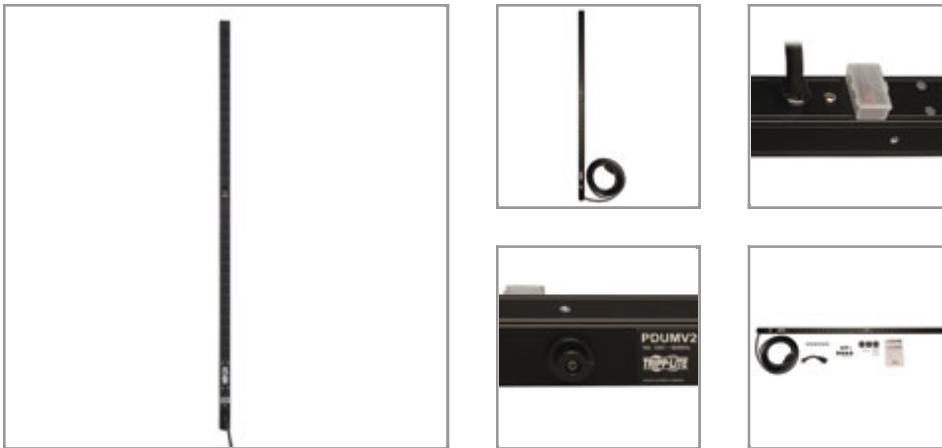

Highlights

- Metered single phase 120V 20A 0U 60in / 152cm vertical rackmount PDU
- Two-digit current meter reports output current in amps
- Attached 15ft / 4.6m cord with NEMA L5-20P plug and 5-20P adapter
- 28 NEMA 5-15/20R outlets
- Toolless button mount and bolt-down bracket installation hardware included

Package Includes

- PDUMV20 Metered Vertical PDU
- (1) L5-20P to 5-20P plug adapter
- Mounting hardware and spare mounting buttons
- Instruction manual with warranty information

Description

Tripp Lite single phase Metered PDU / Power Distribution Units offer real-time local reporting of load level in amps via built-in digital display. Enables visual monitoring of PDU load levels to prevent overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

Features

- 20A single phase 120V Metered Power Distribution Unit / PDU (Agency de-rated to 16A continuous)
- Two-digit lighted meter reports combined total output current in amps
- Attached NEMA L5-20P input plug with 15ft / 4.6m line cord and 5-20P adapter
- 0U 60in / 152cm vertical rackmount format installs using no rack spaces
- 28 NEMA 5-15/20R outlets
- Includes 20A circuit breaker and lighted power switch inside a transparent protective cover
- Toolless installation supported in button-mount compatible equipment racks
- Bolt-down installation brackets support installation in other racks and additional surfaces

Specifications

| OVERVIEW | |
|-------------------------|--|
| PDU Type | Metered |
| OUTPUT | |
| Output Capacity Details | 2.03kW (127V), 1.92kW (120V), 1.6kW (100V) / 20A total capacity (Agency de-rated to 16A); 16A max per outlet |



Tripp Lite
 1111 W. 35th Street
 Chicago, IL 60609 USA
 Telephone: 773.869.1234
 www.tripplite.com

| | |
|--|---|
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (28) 5-15/20R |
| Output Nominal Voltage | 100; 120; 127 |
| Overload Protection | 20A circuit breaker |
| INPUT | |
| PDU Input Voltage | 100; 120; 127 |
| Recommended Electrical Service | 20A 120V |
| Maximum Input Amps | 20 |
| Maximum Input Amps Details | Agency de-rated to 16A continuous |
| PDU Plug Type | NEMA 5-20P; NEMA L5-20P |
| Input Cord Length (ft.) | 15 |
| Input Cord Length (m) | 4.6 |
| Input Phase | Single-Phase |
| USER INTERFACE, ALERTS & CONTROLS | |
| Front Panel LCD Display | Digital meter reports PDU output current in amps |
| Switches | Lighted on/off switch with integrated transparent safety cover |
| PHYSICAL | |
| Shipping Dimensions (hwd / in.) | 63.25 x 3 x 2.75 |
| Shipping Dimensions (hwd / cm) | 160.66 x 7.62 x 6.99 |
| Shipping Weight (lbs.) | 6 |
| Shipping Weight (kg) | 2.72 |
| Unit Dimensions (hwd / in.) | 60 x 1.75 x 1.25 |
| Unit Dimensions (hwd / cm) | 152.4 x 4.45 x 3.18 |
| Unit Weight (lbs.) | 5.4 |
| Unit Weight (kg) | 2.45 |
| Material of Construction | Aluminum |
| Form Factors Supported | Vertical |
| PDU Form Factor | Vertical (0U) |
| CERTIFICATIONS | |
| Certifications | Tested to UL60950-1 (USA) and CAN/CSA C22.2 No. 60950-1-03 (Canada), RoHS Compliant |
| WARRANTY | |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|-------------------------------------|-------------------------|
| Product Warranty Period (Worldwide) | 2-year limited warranty |
|-------------------------------------|-------------------------|

© 2016 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<http://www.tripplite.com/products/product-certification-agencies>