

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTVK025250](#)

For any questions, you can email us directly:



sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			




- Material**
- Contact pin: Brass
 - Surface of solder tail: Tin plated
 - Threaded Insert: Brass M2.5
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical** cULus /VDE / TUV
- Voltage rating: 300V/300V/300V
 - Current rating: 15A/17A/20A
 - Withstanding Voltage: 1.6KV/2.5KV/2.5KV
 - Operating temperature: -30° C to +105° C
 - Soldering temperature: 250° C±10° C/5 Sec
 - Safety Approval: RoHS

RoHS Compliant

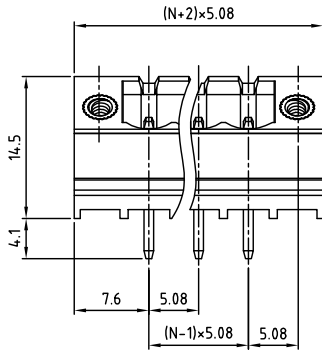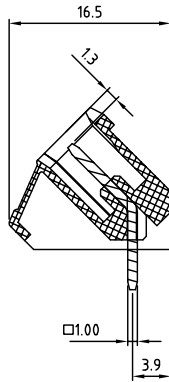

N=Number of contacts

P.C.B LAYOUT

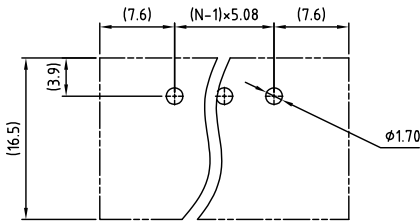

PART NUMBER:

OSTVKXX5250

- | | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Poles | 0: Black |
| 03 3 Poles | 5: Green (Standard) |
| ... | 6: Blue |
| 24 24 Poles | 8: Grey |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTVK-5.08 Series 45D with flange 2p-24p			
PART NO.	OSTVKXX5250	DWG NO.	OSTVKXX5250.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23		X: ±0.50 X.X: ±0.30 X.XX: ±0.10 X*: ±1°
SHEET: 01/01				REV: D	