

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[KAJ12LAGT](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET OF

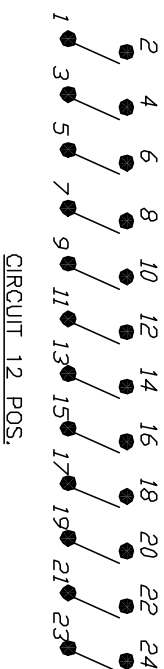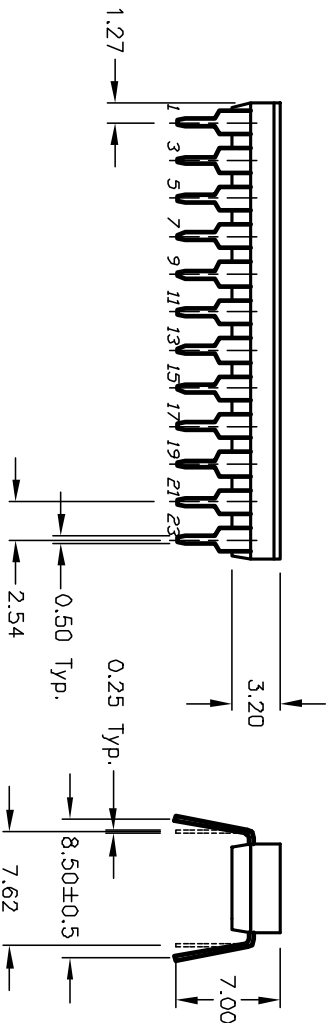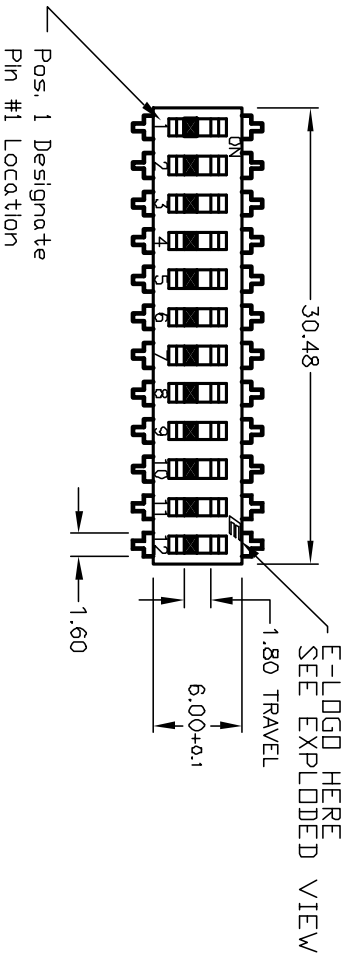

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch) 100mA @50VDC. (Corry)
5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) Copper w/Gold Plate
TERMINALS: BRASS w/Gold Plate
6. INSULATION RESISTANCE:
100 Mega-OHMS min. @500VDC
7. CONTACT RESISTANCE:
50 MILLI-OHMS typical @2-4VDC @100mA
8. OPERATING TEMP.:
-40°C to +80°C
9. PACKAGE: IN DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.
10. TOP TAPE SEAL FOR FLUX WASH

RECOMMENDED P.C.B. LAYOUT

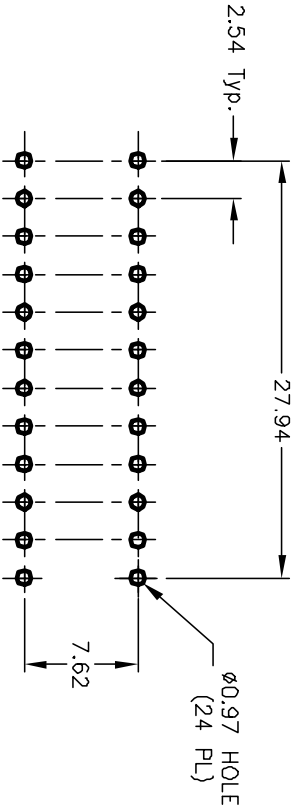

TITLE			
KAJ12 LA GT			
LOW PROFILE W/TAPE SEAL			
REV.	ECN No.	DATE	CHKD
A	12416	9/12/02	CJB
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE		DATE	DR
2:1		9/12/02	CJB
TITLE		DATE	DR
KAJ12 LA GT		9/12/02	CJB
LOW PROFILE W/TAPE SEAL		9/12/02	CJB
W823331		9/12/02	CJB
A		9/12/02	CJB

E-SWITCH®