

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions](#)
[98755-100](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

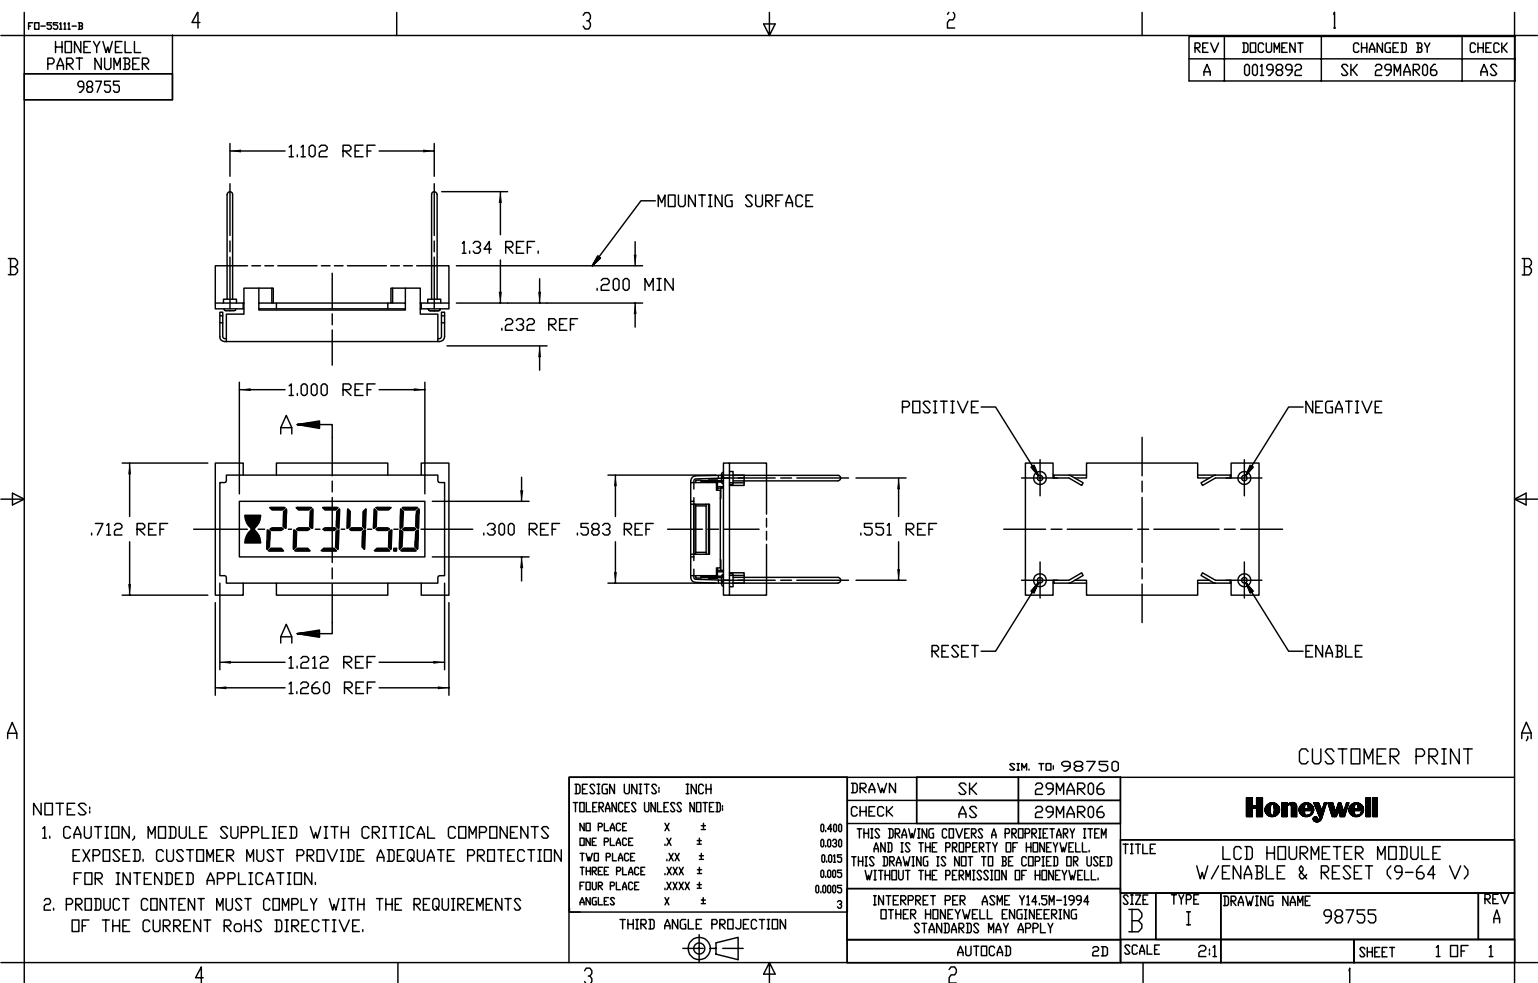

Sensing and Control
Honeywell
 PO Box 19424
 Springfield, IL 62794-9424 USA

98000 SERIES LCD HOUR METER MODULE

FEATURES/SPECIFICATIONS	LCD MODULE 98755
RANGE	0 TO 99,999.9 hours
DIGIT HEIGHT	6 mm
RUNNING INDICATOR	FLASHING Hour Glass Icon
PIN	(Positive, Negative, Enable, Reset)
Memory	EEPROM (Non-volatile Memory)
ACCURACY Steady run (OVER VOLTAGE & TEMP. RANGE)	±200 ppm ; ± 0.02%
OPERATING VOLTAGE RANGES	9 to 64 V DC (RATED AT 12 V.)
TEMPERATURE RANGE Operating Storage	-40°C TO +80°C -40°C TO +85°C
VIBRATION (per MIL - M-3971D) (per SAE J1378)	10 g's 20 g's
SHOCK (per MIL - M-3971) (per SAE J1378)	75 g's 55 g's
TRANSIENT IMMUNITY TO	LOAD DUMP INDUCTIVE E M I REVERSE POLARITY
POWER CONSUMPTION 9 - 64 V meter (power terminal)	0.8 mA @ 12 V DC
START TIME 4 PIN (Enable line) configuration	No Delay
TERMINATION Pin	0.03 inch dia.
Copyright 2007 Honeywell International Inc.	