

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TT Electronics/Optek Technology](#)  
[OPF390A](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


# Fiber Optic Transmitter

## OPF390 Series



### OPF390 Series

- Low Cost 850 nm LED technology
- Electrically isolated plastic cap package
- High thermal stability
- High optical coupling efficiency to multimode fiber
- Industrial temperature range
- 55 MHz Bandwidth

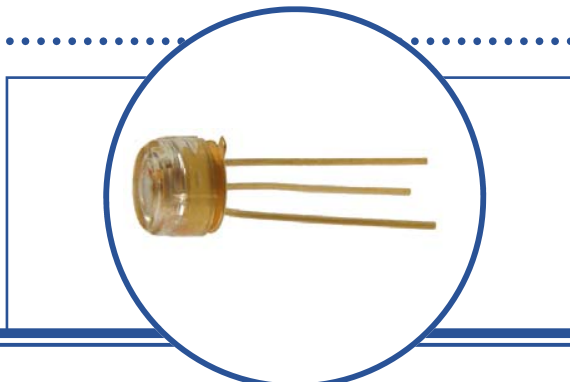

The OPF390 series fiber optic transmitters are high performance devices packaged for data communication links. This transmitter is an 850 nm GaAlAs LED and is specifically designed to efficiently launch optical power into fibers ranging in size from 50/125µm up to 200/300µm diameter fiber. Multiple power ranges with upper and lower limits are offered which allows the designer to select a device best suited for the application.

This product's combination of features including high speed and efficient coupled power makes it an ideal transmitter for integration into all types of data communications equipment.

### Applications

- ◆ Industrial Ethernet equipment
- ◆ Copper-to-fiber media conversion
- ◆ Intra-system fiber optic links
- ◆ Video surveillance systems

Typical Coupled Power I <sub>F</sub> = 100mA, 25°C						
Fiber Size	Type	N.A.	OPF390A	OPF390B	OPF390C	OPF390D
50/125 µm	Graded Index	0.20	25µW	18µW	12.5µW	7.5µW
62.5/125 µm	Graded Index	0.28	75µW	45µW	35µW	27µW
100/140 µm	Graded Index	0.29	170µW	115µW	85µW	58µW
200/300 µm	Step Index	0.41	650µW	545µW	450µW	290µW



**RoHS**

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# Fiber Optic Transmitter

## OPF390 Series



### Absolute Maximum Ratings

T<sub>A</sub> = 25° C unless otherwise noted

Storage Temperature Range	-55° C to +150° C
Operating Temperature Range	-40° C to +125° C
Lead Soldering Temperature <sup>(1)</sup>	260° C
Continuous Forward Current <sup>(2)</sup>	100 mA
Maximum Reverse Voltage	1.0 V


### Electrical/Optical Characteristics (T<sub>A</sub> = 25° C unless otherwise noted)

SYMBOL	PARAMETER	DOT	MIN	TYP	MAX	UNITS	CONDITIONS
P <sub>T50</sub> <sup>(3)</sup>	Total Coupled Power 50/125 mm Fiber NA = 0.20	OPF390A Orange	20.0	25.0		μW	I <sub>F</sub> = 100 mA
		OPF390B Green	15.0	18.0			
		OPF390C Black	10.0	12.5			
		OPF390D Silver	5.0	7.5			
V <sub>F</sub>	Forward Voltage			1.8	2.2	V	I <sub>F</sub> = 100 mA
V <sub>R</sub>	Reverse Voltage		1.8			V	I <sub>R</sub> = 100 μA
λ	Wavelength		830	850	870	nm	I <sub>F</sub> = 50 mA
Δλ	Optical Bandwidth			35		nm	I <sub>F</sub> = 50 mA
t <sub>r</sub> , t <sub>f</sub>	Rise and Fall Time			4.5	6.0	ns	I <sub>F</sub> = 100 mA; 10% to 90% <sup>(4)</sup>


Notes:

- Maximum of 5 seconds with soldering iron. Duration can be extended to 10 seconds when flow soldering. RMA flux is recommended.
- De-rate linearly at 1.0mA /°C above 25° C .
- The component must be actively aligned into the mating fiber cable assembly to achieve optimal performance.
- No Pre-bias.
- All Optek fiber optic LED products are subjected to 100% burn-in as part of its quality control process. The burn-in conditions are 96 hours at 100mA drive current and 25° C ambient temperature.

**Relative Coupled Power vs. Forward Current**

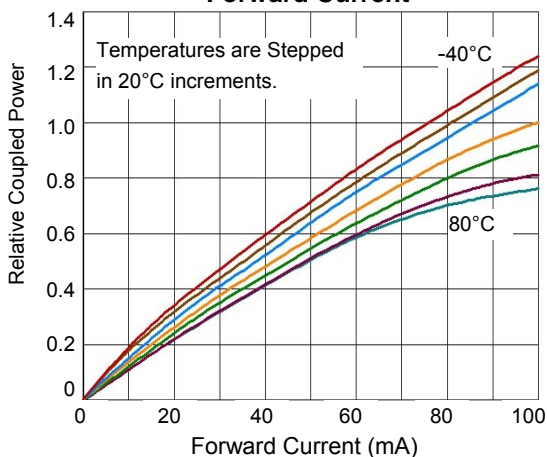

**Typical Forward Voltage vs. Forward Current**

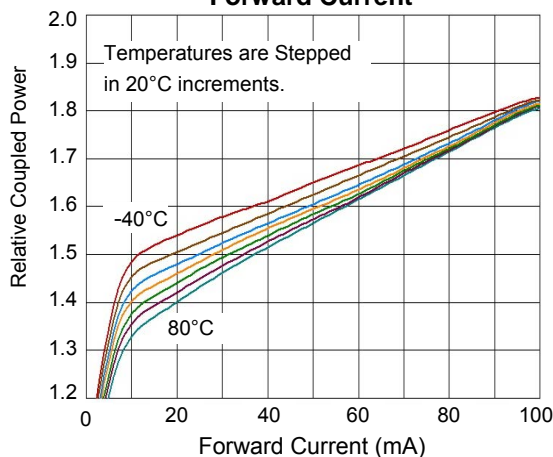


OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# Fiber Optic Transmitter

## OPF390 Series



### Mechanical Data

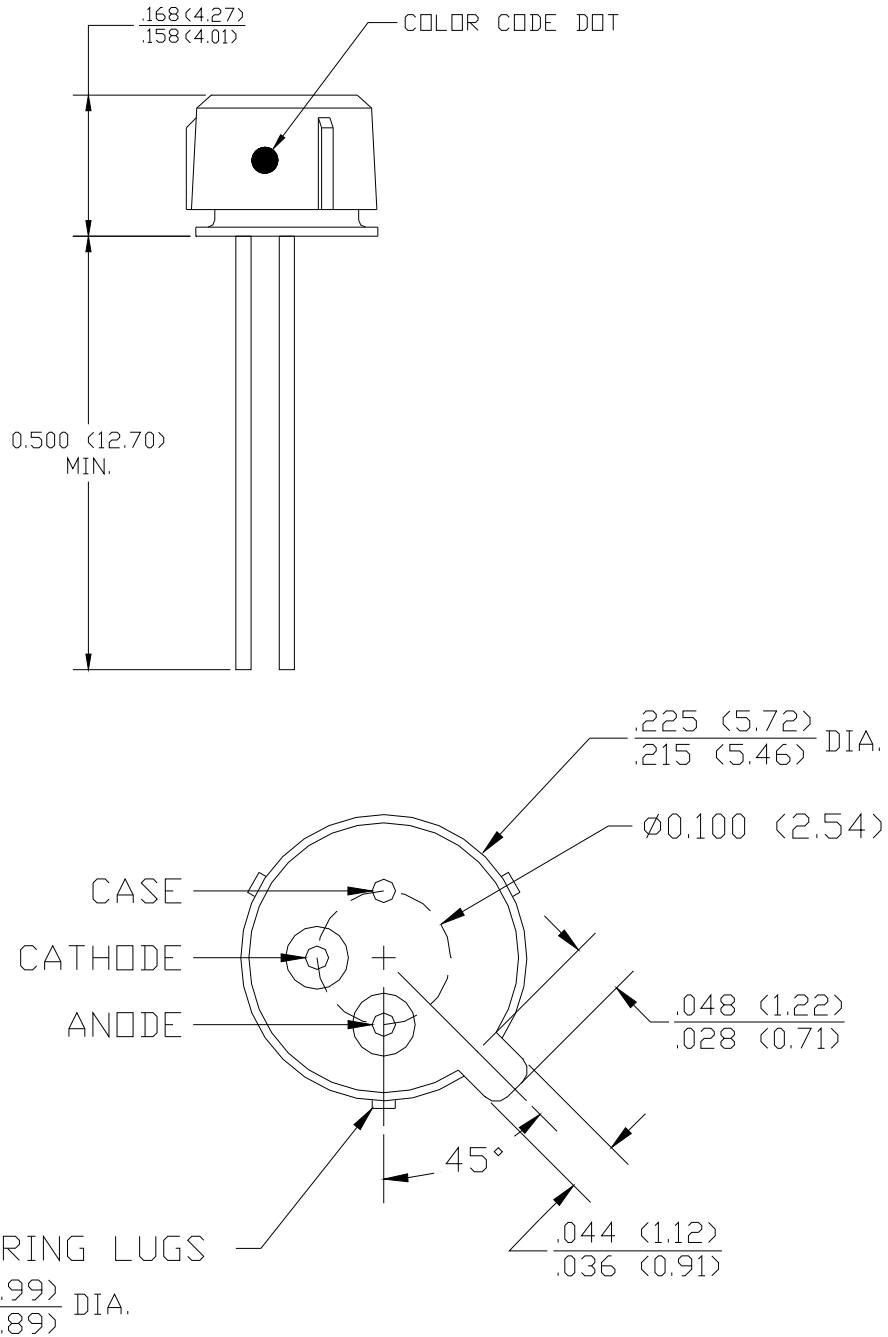

DIMENSIONS ARE IN INCHES (MILLIMETERS)

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.