

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Conec](#)

[DAH1PPAAR04A](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

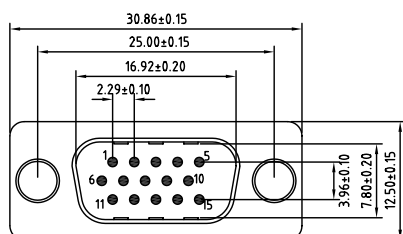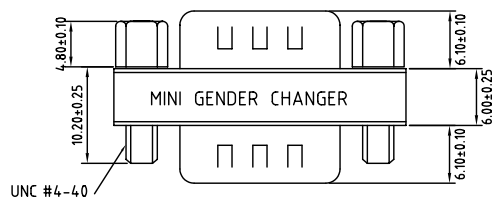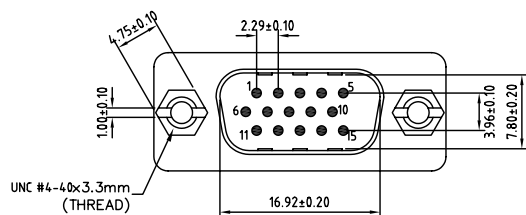

Directive 2002/95/EC
"RoHS"
Compliant

UNC #4-40 HEX Screw



HD 15 M/M GENDER CHANGER PIN OUT

15P Male 15P Male

1 1
2 2
8 8
10 10
15 15
G G

SPECIFICATIONS:

Material and Finish:

Insulator: PBT, UL94 V-0 Rated
Contacts: Brass, Gold over Nickel Plated
Shell: Steel, Tin Plated
UNC #4-40 HEX Screw: Brass, Nickel Plated

Electrical:

Current Rating: 3 A Max.
Insulation Resistance: 1000 Mohms Min. @ 500 VDC
Dielectric Withstanding Voltage: 1000 VAC / 1 Minute
Operating Temperature: -55°C To +105°C

THE FOLLOWING DRAWING HAS BEEN CREATED BY AUTOCAD 2005 AND MAY BE SUBJECT TO CHANGE WITHOUT NOTICE. ANY CHANGES TO THIS DRAWING SHALL BE THE RESPONSIBILITY OF THE USER. THE USER SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE DATA. THE USER SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE DATA. THE USER SHALL BE RESPONSIBLE FOR THE ACCURACY OF THE DATA.	tolerance unless otherwise specified tolerances shall be as follows Decimal: ±0.20 mm: ±0.25		finish		 Dim. in mm		scale:		SPECIFICATIONS					
	Angles:						material:							
				2007	date	name	title:		HD 15P Male/Male Gender Changer					
				draw.	June 28	Vincent Ke	RoHS Compliant							
				appl.	June 28	J. Chaudry					drawing no.:			
				norm									AutoCAD 2005	
				o-cls										
							16K1A1656		sheet 1/1					
											DAH1PPAAR04A			
rev	origin	date	name			drawing no.:		AutoCAD 2005						
						16K1A1656		DIN A3						
						part no.:		DAH1PPAAR04A						