

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)

[DSSK10-018A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Power Schottky Rectifier with common cathode


$$I_{FAV} = 2 \times 5 \text{ A}$$

$$V_{RRM} = 180 \text{ V}$$


$$V_F = 0.62 \text{ V}$$

Preliminary Data

V_{RSM}	V_{RRM}	Type
V	V	
180	180	DSSK 10-018A



TO-220 AB



A = Anode, C = Cathode , TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		35	A
I_{FAV}	$T_C = 165^\circ\text{C}$; rectangular, $d = 0.5$	5	A
I_{FAV}	$T_C = 165^\circ\text{C}$; rectangular, $d = 0.5$; per device	10	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	120	A
E_{AS}	$I_{AS} = \text{tbd A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	tbd	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	tbd	A
$(dv/dt)_{cr}$		tbd	V/ μs
T_{VJ}		-55...+175	$^\circ\text{C}$
T_{VJM}		175	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	90	W
M_d	mounting torque	0.4...0.6	Nm
Weight	typical	2	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$		0.3 mA
	$T_{VJ} = 100^\circ\text{C}$ $V_R = V_{RRM}$		2.5 mA
V_F	$I_F = 5 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.62 V
	$I_F = 5 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$		0.78 V
	$I_F = 10 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.68 V
R_{thJC}		0.5	1.7 K/W
R_{thCH}			K/W

Dimensions see outlines.pdf

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
 Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.



DSSK 10-018A

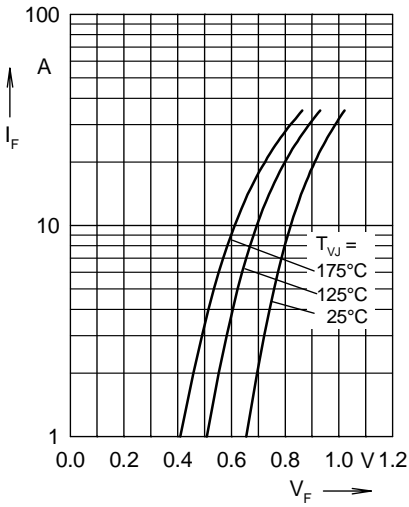


Fig. 1 Maximum forward voltage drop characteristics

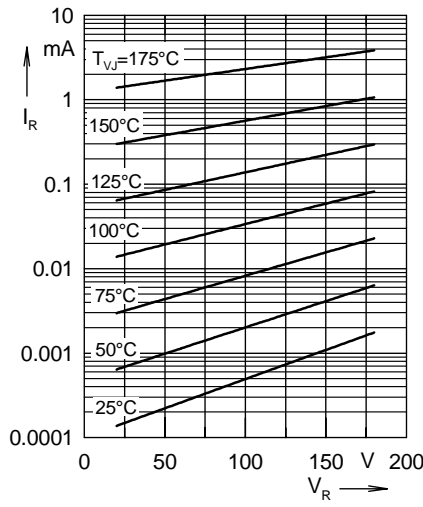


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

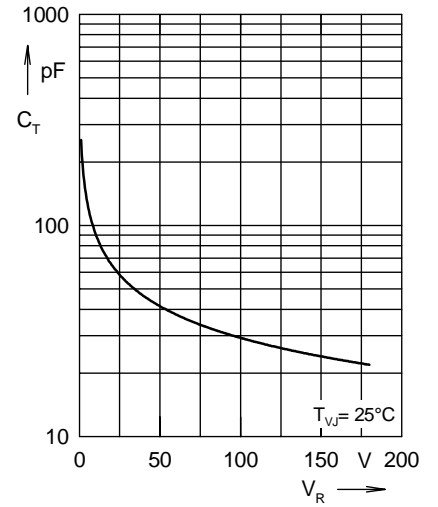


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

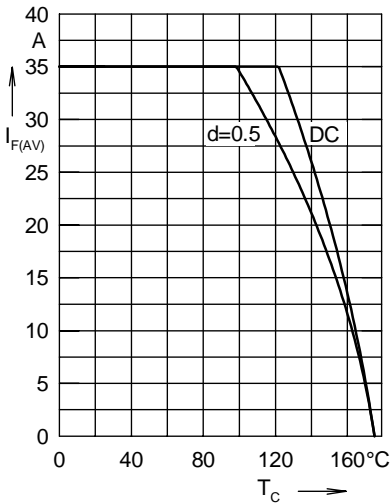


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

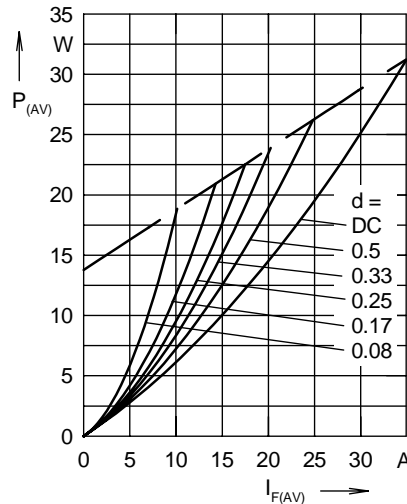


Fig. 5 Forward power loss characteristics

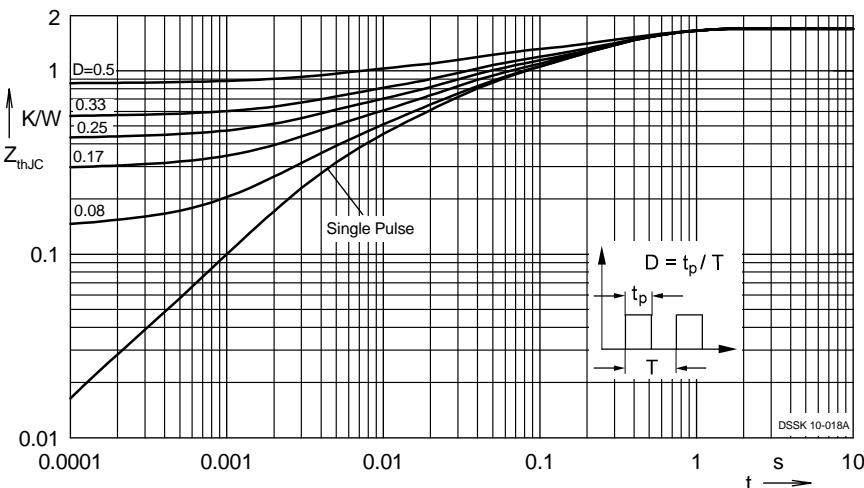


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode