

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)  
[DSSK16-01A](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)




**DSSK 16-01A**  
**DSSK 16-01AS**


# Power Schottky Rectifier with common cathode

$I_{FAV} = 2x8 \text{ A}$   
 $V_{RRM} = 100 \text{ V}$   
 $V_F = 0.63 \text{ V}$


$V_{RSM}$	$V_{RRM}$	Type
V	V	
100	100	DSSK 16-01A
100	100	DSSK 16-01AS



**TO-220 AB**  
(A-Type)



**TO-263 AB**  
(AS-Type)



A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
$I_{FRMS}$		35	A
$I_{FAV}$	$T_C = 165^\circ\text{C}$ ; rectangular, $d = 0.5$	8	A
$I_{FAV}$	$T_C = 165^\circ\text{C}$ ; rectangular, $d = 0.5$ ; per device	16	A
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}$ ; $t_p = 10 \text{ ms}$ (50 Hz), sine	120	A
$E_{AS}$	$I_{AS} = 5 \text{ A}$ ; $L = 100 \mu\text{H}$ ; $T_{VJ} = 25^\circ\text{C}$ ; non repetitive	1.3	mJ
$I_{AR}$	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$ ; repetitive	0.8	A
$(dv/dt)_{cr}$		5000	V/ $\mu\text{s}$
$T_{VJ}$		-55...+175	$^\circ\text{C}$
$T_{VJM}$		175	$^\circ\text{C}$
$T_{stg}$		-55...+150	$^\circ\text{C}$
$P_{tot}$	$T_C = 25^\circ\text{C}$	90	W
$M_d$	mounting torque (Version A only)	0.4...0.6	Nm
<b>Weight</b>	typical	2	g

## Features

- International standard package
- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{RM}$ -values
- Epoxy meets UL 94V-0

## Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

## Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see Outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
$I_R$ ①	$V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ\text{C}$	0.3	mA
	$V_R = V_{RRM}$ ; $T_{VJ} = 125^\circ\text{C}$	2.5	mA
$V_F$	$I_F = 8 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$	0.63	V
	$I_F = 8 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$	0.81	V
	$I_F = 16 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$	0.75	V
$R_{thJC}$		1.7	K/W
$R_{thCH}$ (Version A only)		0.5	K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %  
Data according to IEC 60747 and per diode unless otherwise specified.

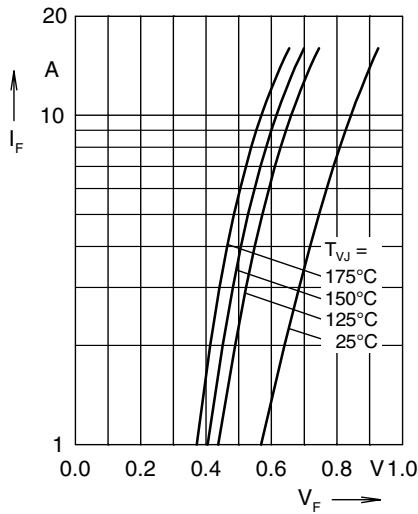


Fig. 1 Max. forward voltage drop characteristics

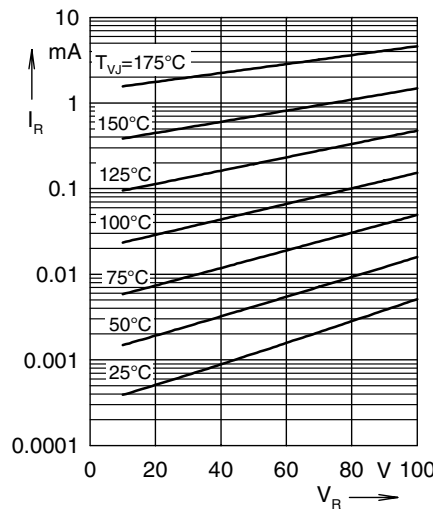


Fig. 2 Typ. reverse current  $I_R$  versus reverse voltage

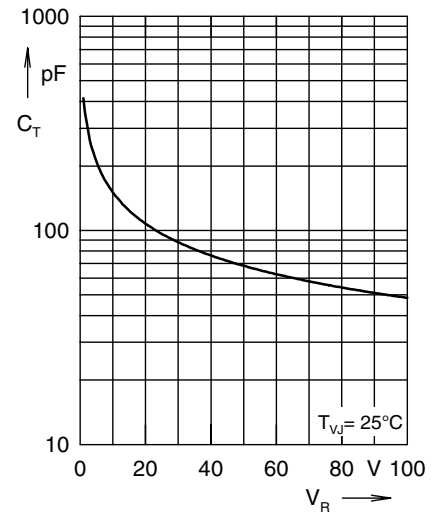


Fig. 3 Typ. junction capacitance  $C_T$  versus reverse voltage  $V_R$

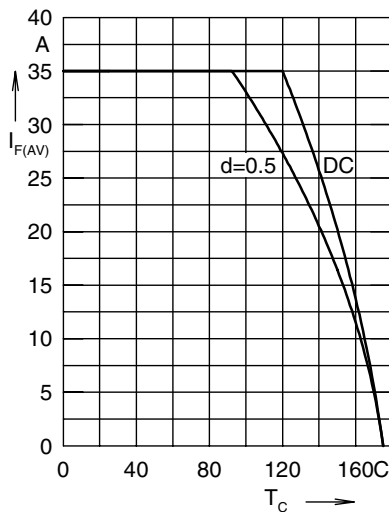


Fig. 4 Avg. forward current  $I_{F(AV)}$  vs. case temperature  $T_C$

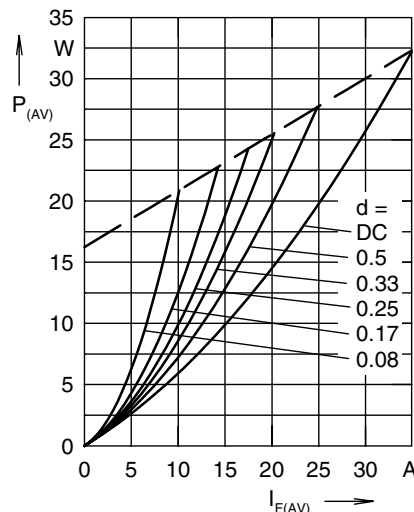


Fig. 5 Forward power loss characteristics

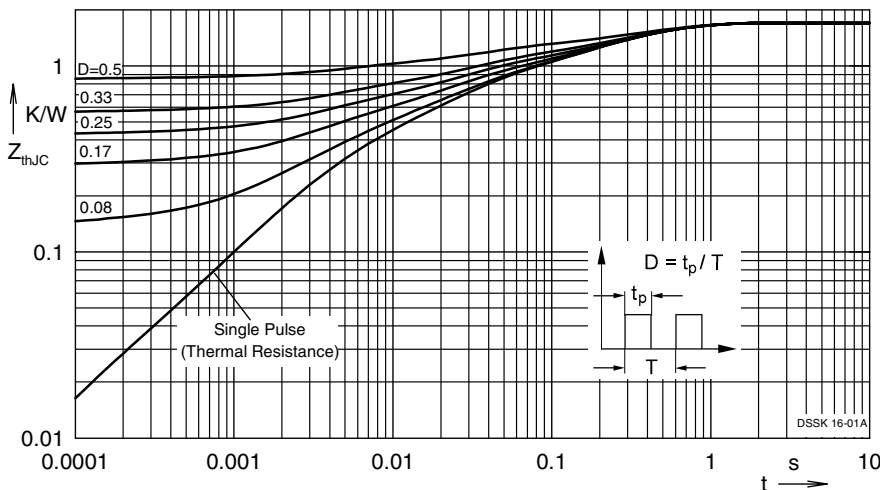


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per Diode