

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[IXYS Corporation](#)
[DSSK40-006B](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


Power Schottky Rectifier with common cathode

$I_{FAV} = 2 \times 20 \text{ A}$
 $V_{RRM} = 60 \text{ V}$
 $V_F = 0.50 \text{ V}$

V_{RSM}	V_{RRM}	Type
V	V	
60	60	DSSK 40-006B



TO-247 AD

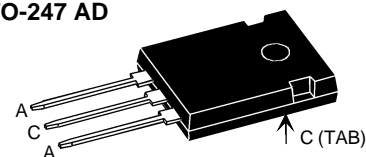

A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		70	A
I_{FAV}	$T_C = 130^\circ\text{C}$; rectangular, $d = 0.5$	20	A
I_{FAV}	$T_C = 130^\circ\text{C}$; rectangular, $d = 0.5$; per device	40	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	500	A
E_{AS}	$I_{AS} = \text{tbd A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	tbd	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	tbd	A
$(dv/dt)_{cr}$		tbd	V/ μs
T_{VJ}		-55...+150	$^\circ\text{C}$
T_{VJM}		150	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	150	W
M_d	mounting torque	0.8...1.2	Nm
Weight	typical	6	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$		20 mA
	$T_{VJ} = 100^\circ\text{C}$ $V_R = V_{RRM}$		175 mA
V_F	$I_F = 20 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.50 V
	$I_F = 20 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$		0.53 V
	$I_F = 40 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.60 V
R_{thJC}		0.25	1.1 K/W
R_{thCH}			K/W

Dimensions see outlines.pdf

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
 Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.