

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)

[MEA250-12DA](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Fast Recovery Epitaxial Diode (FRED) Module

MEA 250-12 DA
MEK 250-12 DA
MEE 250-12 DA

V_{RRM} = 1200 V
I_{FAVM} = 260 A
t_{rr} = 450 ns

Preliminary data

| V _{RSM} V | V _{RRM} V | Type | MEK 250-12DA | MEE 250-012DA |
|-----------------------|-----------------------|------|--------------|---------------|
| 1200 | 1200 | | | |



| Symbol | Test Conditions | Maximum Ratings | |
|---------------------|--|-----------------|------------------|
| I _{FRMS} | T _C = 75°C | 367 | A |
| I _{FAVM} ① | T _C = 75°C; rectangular, d = 0.5 | 260 | A |
| I _{FRM} | t _p < 10 μs; rep. rating, pulse width limited by T _{VJM} | 1480 | A |
| I _{FSM} | T _{VJ} = 45°C; t = 10 ms (50 Hz), sine | 2400 | A |
| | t = 8.3 ms (60 Hz), sine | 2640 | A |
| I ² t | T _{VJ} = 150°C; t = 10 ms (50 Hz), sine | 2160 | A |
| | t = 8.3 ms (60 Hz), sine | 2380 | A |
| I ² t | T _{VJ} = 45°C; t = 10 ms (50 Hz), sine | 28800 | A ² s |
| | t = 8.3 ms (60 Hz), sine | 29300 | A ² s |
| I ² t | T _{VJ} = 150°C; t = 10 ms (50 Hz), sine | 23300 | A ² s |
| | t = 8.3 ms (60 Hz), sine | 23800 | A ² s |
| T _{VJ} | | -40...+150 | °C |
| T _{stg} | | -40...+125 | °C |
| T _{Smax} | | 110 | °C |
| P _{tot} | T _e = 25°C | 875 | W |
| V _{ISOL} | 50/60 Hz, RMS t = 1 min | 3000 | V~ |
| | I _{ISOL} ≤ 1 mA t = 1 s | 3600 | V~ |
| M _d | Mounting torque (M6) | 2.25-2.75/20-25 | Nm/lb.in. |
| | Terminal connection torque (M6) | 4.50-5.50/40-48 | Nm/lb.in. |
| d _s | Creeping distance on surface | 12.7 | mm |
| d _A | Strike distance through air | 9.6 | mm |
| a | Maximum allowable acceleration | 50 | m/s ² |
| Weight | | 150 | g |

Features

- International standard package with DCB ceramic base plate
- Planar passivated chips
- Short recovery time
- Low switching losses
- Soft recovery behaviour
- Isolation voltage 3600 V~
- UL registered E 72873

Applications

- Antiparallel diode for high frequency switching devices
- Free wheeling diode in converters and motor control circuits
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages


- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

| Symbol | Test Conditions | Characteristic Values (per diode) | |
|-------------------|---|---|-----------|
| | | typ. | max. |
| I _R | T _{VJ} = 25°C | V _R = V _{RRM} | 12 mA |
| | T _{VJ} = 25°C | V _R = 0.8 • V _{RRM} | 3 mA |
| | T _{VJ} = 125°C | V _R = 0.8 • V _{RRM} | 60 mA |
| V _F | I _F = 150 A; T _{VJ} = 125°C | | 1.38 V |
| | T _{VJ} = 25°C | | 1.69 V |
| | I _F = 260 A; T _{VJ} = 125°C | | 1.54 V |
| | T _{VJ} = 25°C | | 1.80 V |
| V _{T0} | For power-loss calculations only | | 1.16 V |
| r _T | | | 1.46 mΩ |
| R _{thJH} | DC current | | 0.228 K/W |
| R _{thJC} | DC current | | 0.143 K/W |
| t _{rr} | I _F = 300 A V _R = 600 V -di/dt = 400 A/μs | T _{VJ} = 100°C | 450 ns |
| | | T _{VJ} = 25°C | 55 ns |
| | | T _{VJ} = 100°C | 83 ns |

① I_{FAVM} rating includes reverse blocking losses at T_{VJM}, V_R = 0.6 V_{RRM}, duty cycle d = 0.5
Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

Dimensions in mm (1 mm = 0.0394")

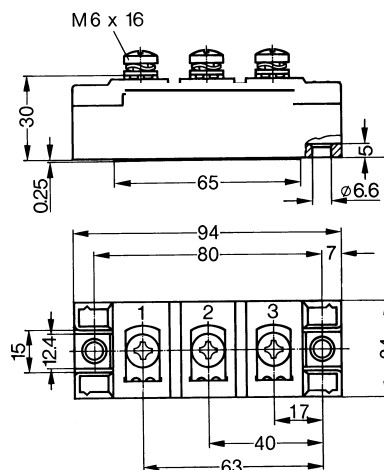

IXYS **MEA 250-12 DA MEE 250-12 DA MEK 250-12 DA**

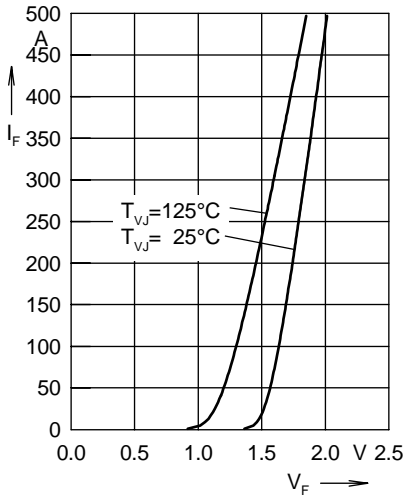


Fig. 1 Forward current I_F versus voltage drop V_F per leg

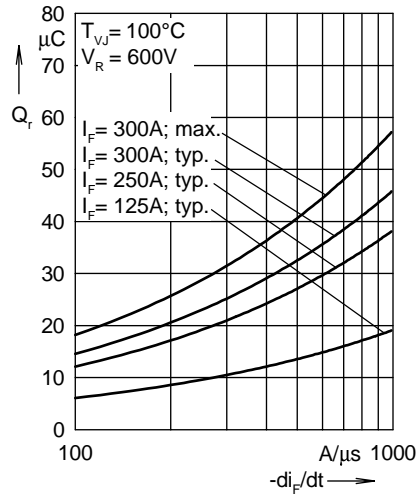


Fig. 2 Reverse recovery charge Q_r versus $-di_F/dt$

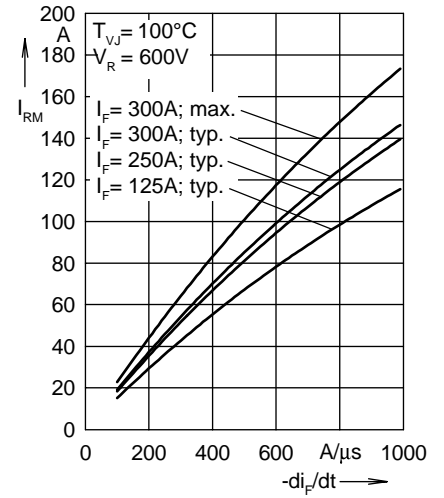


Fig. 3 Peak reverse current I_{RM} versus $-di_F/dt$

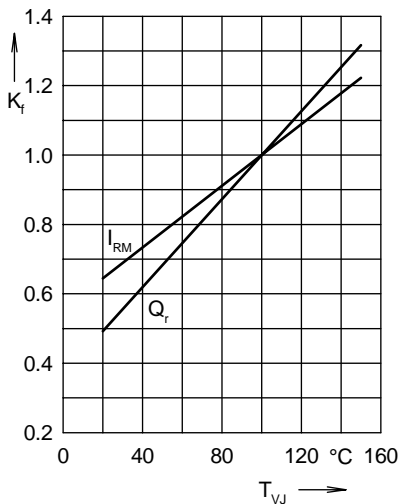


Fig. 4 Dynamic parameters Q_r , I_{RM} versus junction temperature T_{VJ}

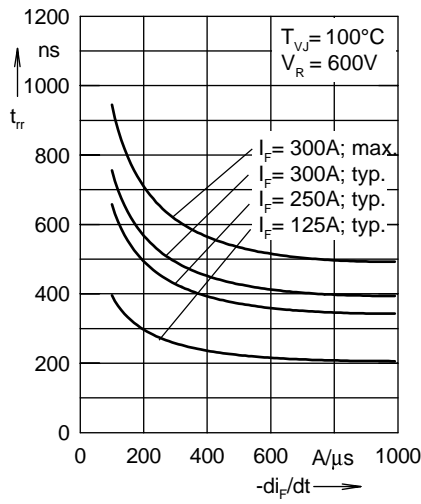


Fig. 5 Recovery time t_{rr} versus $-di_F/dt$

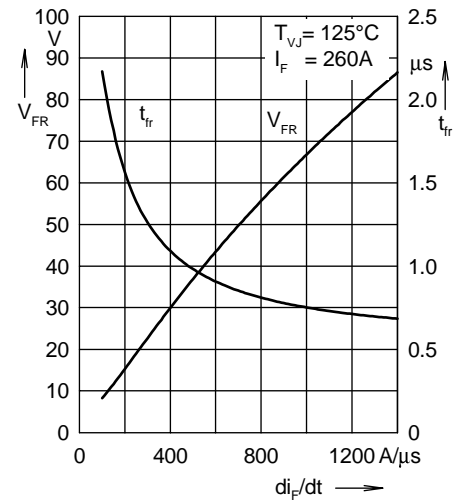


Fig. 6 Peak forward voltage V_{FR} and t_{tr} versus di_F/dt

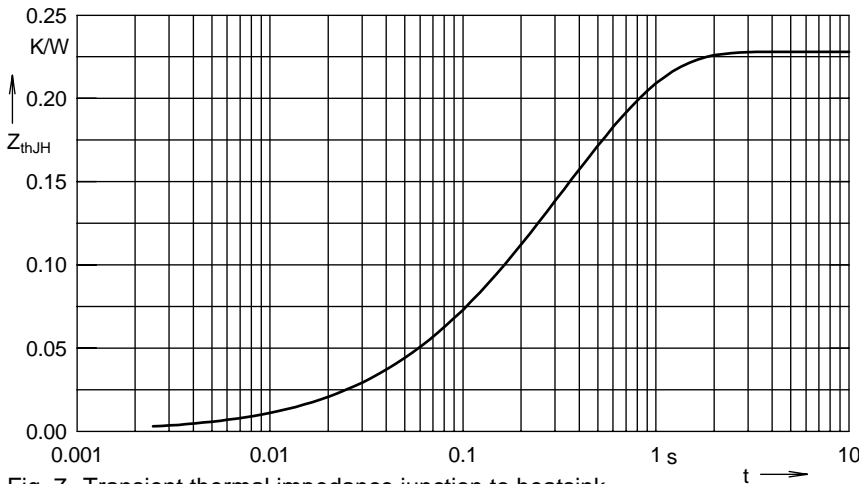


Fig. 7 Transient thermal impedance junction to heatsink

Constants for Z_{thJS} calculation:

| i | R_{thi} (K/W) | t_i (s) |
|---|-----------------|-----------|
| 1 | 0.002 | 0.08 |
| 2 | 0.008 | 0.024 |
| 3 | 0.054 | 0.112 |
| 4 | 0.164 | 0.464 |